MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V3–2900

CK–X2948

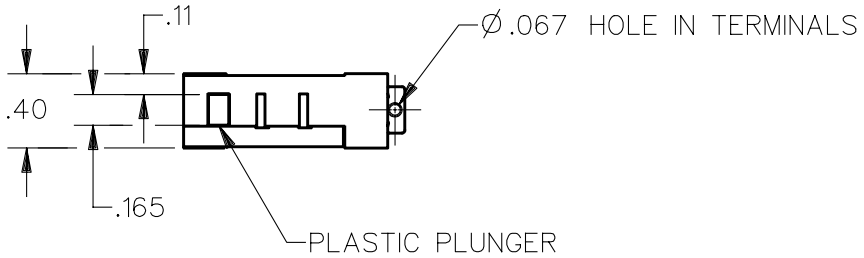

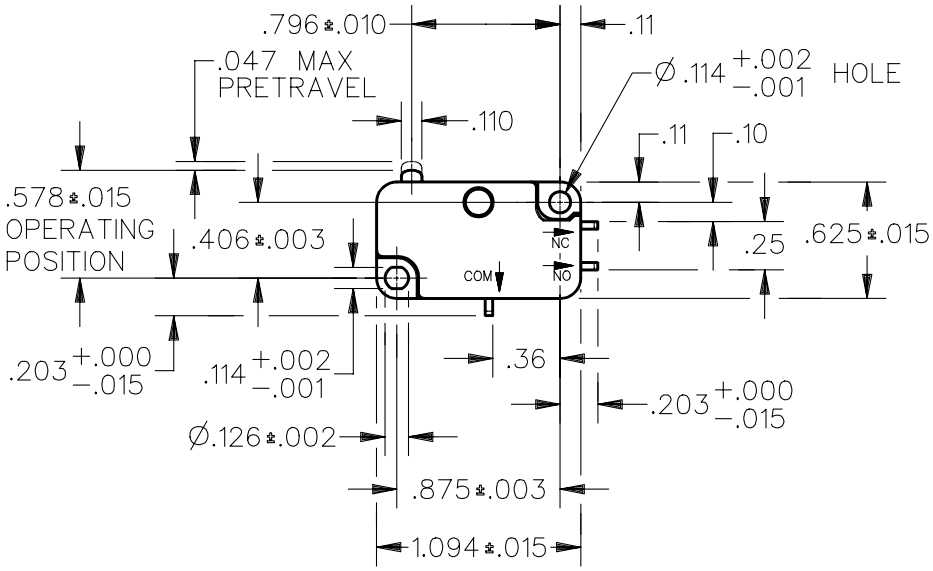

NOTES
1 – TERMINALS ARE PLATED FOR SOLDERING
2 – MAXIMUM MECHANICAL DEAD BREAK OF .0025 CAN BE EXPECTED WITH THIS SWITCH CONSTRUCTION

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL — DO NOT SCALE PRINT
OPERATING FORCE — — — 125–225 GRAMS	CONTACT ARRANGEMENT S P D T	**UNLESS OTHERWISE SPECIFIED TOLERANCES ARE**
RELEASE FORCE — — — — 30 GRAMS MIN		ONE PLACE (.0) ±.030
DIFFERENTIAL TRAVEL — — — .010 MAX		TWO PLACE (.00) ±.015
OVERTRAVEL — — — — — — .050 MIN	25A, 277 VAC 1HP, 125 VAC 2HP, 250 VAC	THREE PLACE (.000) ±.005
FREE POSITION — — — — .625 MAX		ANGLES ±
RELEASE TRAVEL — — — — — .010 MIN		WEIGHT .015 LB

REPLACES X102480–V3
RELEASE NO. PR–23071
CATALOG LISTING V3–2900 PAGE 1 OF 1
ISSUE 1
CHECK
REVISIONS
CHECK
22 OCT 97 DCS
CHECK
15 JUL 97 DCS
DRAWN
DDM/CAD

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Honeywell:
V3-2900