

PIN DETAIL
TYP. ALL PORTS

50 MICRO-INCHES [1.27um]

SS73100-047F

CONTACT PLATING
IN MATING AREA

PART NUMBER



DO NOT SCALE DRAWING

DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE ±.005 [0.13]
ANGLES ARE ± 1°

SHEET NO. 1 OF 2



11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512

<http://www.stewartconnector.com>

TITLE: HIGH PERFORMANCE SHIELDED STACK JACK, 16 PORTS (8 ON 8)
EIGHT CONTACT, EIGHT POSITION


THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: TJA DATE 9-18-08

APPD BY: TRM DATE 9-19-08


DWG NO. CT730115F REV. A6

DATE	REV	ECN	APP'D. BY
2-26-16	A5	10568	TRM
11-11-16	A6	10821	TRM

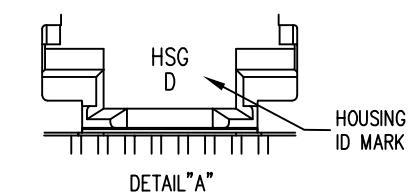

NOTES:

1. CONNECTOR MATERIALS:
HOUSING: THERMOPLASTIC UL94 V-0
CONTACTS/SHIELD: COPPER ALLOY
SHIELD PLATING: NICKEL
CONTACT PLATING: SELECTIVE GOLD IN CONTACT AREA
SEE CHART FOR PART NUMBER
2. FOR PRODUCT SPECIFICATIONS SEE PR022-01.
3. PART IS WAVE SOLDER COMPATIBLE ONLY
4. RATED AT MAX. 260°C FOR MAX. 10 SECS.
5. DIMENSIONS AND TOLERANCES COMPLY WITH FCC/CFR 47, PART 68.
6. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE
USER THE ABILITY TO HAVE REASONABLE JACK/PANEL
CLEARANCES, YET MAINTAIN GROUNDING CAPABILITY.
THESE VARIABLES CAN BE ADJUSTED IN EITHER DIRECTION
BUT MAY CARRY SOME CONSEQUENCES IN THE FORM OF
LOWER MATING FORCES OR TIGHTER ASSEMBLY TOLERANCES.
7. DESIGNED FOR CATEGORY 5/5e APPLICATIONS.

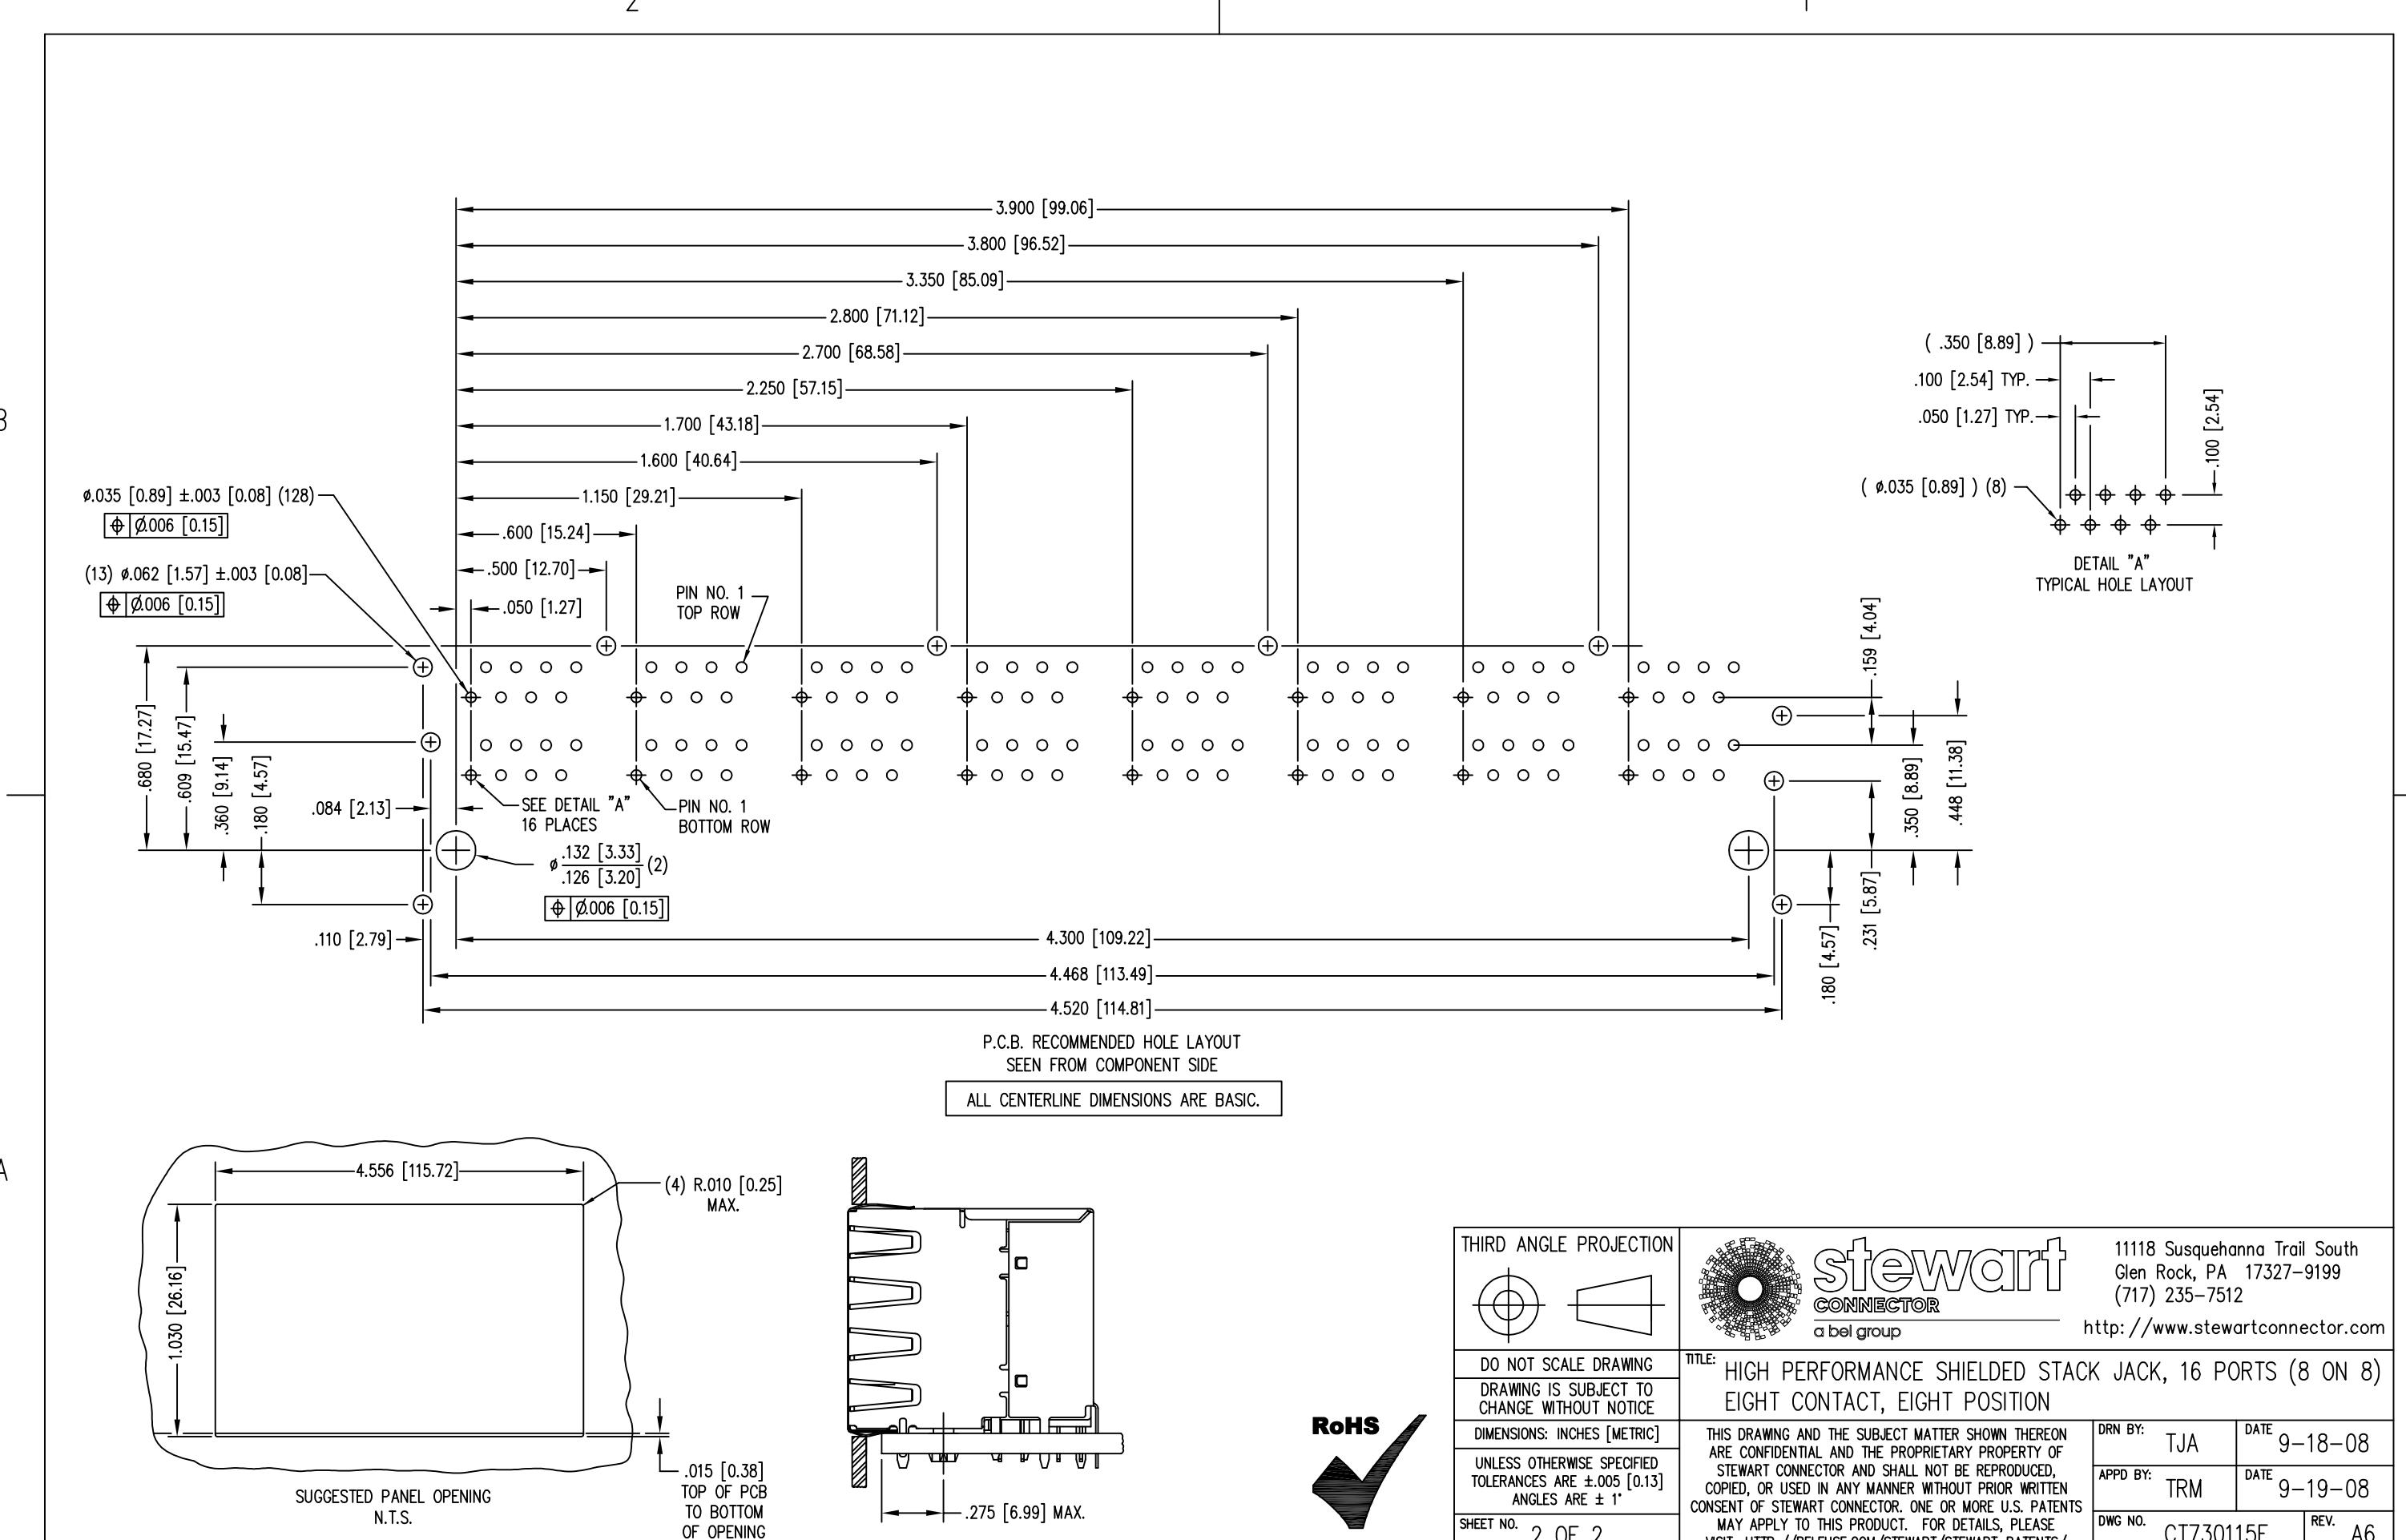

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

[SS73100-047F](#)