



UNCONTROLLED DOCUMENT

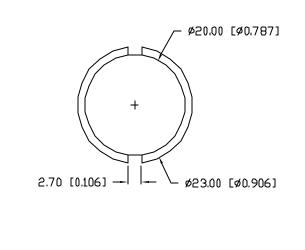



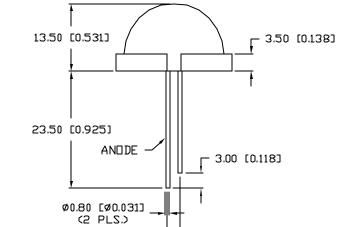

- 2.54 [0.100]



PART NUMBER				
SSL-LX20R6YD				
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE		
А	UPDATED SPECS.	7.14.95		
В	E.C.N. #108RDR. & REDRAWN IN 3D.	6.6.01		

electro-optical characteristics ta=25°C If=20mA					
PARAMETER	MIN	TYP	MAX	UNITS	test cond
PEAK WAVELENGTH		585		nm	
FORWARD VOLTAGE		6.3	7.8	Vf	
REVERSE VOLTAGE	5.0			Vr	lr=100μΑ
axial intensity		23		med	lf=20mA
VIEWING ANGLE		120		2x theta	
Emitted Color:	YELLOW				
EPOXY LENS FINISH:	YELLOW	DIFFUSED			

A LIMITS OF SAFE OPERATION AT 25°C PER DIE

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	тW
DERATE FROM 25°C	- 1.2	mW/"C
OPERATING, STORAGE TEMP.	- 40 TO + 85	' C
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX
* t<10هرS		

UNCONTROLLED DOCUMENT *UNLESS DTHERWISE SPECIFIED TOLERANDES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), XXX=±0.25 (±0.010), XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MN = +DECIMAL PRECISION -0.00							
REV.	PART NUMBER	<u>Confidential Information</u> The Information Contaned in This document is the property of	i sale		E. HELEN ROA ATINE, IL 600		▣
В	SSL-LX20R6YD	LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUNEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE DR IN PART FRUM DESCLISITER AND DESEMINATION TO ALL THEOP PARTIES.	Ma Toute Phonesic To Wa	For Your PHC	WEB: www.lume WEB: www.lume	9.2790 ex.com	
	22mm DIAMETER, 6 CHIP JUMBO LED LAMP, 585nm YELLOW LED, YELLOW DIFFUSED LENS.	Relability note Our nany years of experience data accumulation indicate that solder heat is a major cause of early and future failure. Please pay attention to your soldering process.	DRAWN BY:	CHECKED BY:		DATE: 5. PAGE: 1	13.94 OF 1 N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSL-LX20R6YD