

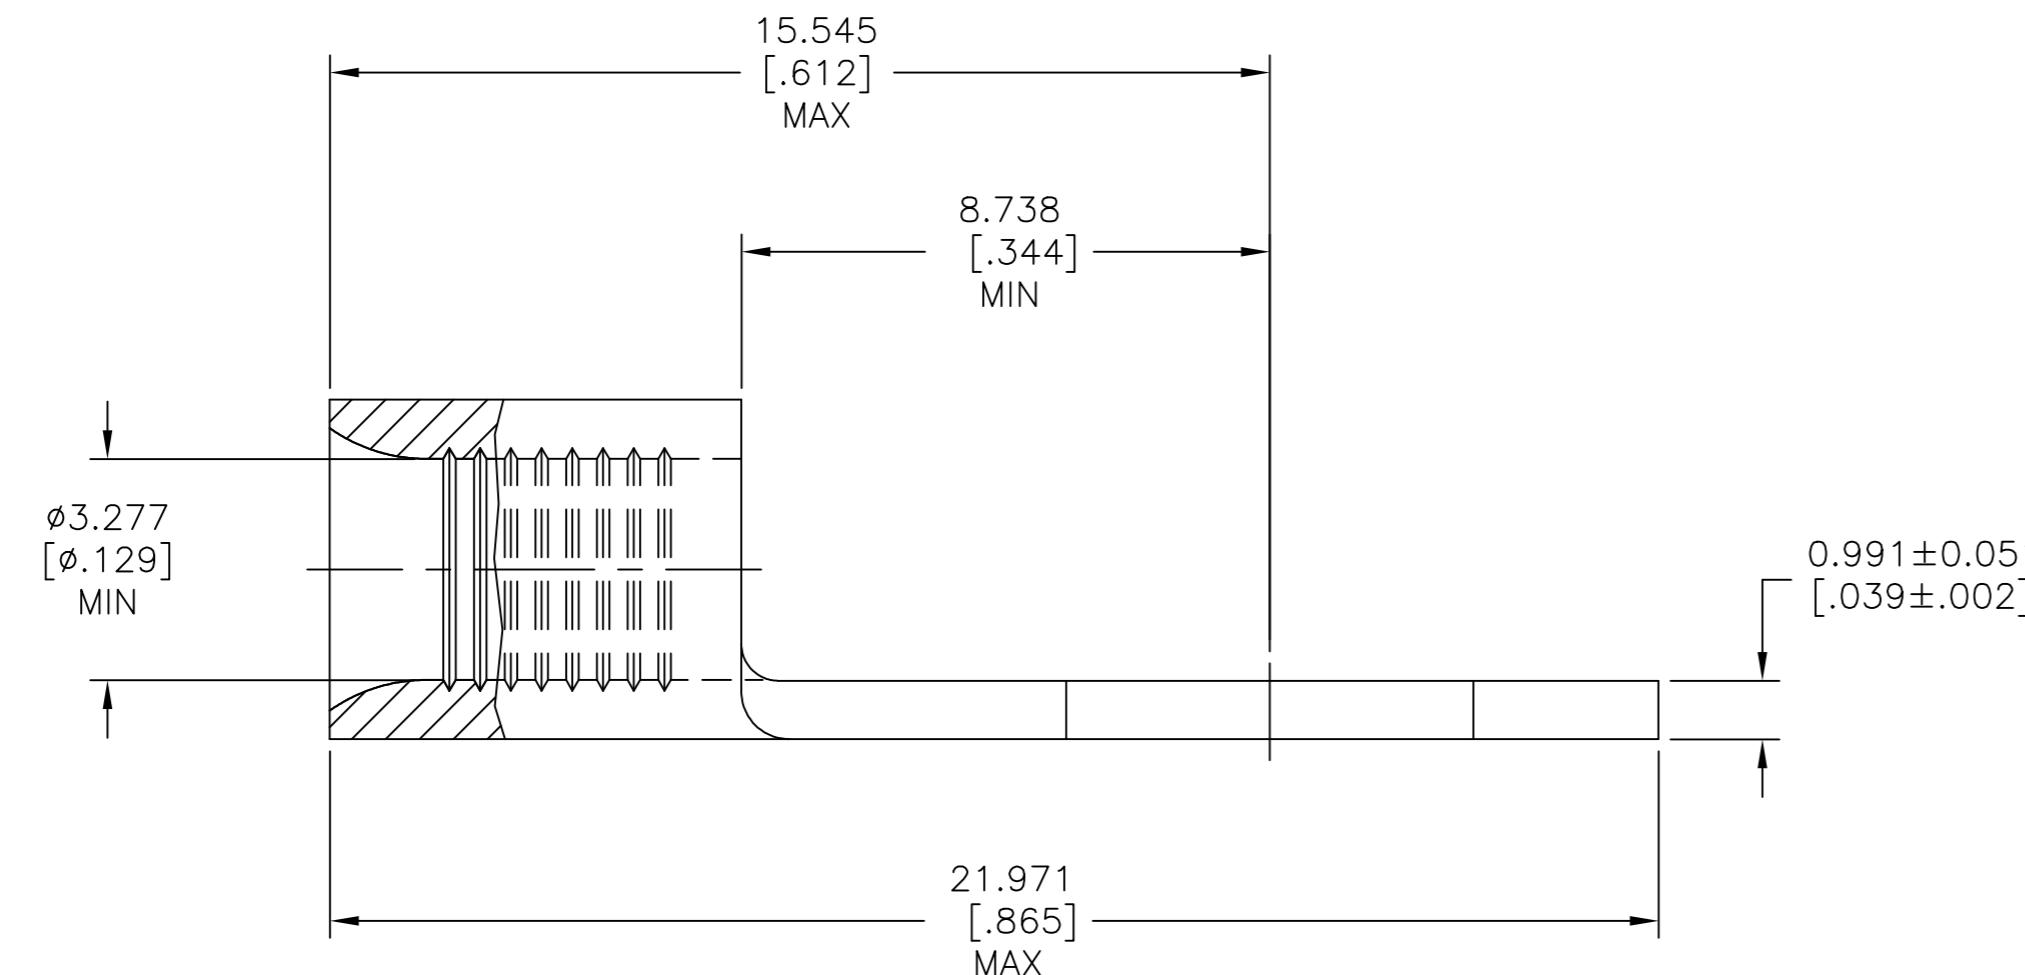
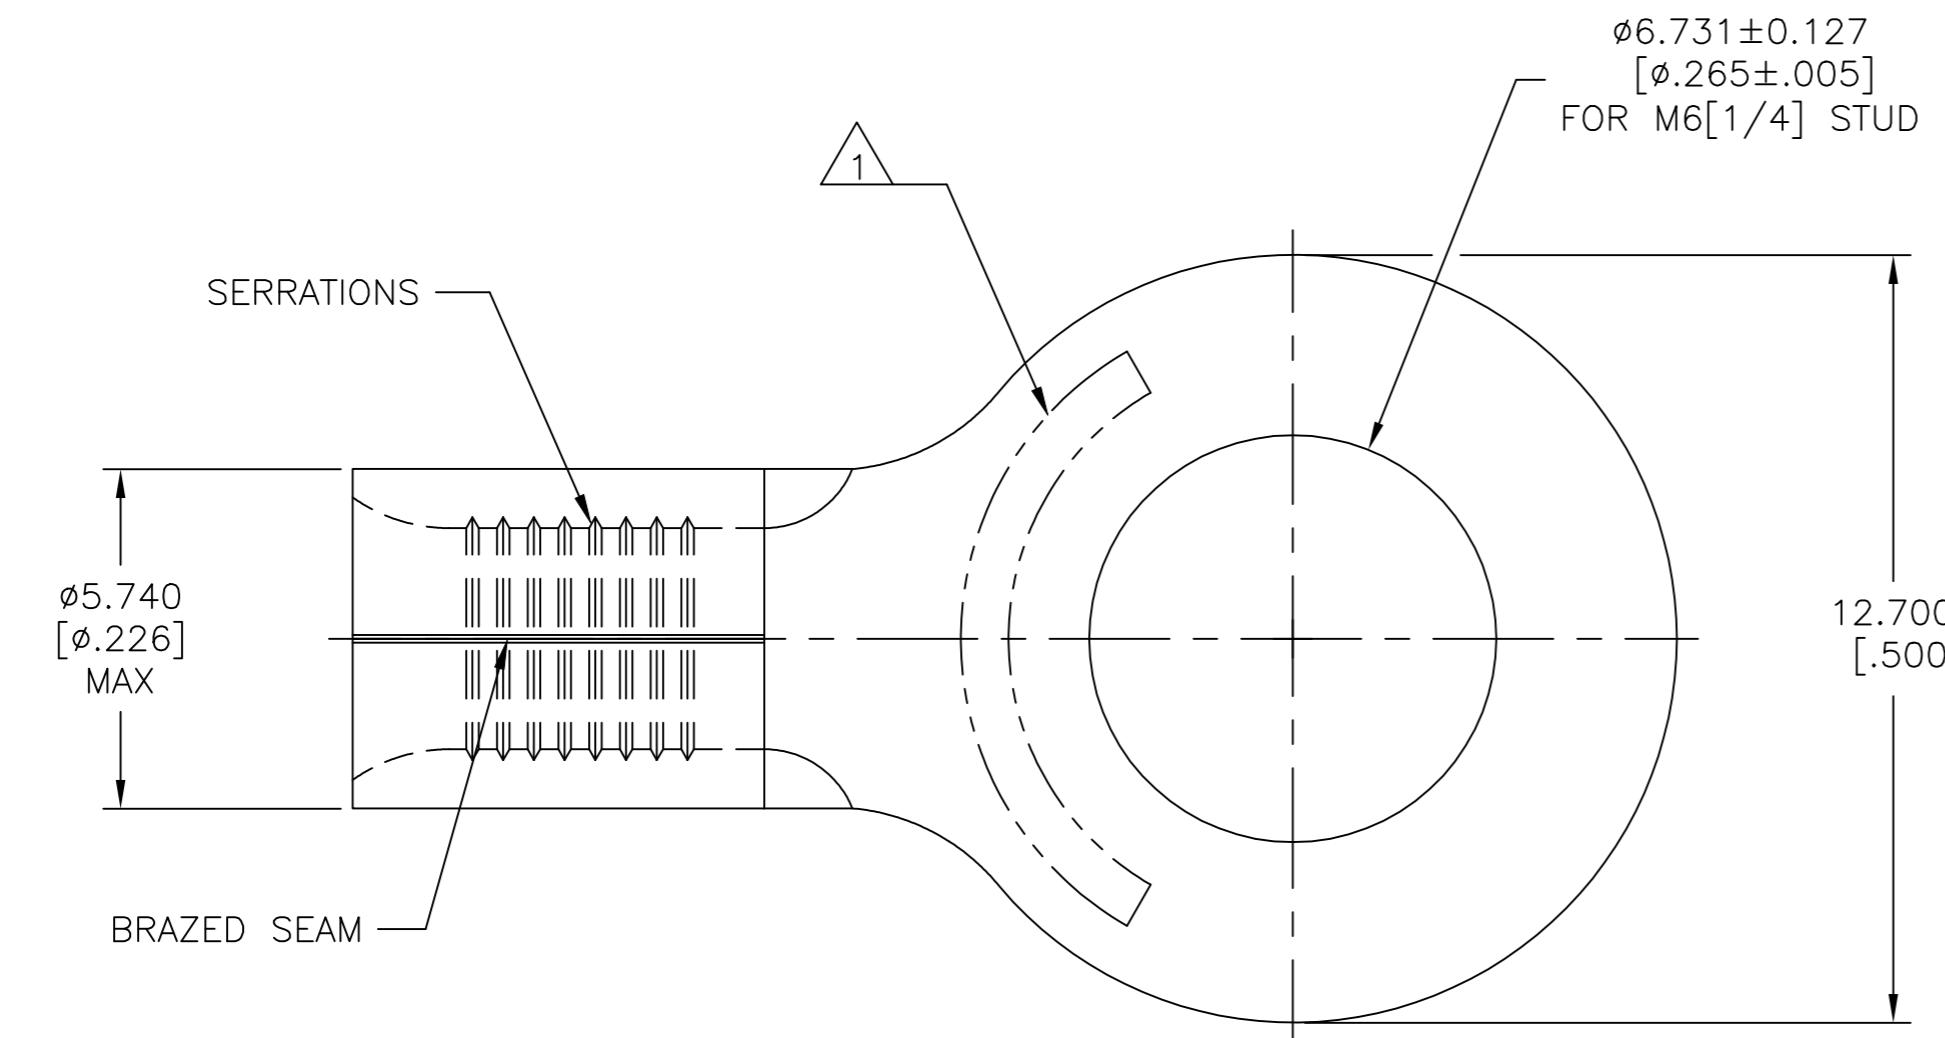
THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT - By -

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	E3	REVISED PER ECO-11-005027	11MAR11	RK	HMR
	E4	REVISED PER ECO-17-008808	05MAR2018	RS	DR

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMSFOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTSPRODUCT INFORMATION CENTER
1-800-522-6752FOR APPLICATION
TOOLING INFORMATIONTOOLING ASSISTANCE CENTER
1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

MAX RECOMMENDED OPERATING
TEMPERATURE:
170°C[338°F]VOLTAGE RATING:
N/ACIRCULAR MIL AREA:
2.62-6.64mm²[5,180-13,100]
SOLID OR STRANDEDTHIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT

DWN 3-17-93
TA BRINKMAN
CHK 3-17-93
DA PATTERSON

NAME

TE Connectivity Ltd.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

NAME

TERMINAL, RING
TONGUE, SOLISTRAND

12-10 AWG

APVD 3-17-93
JL MECKEY
PRODUCT SPEC

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2 00779 C=35772

—

UL 486 A-B

—

CUSTOMER DRAWING

SCALE 8:1

SHEET 1 OF 1

REV E4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-35772-1](#) [8-35772-2](#) [35772-1](#)