


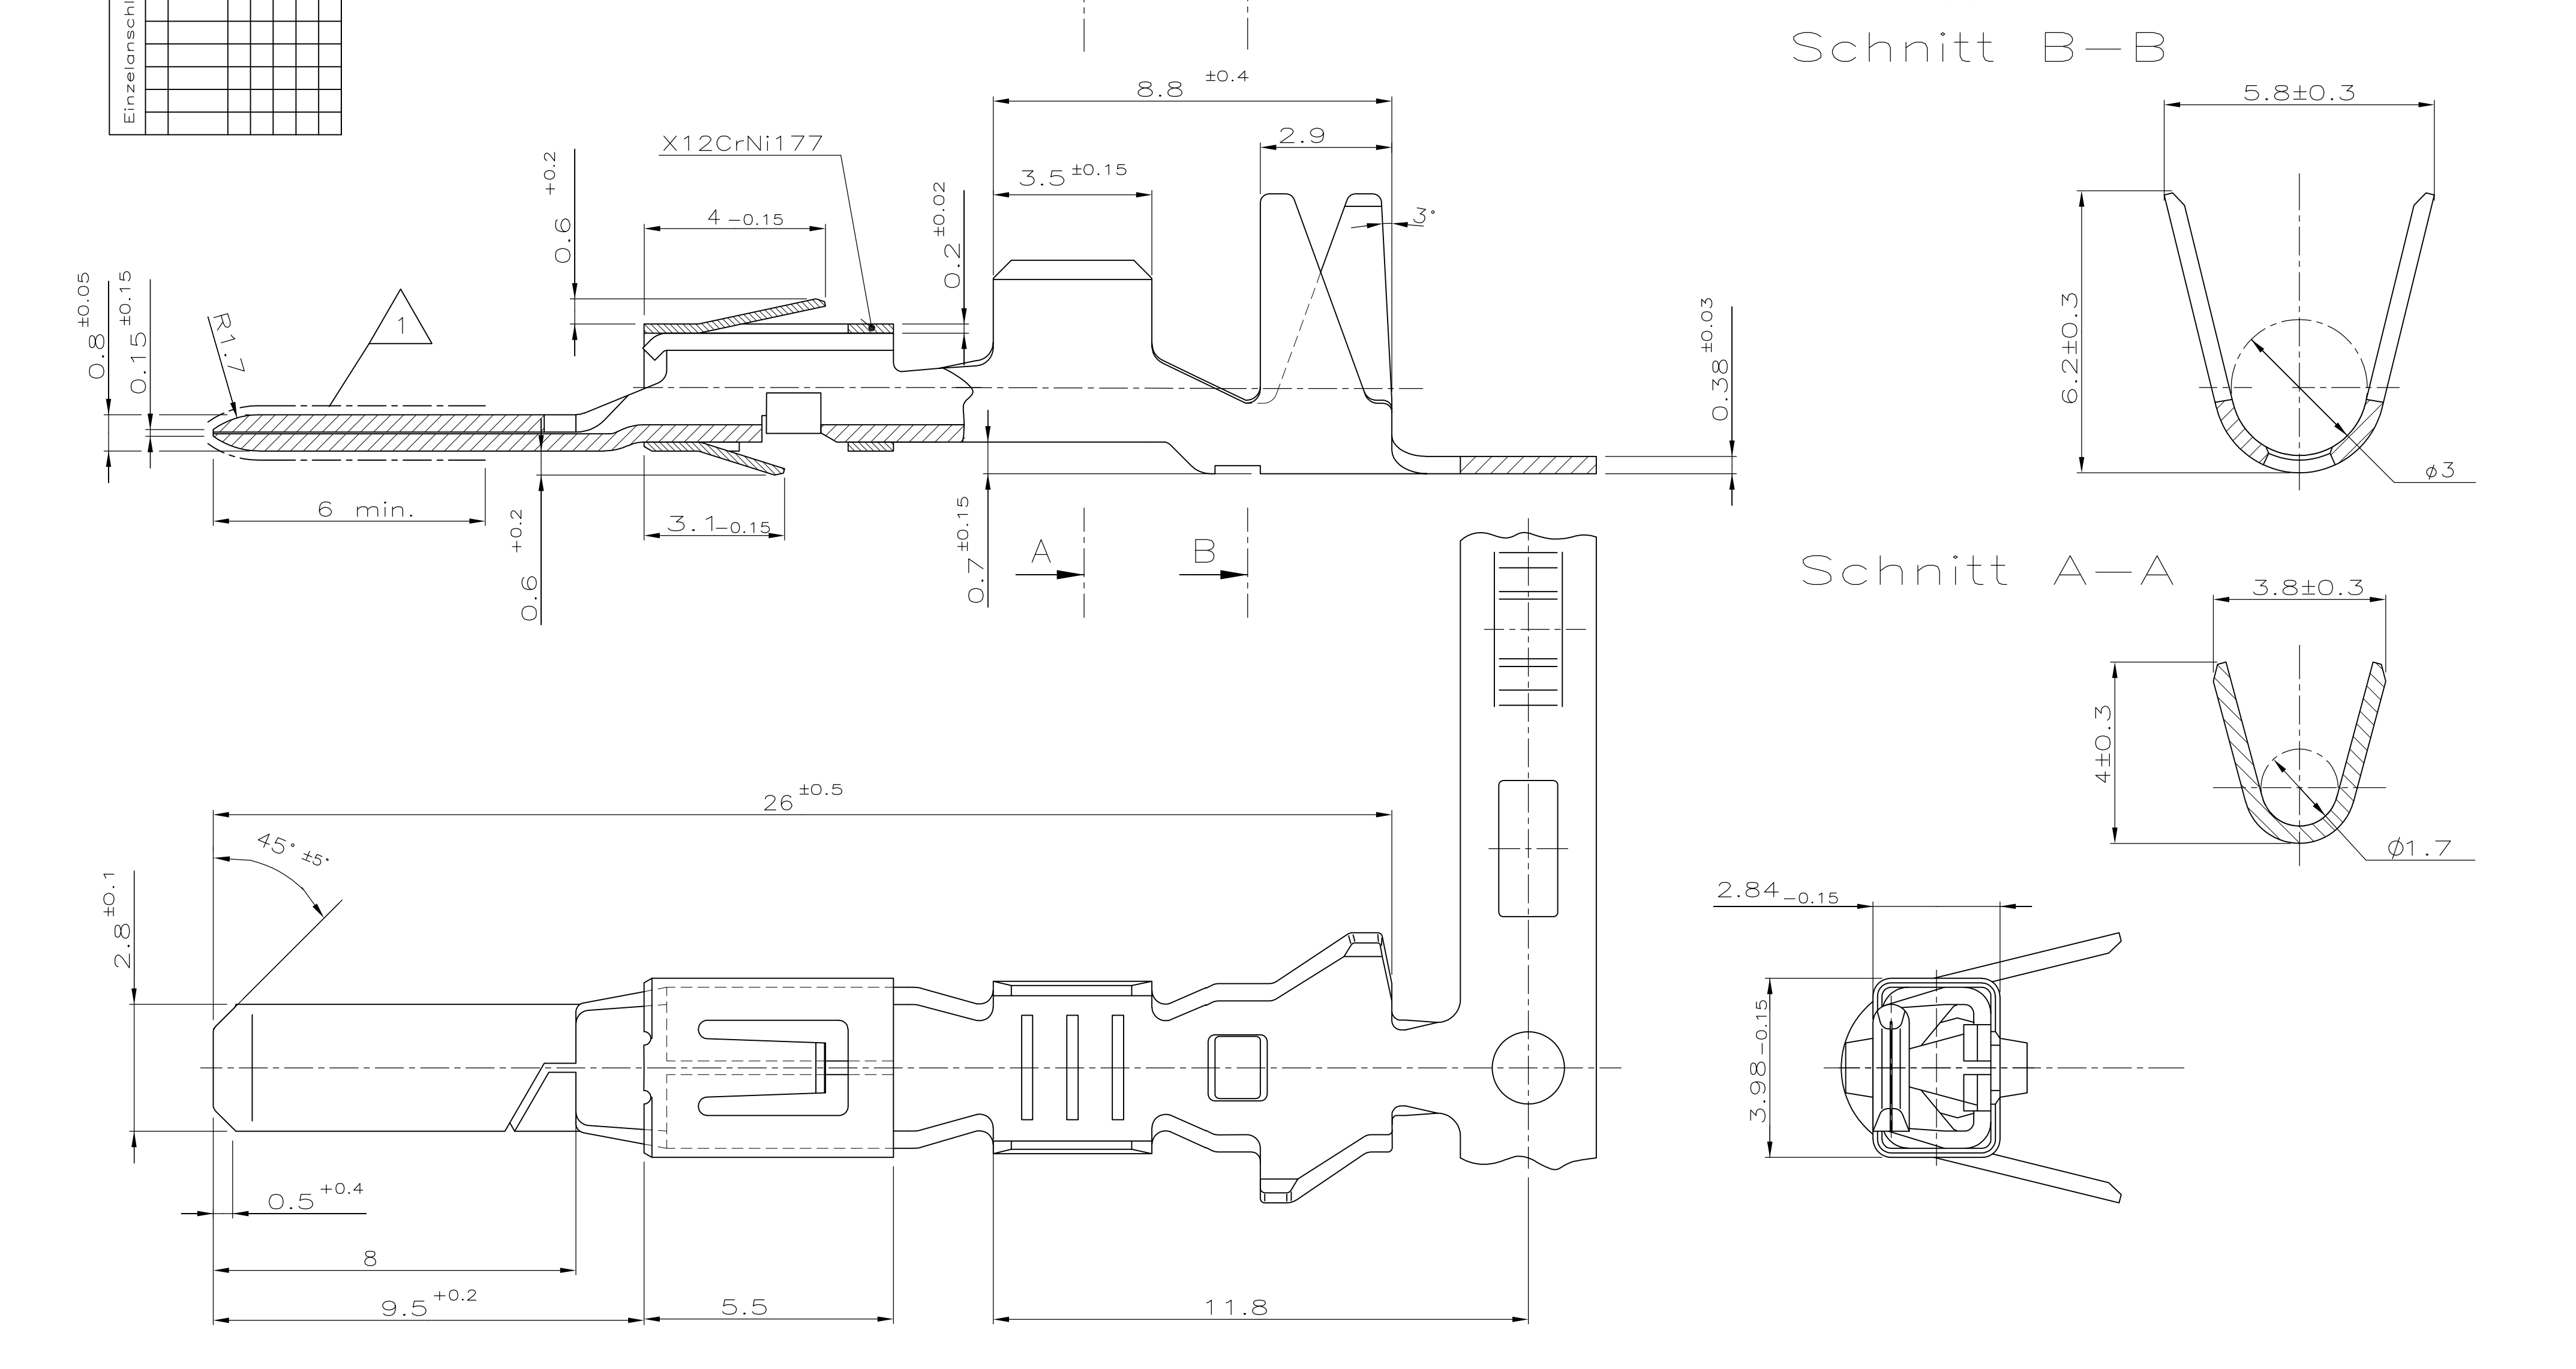

1

Kontaktzone selectiv vergoldet

0.8 µm min. über Ni

2

Crimpbereich vorverzinnt

1 µm min. über Ni

Drahtgrößenbereich:

1.5–2.5mm²

Dichtungs Ø:

3.4mm Einzeldichtungssystem

OBSELETE	-963812-3	962881-3	H	CuSn4	sel. Gold	1 Sn 2	
OBSELETE	-963812-2	962881-2	H	CuFe2		vorverzinnt	
OBSELETE	-963812-1	962881-1	H	CuSn4		vorverzinnt	
	TE BESTELL-NR. EINZELAUSFÜHRUNG	TE BESTELL-NR. BANDWARE	Rev.	WERKSTOFF	OBERFLÄCHE FARBE		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

±0.2 mm

0 PLC ± -

1 PLC ± -

2 PLC ± -

3 PLC ± -

4 PLC ± -

ANGLES ± 2°

FINISH

-

DWN
H.Gehrke
10.01.92

CHK
L.Nix
22.01.92

APVD
-

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

2.8 mm Flachstecker
mit doppelter Rastfeder

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-962881

SCALE
10:1

SHEET
1 of 1

REV
H1

ZEICHNUNG GÜLTIG AB

RESTRICTED TO
-

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[962881-1](#)