


THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- - -

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

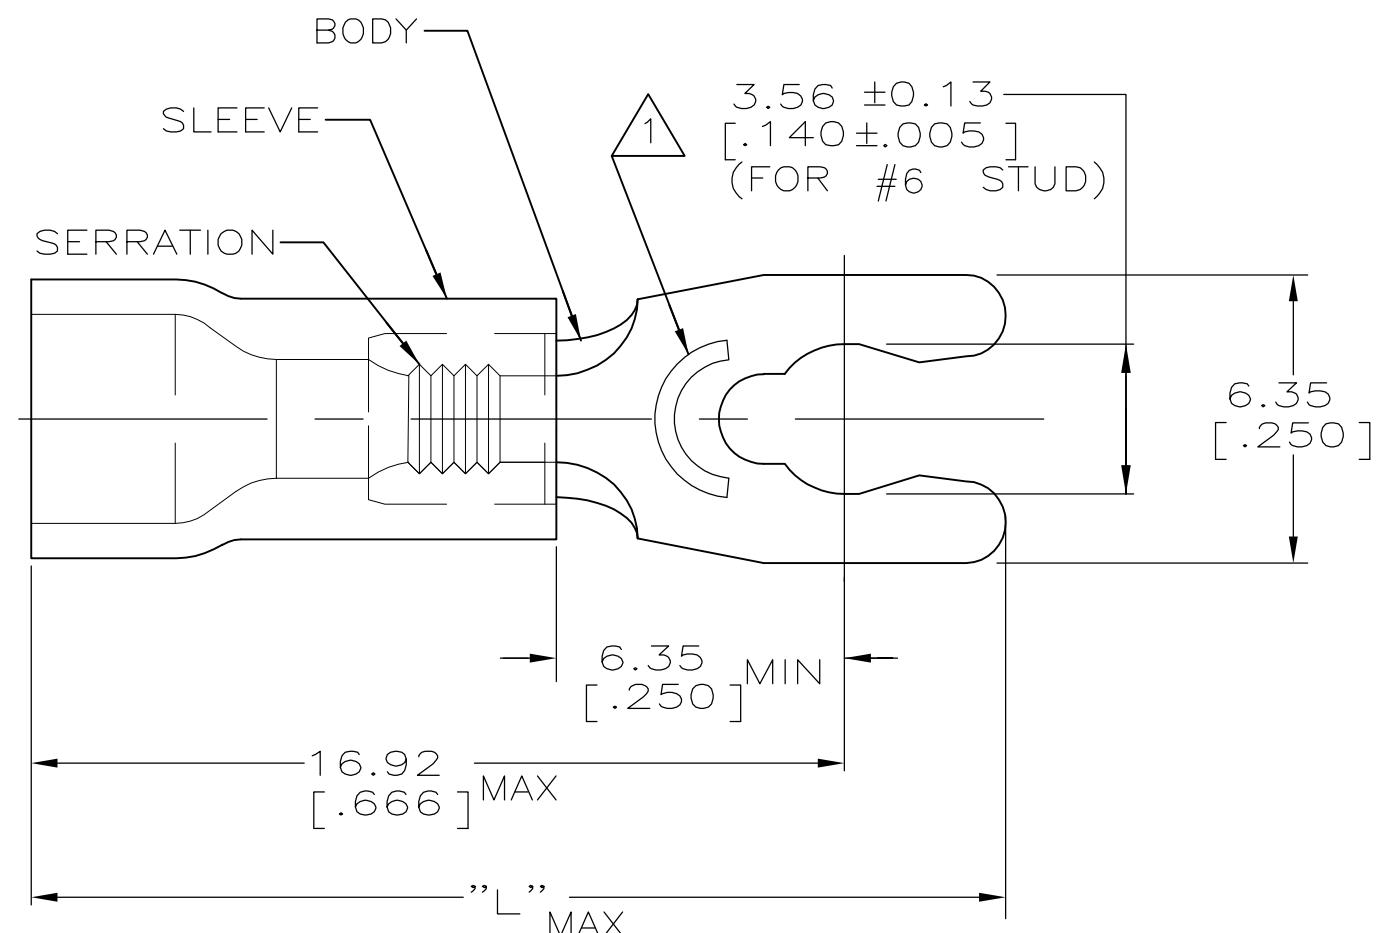

5 BODY, BRASS PER ASTM B-36
GOLD PLATE PER MIL-G-45204,
OVER BRIGHT NICKEL PER QQ-N-290

LOC	DIST	REVISIONS		
		P	LTR	DESCRIPTION
G	14	P1		REVISED PER ECO-11-004820

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

1 STAMP 6SAMP 16-14* APPROX AS SHOWN
2. SEE TABLE FOR WIRE INSUL DIA
3. TONGUE MATL THK, 0.79 ± 0.05 [0.031 ± 0.002]
4 BODY, BRASS PER ASTM B-36
TIN PLATE PER ASTM B545

4	20.60 [.811]	3.00-4.90 [.118-.193]	100	LOOSE PIECE, BOX	8-52955-1
5	21.84 [.860]	3.81-6.35 [.150-.250]	1000	LOOSE PIECE	52955-4
4	21.84 [.860]	3.81-6.35 [.150-.250]	2500	ON TAPE, REEL	52955-3
4	21.84 [.860]	3.81-6.35 [.150-.250]	1000	LOOSE PIECE	52955-2
4	20.60 [.811]	3.00-4.90 [.118-.193]	5000	ON TAPE, REEL	52955-1
4	20.60 [.811]	3.00-4.90 [.118-.193]	1000	LOOSE PIECE	52955
MATERIAL & FINISH	"L"	WIRE INSUL DIA	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L OLMEDA 26JUN95	TE Connectivity
		DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK M ELLIS 26JUN95	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± - ± - ± 0.20 [.008] ± - ± -	APVD G NGO PRODUCT SPEC UL 486A APPLICATION SPEC —	NAME TERMINAL, SPRING SPADE, SHORT, PLASTI-GRIP, WIRE SIZE: 16-14
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111	MATERIAL	FINISH	SIZE CAGE CODE DRAWING NO A300779 C-52955	RESTRICTED TO —
FOR ORDER ENTRY	1-800-526-5142	SEE TABLE	SEE TABLE	CUSTOMER DRAWING	SCALE 6:1 SHEET 1 OF 1 REV P1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[52955-2](#) [8-52955-1](#)