

THIS DRAWING IS UNPUBLISHED

RELEASED FOR PUBLICATION

—

© COPYRIGHT

By

ALL RIGHTS RESERVED

LOC

DIST	
------	--

AD

30

REVISIONS

P	
---	--

LIR

DESCRIPTION

DA

ГЛАВ

APV

R

9

—DAS


ED. 5

REF ECO 14 00006


26

14	
----	--

NIK	MM
-----	----

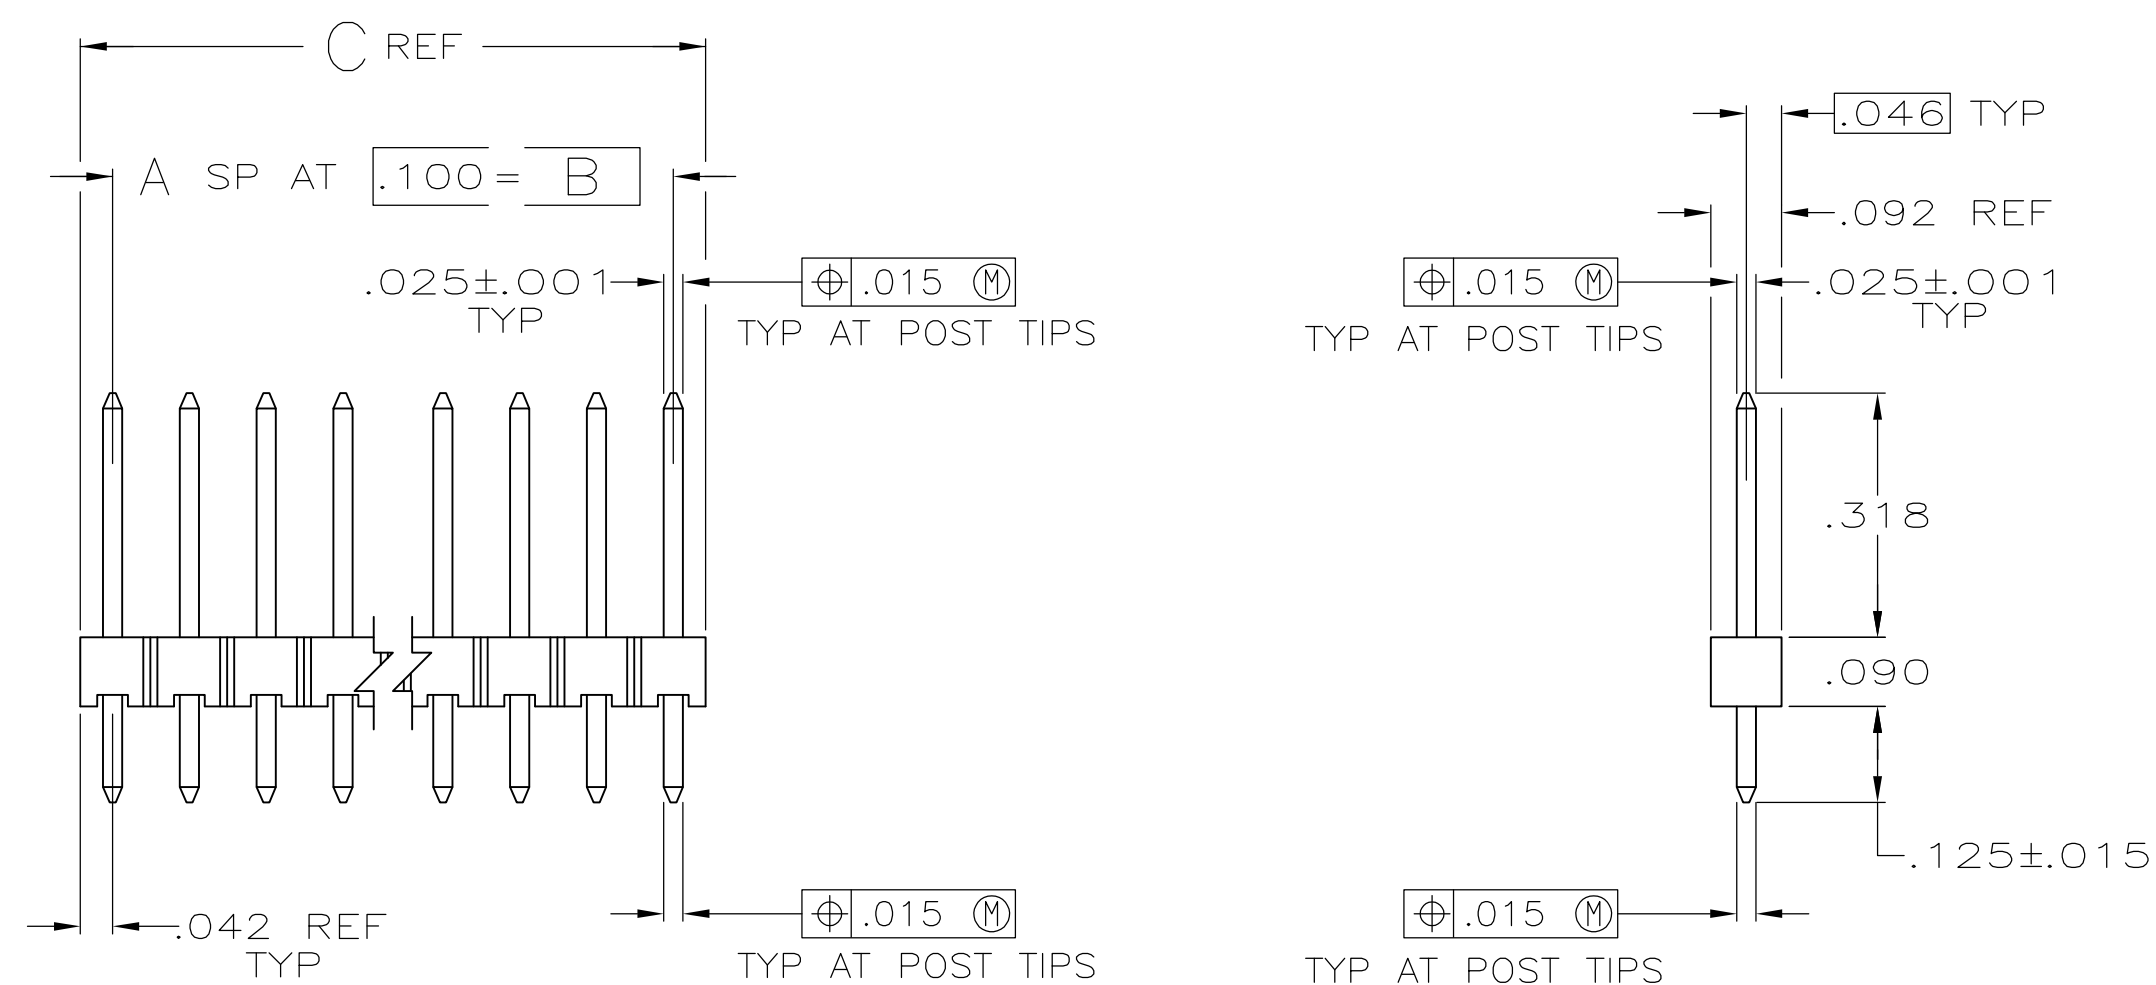

- | | |
|---|---|
| 1 | TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD |
| 2 | ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS |
| 3 | PACKAGE IN SINGLE TUBES |
| 4 | .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL. |
| 5 | .000100-.000200 BRIGHT TIN OVER .000050 NICKEL. |
| 6 | PRELIMINARY PART - NOT RELEASED FOR PRODUCTION. |
| 7 | HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK. |
| 8 | OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI |

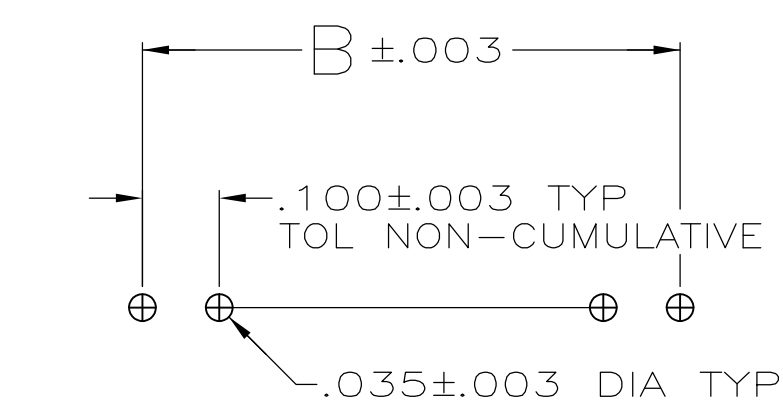

RECOMMENDED HOLE LAYOUT

		OBSOLETE	5		.484	.400	4	5	5-103321-3
			5	6	1.384	1.300	13	14	5-103321-2
			5	6	1.184	1.100	11	12	5-103321-1
			5	6	1.084	1.000	10	11	5-103321-0
			5	6	.884	.800	8	9	4-103321-9
			5		3.984	3.900	39	40	4-103321-8
			5		1.584	1.500	15	16	4-103321-7
			5		.784	.700	7	8	4-103321-6
			5		.284	.200	2	3	4-103321-5
			5		.184	.100	1	2	4-103321-4
			5	6	.084	—	—	1	4-103321-3
SUPERSEDED BY 1-103321-4				3	1.384	1.300	13	14	4-103321-2
SUPERSEDED BY 103321-3				3	.284	.200	2	3	4-103321-1
			4		3.984	3.900	39	40	4-103321-0
8	OBSOLETE		4		3.884	3.800	38	39	3-103321-9
8	OBSOLETE		4		3.784	3.700	37	38	3-103321-8
8	OBSOLETE		4		3.684	3.600	36	37	3-103321-7
			4		3.584	3.500	35	36	3-103321-6
8	OBSOLETE		4		3.484	3.400	34	35	3-103321-5
8	OBSOLETE		4		3.384	3.300	33	34	3-103321-4
8	OBSOLETE		4		3.284	3.200	32	33	3-103321-3
8	OBSOLETE		4		3.184	3.100	31	32	3-103321-2
8	OBSOLETE		4		3.084	3.000	30	31	3-103321-1
8	OBSOLETE		4		2.984	2.900	29	30	3-103321-0
8	OBSOLETE		4		2.884	2.800	28	29	2-103321-9
8	OBSOLETE		4		2.784	2.700	27	28	2-103321-8
8	OBSOLETE		4		2.684	2.600	26	27	2-103321-7
8	OBSOLETE		4		2.584	2.500	25	26	2-103321-6
			4		2.484	2.400	24	25	2-103321-5
8	OBSOLETE		4		2.384	2.300	23	24	2-103321-4
8	OBSOLETE		4		2.284	2.200	22	23	2-103321-3
8	OBSOLETE		4		2.184	2.100	21	22	2-103321-2
8	OBSOLETE		4		2.084	2.000	20	21	2-103321-1
8	SUPERSEDED BY 7-146274-0		4		1.984	1.900	19	20	2-103321-0
8	OBSOLETE		4		1.884	1.800	18	19	1-103321-9
8	OBSOLETE		4		1.784	1.700	17	18	1-103321-8
8	OBSOLETE		4		1.684	1.600	16	17	1-103321-7
			4		1.584	1.500	15	16	1-103321-6
8	OBSOLETE		4		1.484	1.400	14	15	1-103321-5
			4		1.384	1.300	13	14	1-103321-4
8	OBSOLETE		4		1.284	1.200	12	13	1-103321-3
8	OBSOLETE		4		1.184	1.100	11	12	1-103321-2
8	OBSOLETE		4		1.084	1.000	10	11	1-103321-1
			4		.984	.900	9	10	1-103321-0
			4		.884	.800	8	9	103321-9
			4		.784	.700	7	8	103321-8
			4		.684	.600	6	7	103321-7
			4		.584	.500	5	6	103321-6
			4		.484	.400	4	5	103321-5
			4		.384	.300	3	4	103321-4
			4		.284	.200	2	3	103321-3
			4		.184	.100	1	2	103321-2
			4		.084	—	—	1	103321-1
		PLATING		REMARKS	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.						DWG J.MARTINELLI	150C192				
						GR JOHN KNITILE	23NOV92	 TE Connectivity			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:				APPROVED BY B. FLINCHBAUGH	23NOV92	NAME			
		0. PLC ± .005				PRODUCT SPEC		ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS			
		1. PLC ± .005				APPLICATION SPEC					
		2. PLC ± .005									
		3. PLC ± .005									
MATERIAL POST: COPPER ALLOY		FINISH				WEIGHT		SIZE	CAGE CODE	DRAWING NO	RESTRICTED
SEE TABLE						—		A1	00779	C=103321	
						CUSTOMER DRAWING		SCALE		SHEET	REV
								4:1		1 of 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1-103321-6](#)