





ASSEMBLED VIEW

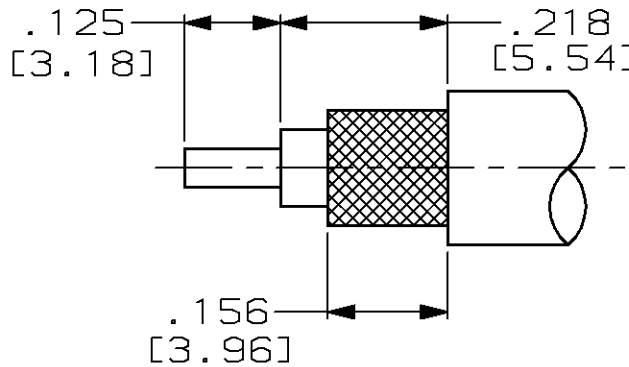

RECOMMENDED STRIP LENGTH
SCALE: NTS

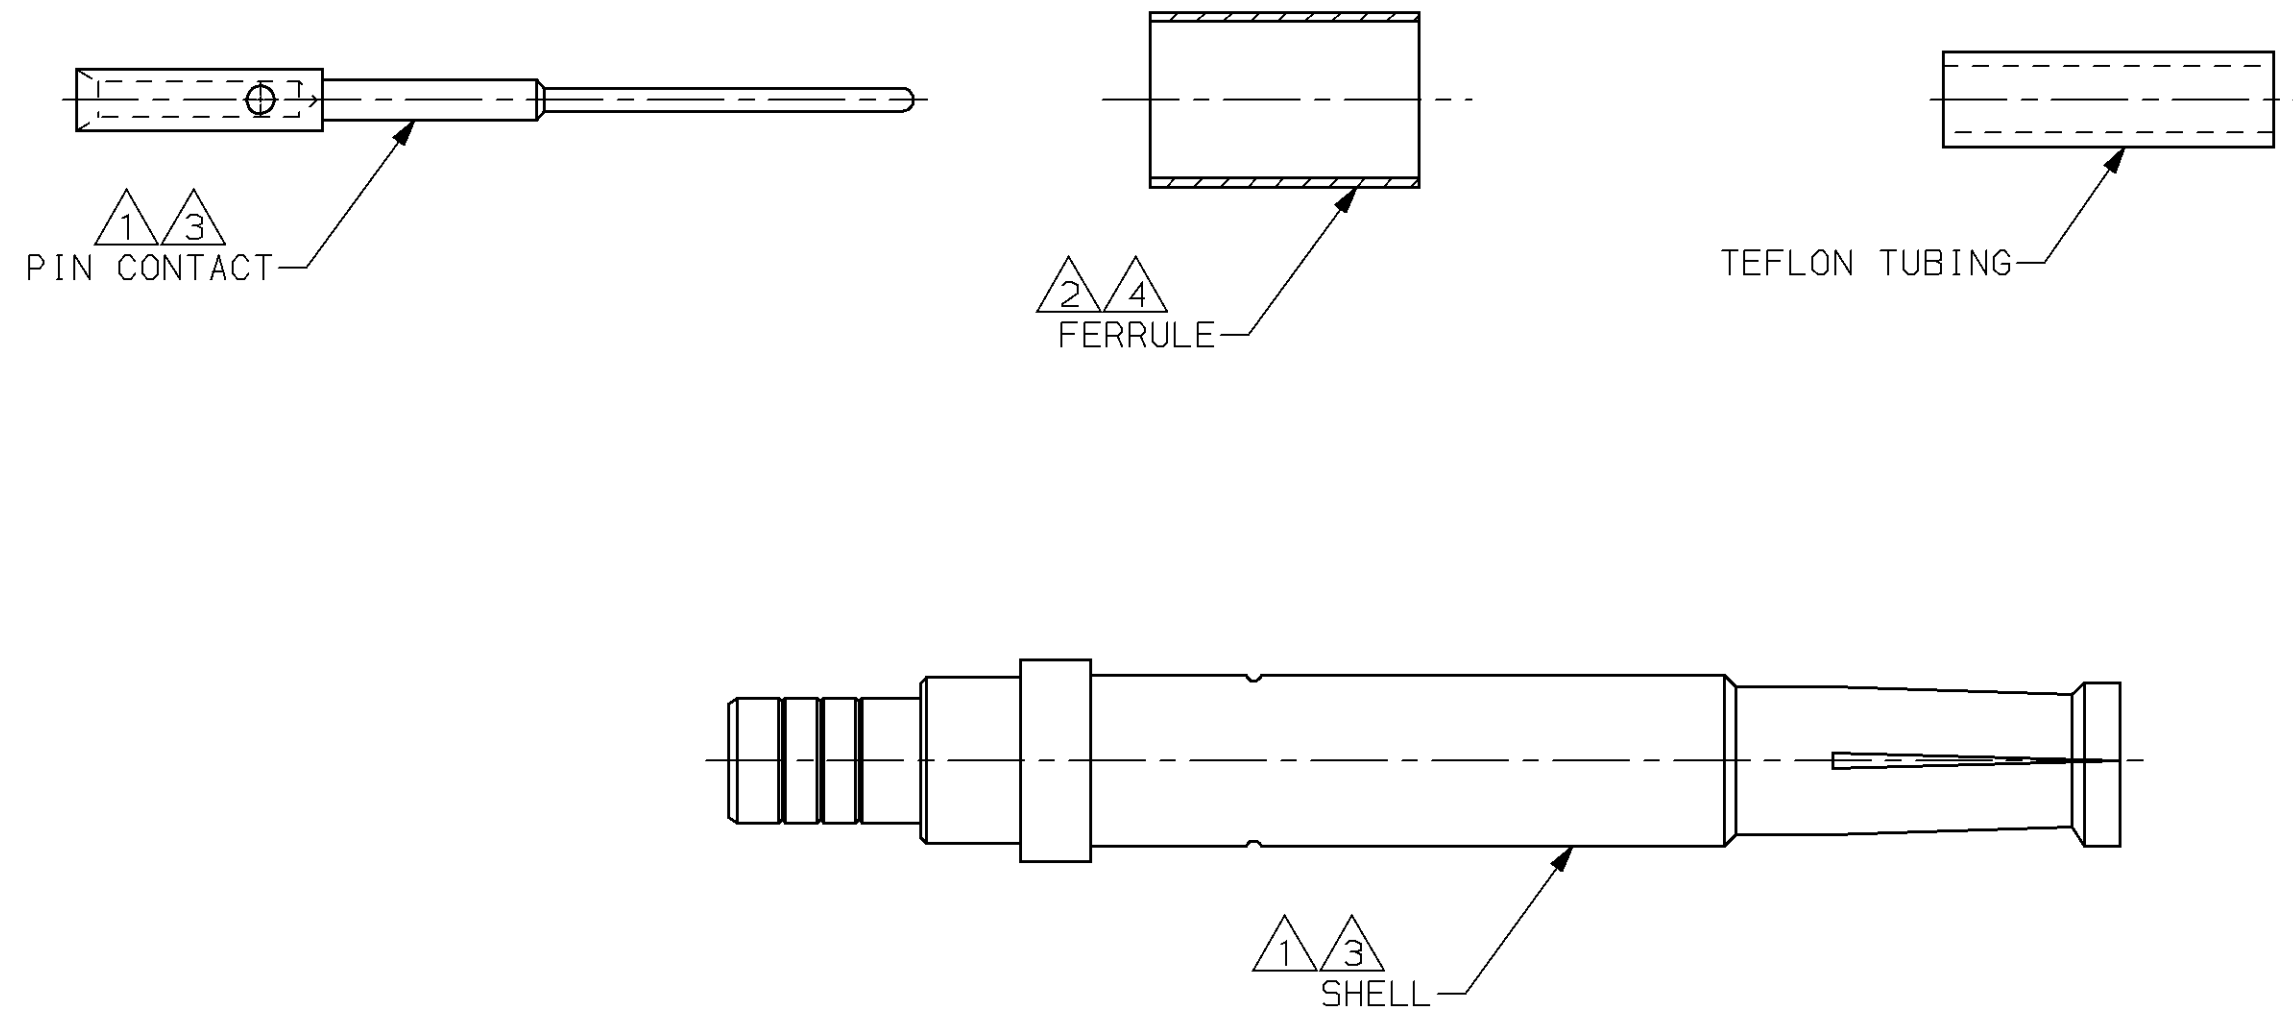

- 1 MAT'L: BERYLLIUM COPPER PER ASTM-B-196
- 2 MAT'L: COPPER PER ASTM-B-152
- 3 FINISH: GOLD PER MIL-G-45204 OVER NICKEL PER QQ-N-290.
- 4 FINISH: TIN-LEAD PLATE
- 5. FOR USE WITH RG-178/U AND 196/U CABLE.
- 6. FOR ASSEMBLY AND CRIMPING INSTRUCTIONS SEE I.S. 2348-4.

226781-3
PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES [mm]	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±.015 [0.38] 4 PLC ±- ANGLES ±- FINISH -	DWN C.C.THOMAS 3-4-97	CHK J.WEAVER 3-4-97	APVD J.WEAVER 3-4-97	NAME
		PRODUCT SPEC			
		APPLICATION SPEC			
MATERIAL -		WEIGHT -		SIZE A2	
		CUSTOMER DRAWING		CAGE CODE 00779	

AMP

AMP Incorporated
Harrisburg, PA 17105-3608

CONNECTOR, COAXIAL, RF
ARINC, SIZE 15, SOCKET

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=226781-3	-
SCALE 8:1		SHEET 1 OF 1	REV B

226781-3

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[226781-3](#)