


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	2	CPD CHANGE ECR-16-010502	14DEC2016	AFK	LS


COMMERCIALLY CONFIDENTIAL
RESTRICTED CIRCULATION

DIRECTION OF FEED
INTO PRINTER

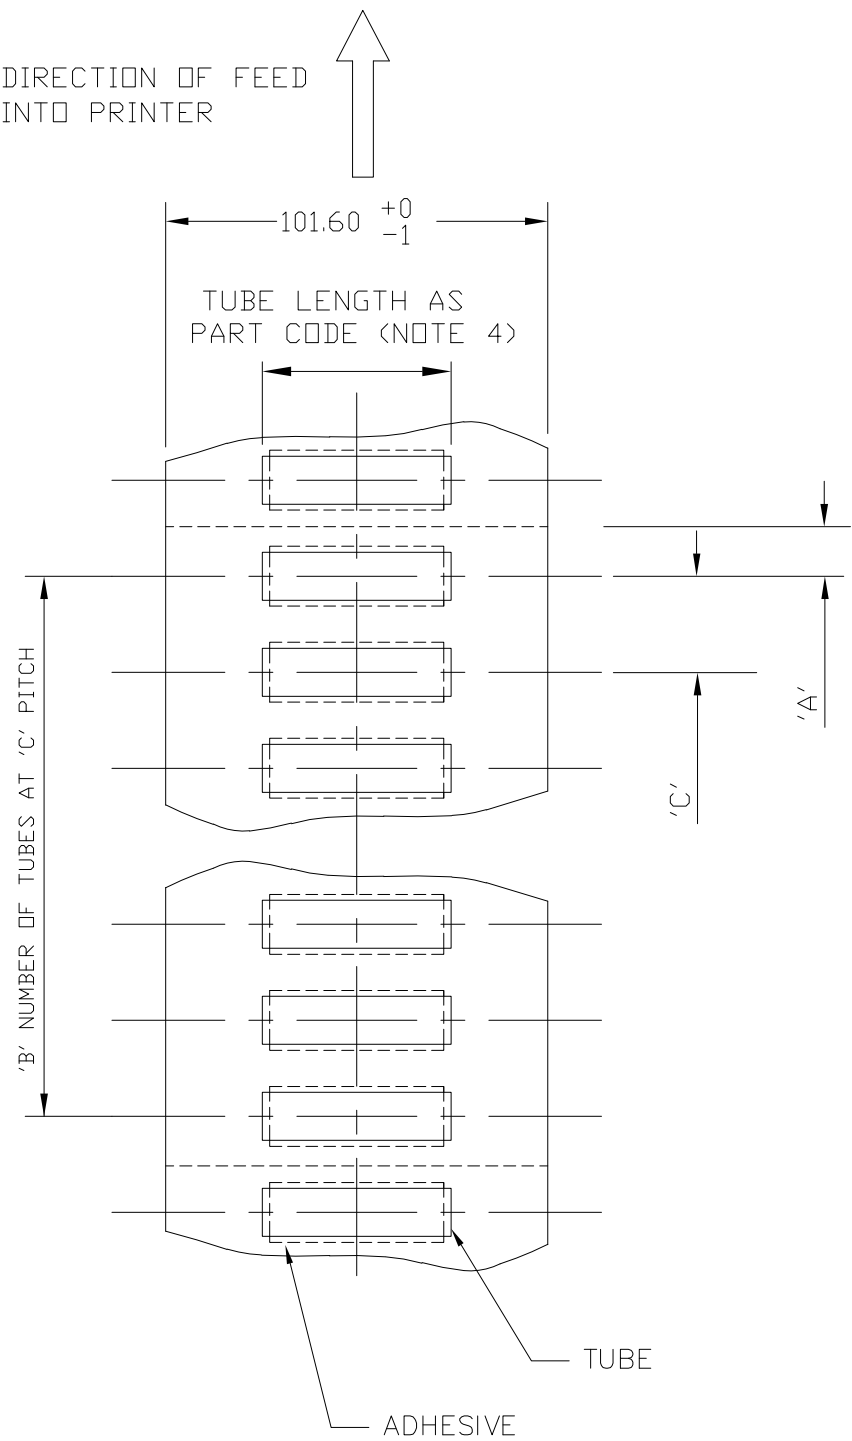

PART CODE (1st FIVE DIGITS)	'A' TOP EDGE OF PAPER TO CENTRE OF TUBE	'B' No. OF TUBES AT 'C' PITCH PER PAGE	'C' TUBE POSITION PITCH
HS024	4.23	30	8.47
HS032	6.40	20	12.7
HS048	6.40	20	12.7
HS064	8.46	15	16.93
HS095	12.7	10	25.4
HS127	12.7	10	25.4
HS190	25.4	5	50.8
HS254	25.4	5	50.8
HS381	63.5	2	127

- NOTES:-
- 1. TOLERANCE ON 'C' - ALL SIZES ±0.5mm.
 - 2. EDGES OF TUBE TO BE STRAIGHT/SQUARE TO PAPER
EDGE WITHIN 1.0mm TOLERANCE ZONE. SEE DIAGRAM BELOW.
 - 3. NO ACCUMULATIVE PITCH ERROR THROUGH PACK IS
ACCEPTABLE.
 - 4. TUBE LENGTH CUT TOLERANCE:- $\pm 1_0^1$ mm.

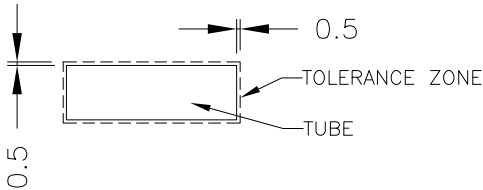

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN AFK	27NOV2012	TE Connectivity		
		CHK —	—			
DIMENSIONS: mm		APVD —	—	NAME HSI THERMAL TRANSFER NARROW ASSEMBLY 2:1 PRE TAPED CARRIER		
		PRODUCT SPEC —	—			
		APPLICATION SPEC —	—	SIZE	CAGE CODE	DRAWING NO
		WEIGHT 0.000000	A3	0198G	C=	1905A0019
MATERIAL IRRADIATED POLYOLEFIN TUBE		FINISH —	CUSTOMER DRAWING			RESTRICTED TO —
		SCALE — — —	SHEET 1 OF 1		REV 2	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[HS048WE1TS050S](#)