



AUDIO JACKS: STX-35398 Series

Mid-Mount 3.5mm Audio Jack

Product Features

Offered in a 3-Pole Version with Switch
Used in Devices Such as Audio Equipment, Cell Phones,
or Digital Still Camera
Complies with EIA Standards
CSA/NRTL Certified File No. LR78160

Performance Specifications

Materials and Finish

Housing

High Temperature Thermoplastic, UL 94V-0 Rated

Terminals

Copper Alloy, Gold Plated

Electrical Characteristics

Contact Resistance

Before Durability Test

50 milliohms Max.

After Durability Test

100 milliohms Max.

Insulation Resistance

100 Megohms Min. at 500V DC

Dielectric Withstanding Voltage

500V AC RMS for 1 Minute

Operating Temperature

-25°C to + 85°C

2D Drawing

IGES

STEP

3D PDF

Solder Profile

CofC RoHS Compliant

CofC REACH Compliant

UL Plastic File

Certificate of Origin

Check Stock

Request a Sample

Send Us An Email

Generated Part Number

Part Number Builder

		-			
Series	Option		Number of Pins	Threading Option	Packaging

Series

STX-35398 - Mid-Mount 3.5mm Audio Jack

Option

A - Through Hole and SMT Contacts with Barrel

E - Through Hole Contacts without Barrel

Number of Pins

5 - Pins

Threading Option

N - Non-Threaded Barrel


Packaging

TR - Tape and Reel


Contact Kycon for other options

STX-35398

Dimensions in mm

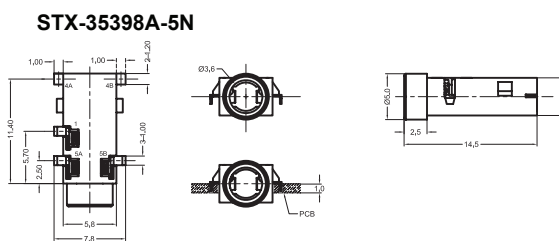

STX-35398E-5N

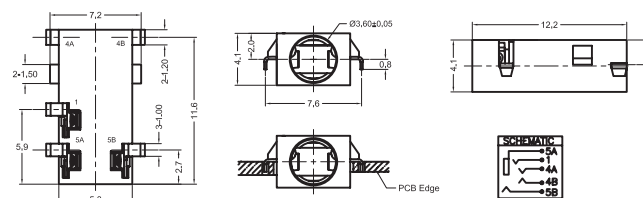

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Kycon:](#)

[STX-35398A-5N-TR](#) [STX-35398E-5N-TR](#)