
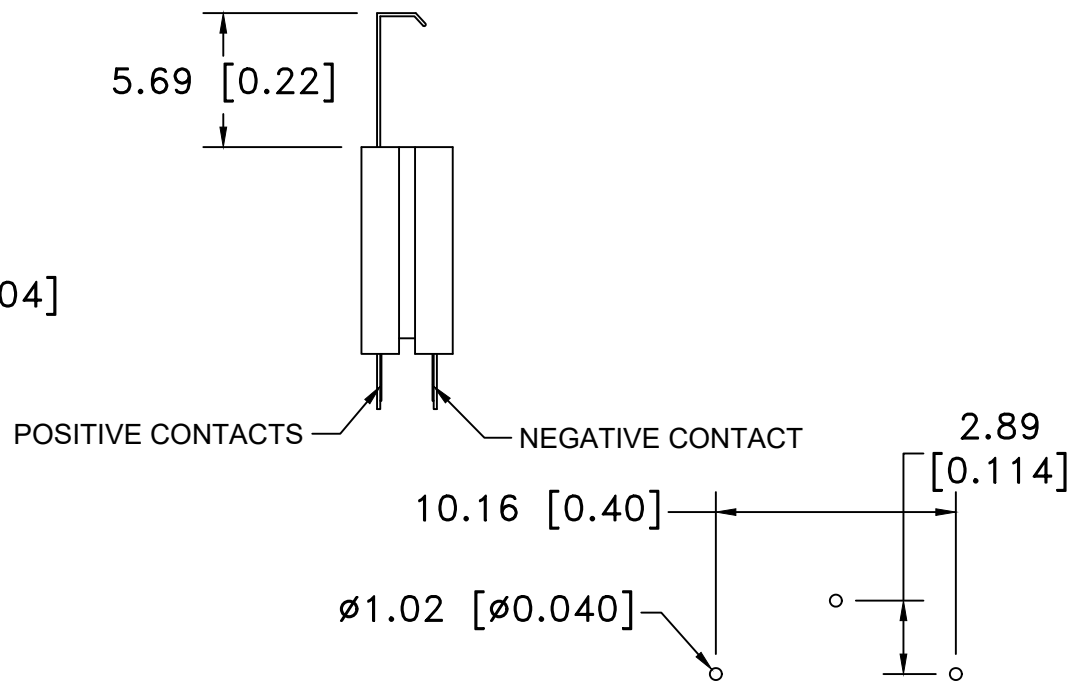



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
06/27/14	E	ADDED GROOVE ON SIDES	T.B.	B.S.	
10/14/16	F	DIM. 2.89 WAS 2.69	T.B.	B.S.	
03/24/17	G	UPDATED UL FILE NUMBER	T.B.	B.S.	
11/22/17	H	ADDED BOTTOM VIEW	T.B.	B.S.	
12/01/17	J	UPDATED SIDE VIEW	T.B.	B.S.	

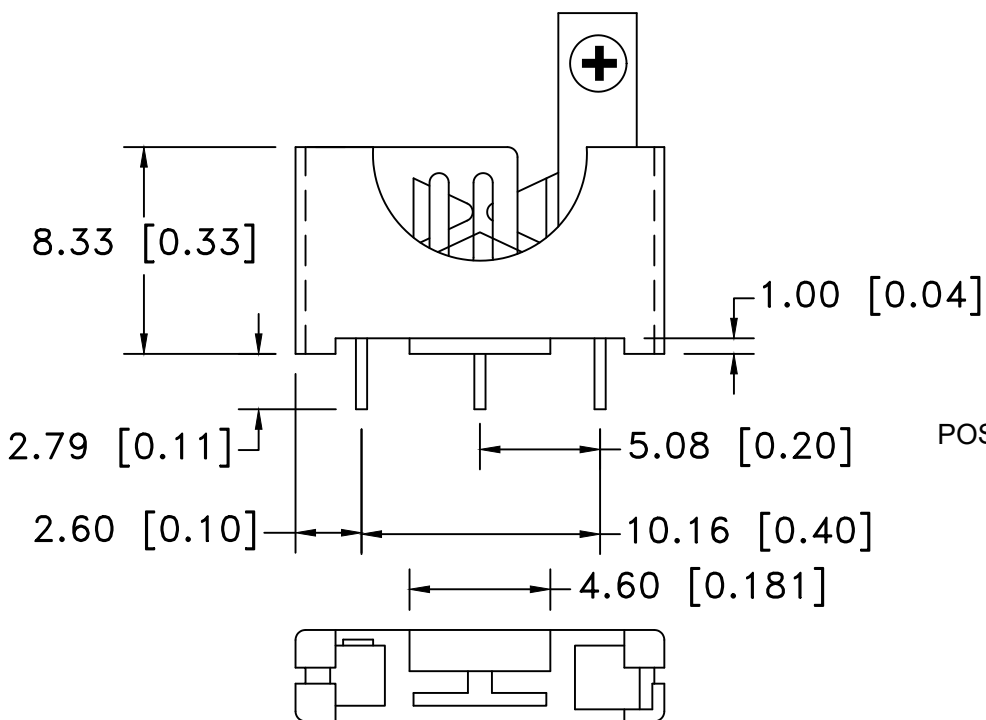

PCB LAYOUT

NOTES:

MATERIAL: GLASS FILLED NYLON 66, UL94V-0
 COLOR BLACK, UL FILE NO. E245249
 CONTACTS: PHOSPHOR BRONZE, C5191, NICKEL PLATED
 ELECTRICAL :
 VOLTAGE: 250V AC
 CONTACT RESISTANCE: 30mΩ MAX
 INSULATION RESISTANCE: 1000mΩ AT DC 500V
 DIELECTRIC STRENGTH: AC 1000V PER MINUTE
 TEMPERATURE RANGE: -40°C TO +200°C
 ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal ±.5 (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional ± .8 (.030)	Title BR/CR/DL 1225 VERTICAL BATTERY HOLDER, 3 PINS		
Angular ± 3°	Date 12/01/17	Drawing Number BS-1225-PC	