

100mA-400mA EOL – Last Buy Date is Jun 30, 2020
 No replacements for these ratings

Type 3AG / 3AP

Fast Blow Fuse Series

HF  3AG/3AP Series, 6x32mm Glass Tube Fast Blow Fuse

RoHS 2 Compliant

Description

6x32mm Fast Blow, glass tube body cartridge fuse designed, approved and complied with UL and CSA standard 248-14.



Features


- Meet UL and CSA standard 248-14
- Wide operating temperature range
- Bulk packing available
- RoHS 2 compliant
- Halogen Free
- Lead Free

Applications



Provide individual protection for components or internal circuits.

- Power supplies
- Battery charger
- Monitor
- Adapter

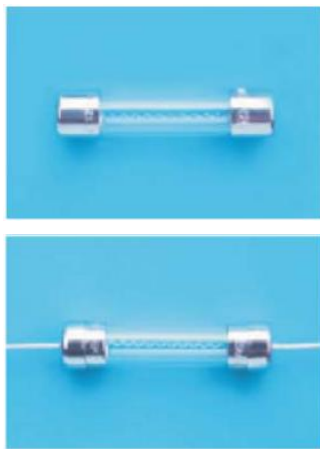LEAD FREE = 
 HALOGEN FREE = 






Physical Specifications

Materials	Body : Ceramic
	Cap : Nickel Plated Brass Caps
	Leads : Matte Tin Plated Copper
Marking	On Fuse : "bel", "3AG", "Current Rating", "Voltage Rating", "Appropriate Safety Logos", "✓" (RoHS 2compliant)
	On Label :
	"bel", "3AG" or "3AP", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and "  ", "  "(China RoHS compliant).

Electrical Characteristics (UL/CSA STD.248-14)

Testing Current	Blow Time	
	Minimum	Maximum
100%	4 hrs.	N/A
135%	N/A	1 hr.
200%	N/A	5 sec

Safety Agency Approvals

Safety Agency	Safety Agency Certificate	Voltage Rating (V)	Ampere Range / Volt @ I.R. ability*
	E20624	100mA-10A/ 250V AC	100mA-10A/250V AC@200A 100mA-15A/125V AC@10,000A
	LR39772		
	JET1037-31003-1010	12A-15A/ 125V AC	1A-5A/125V AC@500A >5A-15A/125V AC@300A
	JET1037-31003-1011		
	JET1037-31003-1007		

*I.R.= Interrupting Rating = Short Circuit Rating(Amps)

Type 3AG / 3AP

Environmental Specifications

Shock Resistance	MIL-STD-202G, Method 213B, Test Condition 1 (100 G's peak for 6 milliseconds; Sawtooth waveform)
Vibration Resistance	MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion).
Salt Spray Resistance	MIL-STD-202G, Method 101E, Test Condition B (48 hrs).
Insulation Resistance	MIL-STD-202G, Method 302, Test Condition A (After Opening) 10,000 ohms minimum.
Solderability	MIL-STD-202G, Method 208H
Resistance to solder Heat	MIL-STD-202G, Method 210F, Test Condition B (260+/-5°C, 10+/-1 sec)
Thermal Shock	MIL-STD-202G, Method 107G, Test Condition B (-65°C to +125°C).
Operating Temperature	-55°C to +125°C
Terminal Strength	IEC-68-2-21

Electrical Specifications

Catalog Number	Ampere Rating	Typical Cold Resistance (ohms)	Volt-drop @ 100%In (Volt) max.	Voltage and Interrupting Ratings	Melting I ² T <10 mSec (A ² Sec)	Melting I ² T @ 10 In (A ² Sec)	Maximum Power Dissipation (W)	Agency Approvals		
								UL	SP	PS
3AG(3AP) 100-R	100mA	11.3	4.62	See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings	0.002	0.002	0.59	Y	Y	
3AG(3AP) 125-R	125mA	10.5	5.18		0.004	0.003	0.80	Y	Y	
3AG(3AP) 160-R	160mA	7.3	4.85		0.008	0.006	0.94	Y	Y	
3AG(3AP) 200-R	200mA	5.0	4.38		0.014	0.010	1.10	Y	Y	
3AG(3AP) 250-R	250mA	3.4	4.05		0.025	0.019	1.29	Y	Y	
3AG(3AP) 300-R	300mA	2.5	3.54		0.044	0.034	1.51	Y	Y	
3AG(3AP) 375-R	375mA	1.86	3.35		0.071	0.055	1.64	Y	Y	
3AG(3AP) 400-R	400mA	1.32	3.22		0.08	0.08	1.71	Y	Y	
3AG(3AP) 500-R	500mA	1.19	3.17		See Table of Safety Approvals on Page 1 for Voltage and associated Interrupting Ratings	0.14	0.11	1.88	Y	Y
3AG(3AP) 750-R	750mA	0.66	2.54	0.19		0.17	2.15	Y	Y	
3AG(3AP) 1-R	1A	0.155	0.28	1.4		1.4	0.37	Y	Y	Y
3AG(3AP) 1.25-R	1.25A	0.114	0.27	2.4		2.5	0.44	Y	Y	Y
3AG(3AP) 1.6-R	1.6A	0.085	0.27	4.2		4.4	0.51	Y	Y	Y
3AG(3AP) 2-R	2A	0.057	0.22	7.2		7.6	0.59	Y	Y	Y
3AG(3AP) 2.5-R	2.5A	0.043	0.21	12		13	0.70	Y	Y	Y
3AG(3AP) 3-R	3A	0.033	0.17	21		23	0.83	Y	Y	Y
3AG(3AP) 3.5-R	3.5A	0.027	0.18	28		31	0.91	Y	Y	Y
3AG(3AP) 4-R	4A	0.024	0.17	36		40	1.00	Y	Y	Y
3AG(3AP) 5-R	5A	0.018	0.16	63		70	1.20	Y	Y	Y
3AG(3AP) 6-R	6A	0.014	0.15	107		123	1.40	Y	Y	Y
3AG(3AP) 7-R	7A	0.012	0.16	141		162	1.60	Y	Y	Y
3AG(3AP) 8-R	8A	0.010	0.15	184		214	1.70	Y	Y	Y
3AG(3AP) 10-R	10A	0.008	0.13	316		372	2.00	Y	Y	Y
3AG(3AP) 12-R	12A	0.006	0.13	501		597	2.40	Y	Y	Y
3AG(3AP) 15-R	15A	0.006	0.15	845		1023	2.80	Y	Y	Y

Consult manufacturer for other ratings

EOL - Last Buy Date is Jun 30, 2020




Specifications subject to change without notice

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302 USA


+1 201.432.0463
Bel.US.CS@belf.com
belfuse.com/circuit-protection

Type 3AG / 3AP

Temperature Derating Curve

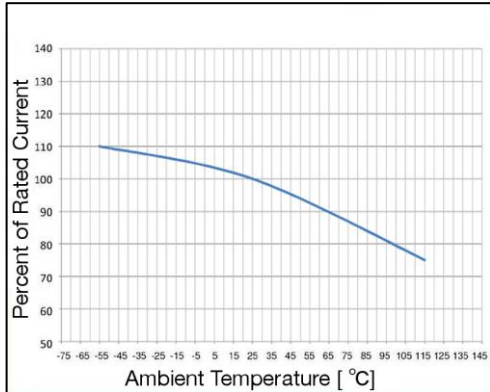


Average Time Current Curve

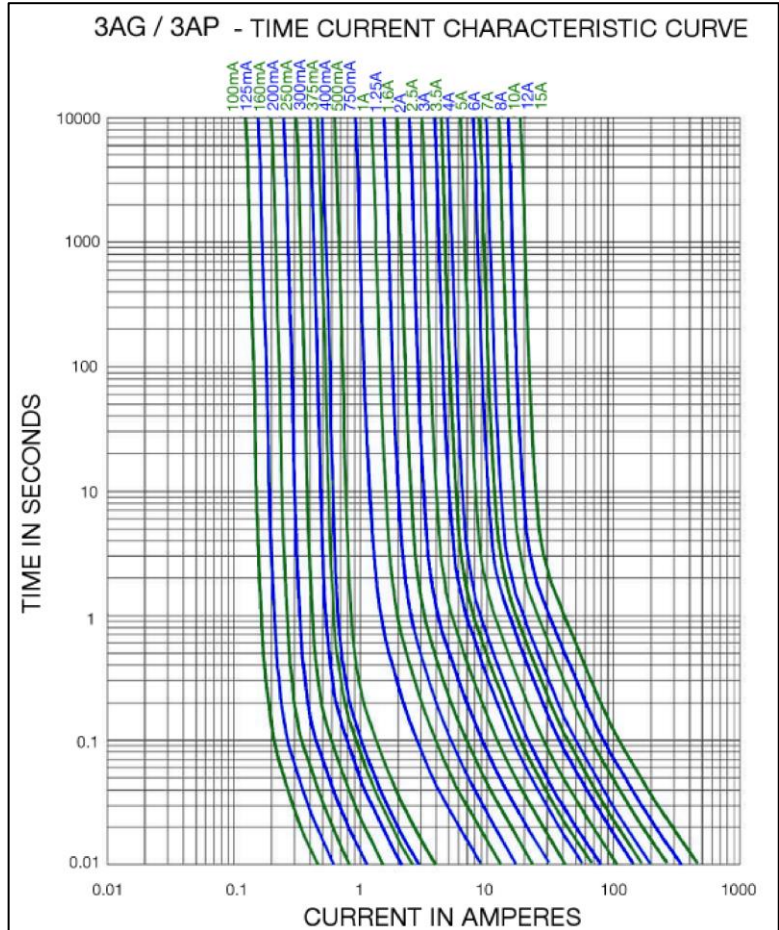

Soldering Parameters

Lead-free Wave Soldering Profile	
Wave Soldering Parameter	
Average ramp-up rate	200°C / second
Heating rate during preheat	typical 1 - 2°C / second Max 4°C / second
Final preheat temperature	within 125°C of soldering temperature
Peak temperature Tp	260°C
Time within +0°C / -5°C of actual peak temperature	10 seconds
Ramp-down rate	5°C / second max.

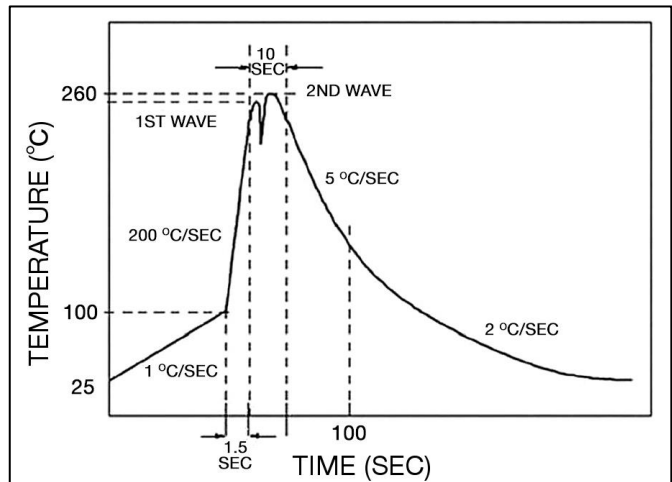

Specifications subject to change without notice

Bel Fuse Inc.
 206 Van Vorst Street
 Jersey City, NJ 07302 USA

+1 201.432.0463
 Bel.US.CS@belf.com
belfuse.com/circuit-protection

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Bel:](#)

[3AG 500-R](#) [3AG 10-R](#) [3AG 5-R](#) [3AG 3-R](#) [3AG 15-R](#) [3AG 2.5-R](#) [3AP 2.5-R](#) [3AG 3.5-R](#) [3AP 250-R](#) [3AP 400-R](#)
[3AP 15-R](#) [3AP 8-R](#) [3AP 10-R](#) [3AG 125-R](#) [3AG 8-R](#) [3AG 7-R](#) [3AP 750-R](#) [3AG 250-R](#) [3AP 1-R](#) [3AP 6-R](#) [3AP 12-R](#)
[3AG 400-R](#) [3AP 100-R](#) [3AP 375-R](#) [3AG 6-R](#) [3AP 1.6-R](#) [3AP 2-R](#) [3AP 3.5-R](#) [3AG 100-R](#) [3AP 7-R](#) [3AG 300-R](#)
[3AP 5-R](#) [3AG 200-R](#) [3AG 375-R](#) [3AG 2-R](#) [3AP 300-R](#) [3AG 160-R](#) [3AG 1.5-R](#) [3AP 1.25-R](#) [3AP 160-R](#) [3AP 500-R](#)
[3AG 1.6-R](#) [3AG 1.25-R](#) [3AP 4-R](#) [3AG 750-R](#) [3AP 200-R](#) [3AG 1-R](#) [3AG 4-R](#) [3AG 12-R](#) [3AP 125-R](#) [3AP 3-R](#)