

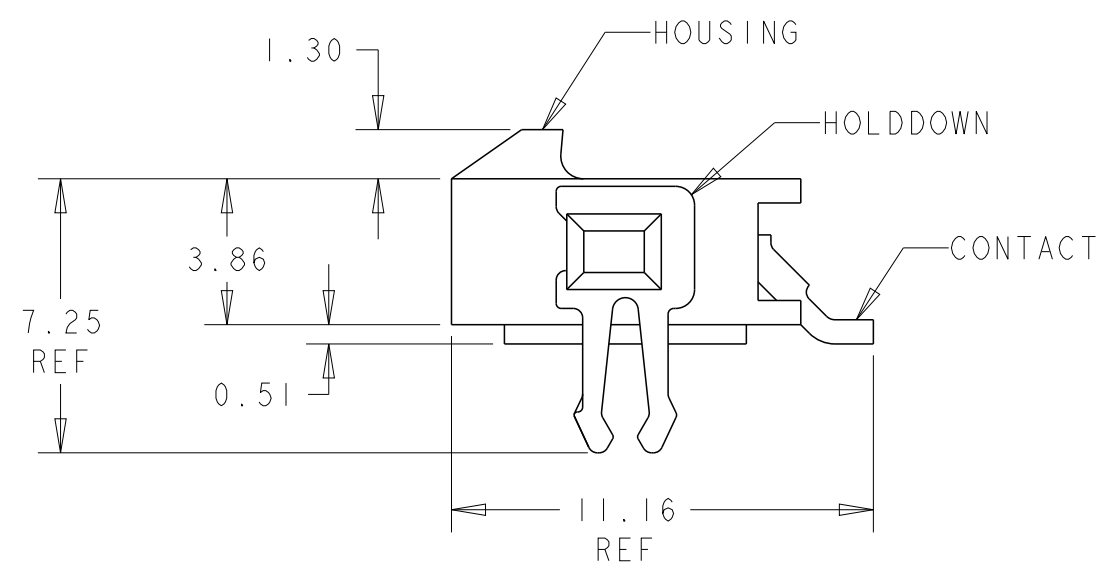


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	BI	REVISED PER ECR-16-011494	20JUN2017	NK	CX

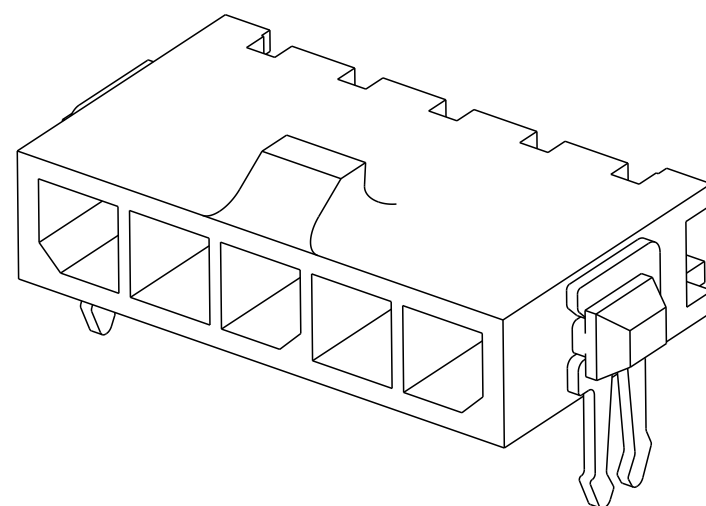


2 PLATING: CONTACTS - 0.38 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM TIN LEAD ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLD DOWNS: 2.54 μ m MINIMUM TIN-LEAD OVER 1.27 μ m MINIMUM
NICKEL.

5 PLATING: CONTACTS - 0.38 μ m MINIMUM GOLD ON MATING END,
2.54 μ m MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER
1.27 μ m MINIMUM NICKEL.
HOLDDOWNS: 2.54 μ m MINIMUM MATTE TIN OVER 1.27 μ m MINIMUM
NICKEL.

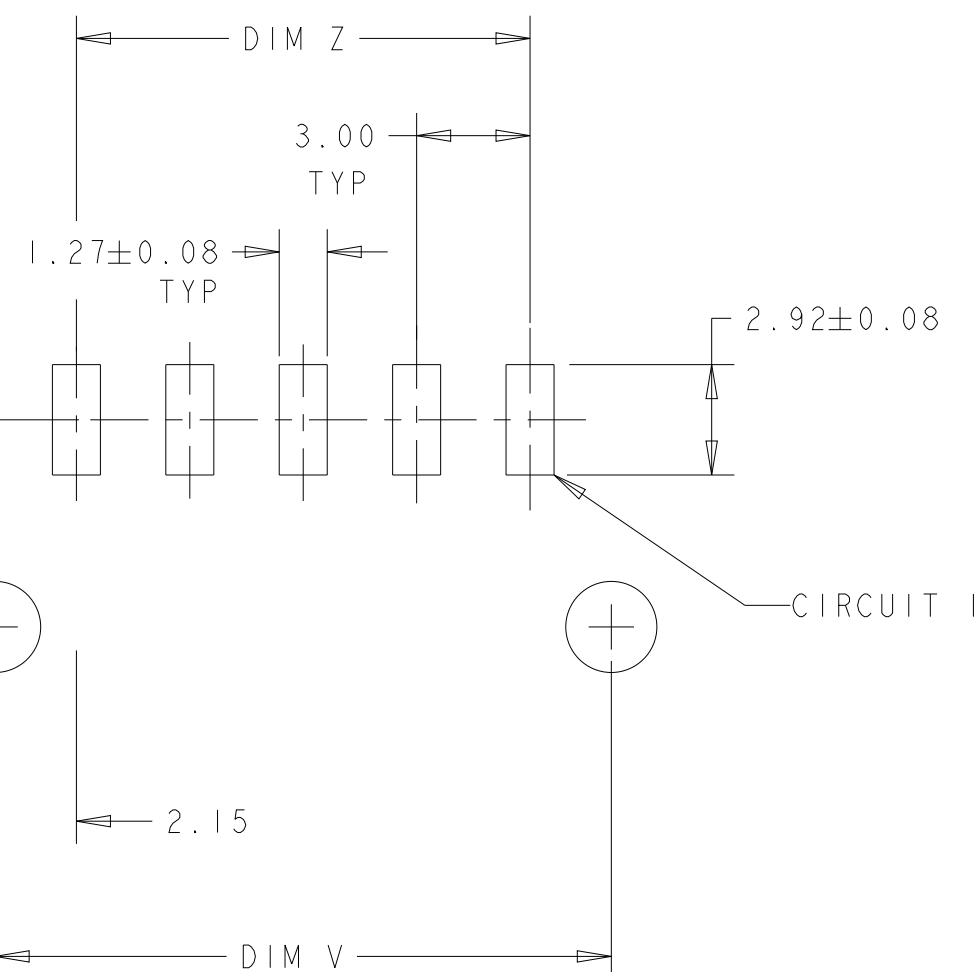

SUPERSEDED BY 3-1445090-2		33.00	37.43	40.00	12	1-1445090-2
SUPERSEDED BY 3-1445090-1		30.00	34.43	37.00	11	1-1445090-1
SUPERSEDED BY 3-1445090-0		27.00	31.43	34.00	10	1-1445090-0
SUPERSEDED BY 2-1445090-9		24.00	28.43	31.00	9	1445090-9
SUPERSEDED BY 2-1445090-8		21.00	25.43	28.00	8	1445090-8
SUPERSEDED BY 2-1445090-7		18.00	22.43	25.00	7	1445090-7
SUPERSEDED BY 2-1445090-6		15.00	19.43	22.00	6	1445090-6
SUPERSEDED BY 2-1445090-5		12.00	16.43	19.00	5	1445090-5
SUPERSEDED BY 2-1445090-4		9.00	13.43	16.00	4	1445090-4
SUPERSEDED BY 2-1445090-3		6.00	10.43	13.00	3	1445090-3
SUPERSEDED BY 2-1445090-2		3.00	7.43	10.00	2	1445090-2

		FINISH	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER		
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN J. ROOT	09OCT2000		 TE Connectivity			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK K. WHITAKER	17-APR-2001				
				APVD C. JONES	17-APR-2001				
		0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC -	NAME RIGHT ANGLE SURF MOUNT HEADER ASSY, 0.38 MIC GOLD CONTACTS, W/THRU HOLE HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™				
MATERIAL		FINISH		APPLICATION SPEC -					
		SEE TABLE		WEIGHT -	A2	CAGE CODE 00779	DRAWING NO C=1445090	RESTRICTED TO -	
CUSTOMER DRAWING							SCALE 5:1	SHEET 1 OF	REV B1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1445090-2](#)