


P.C. BOARD LAYOUT FOR 4 PIN 74626-X11XB

NOTES:





1. MATERIAL:
CONTACTS: COPPY ALLOY
SHELL: COPPY ALLOY
HOUSING: UL 94V-0 RATED THERMOPLASTIC
2. PLATING:
SEE PRODUCT NUMBER CODE
3. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
4. RECOMMENDED PC BOARD THICKNESS OF 1.57mm
5. 2.67mm MAXIMUM PANEL THICKNESS IF MOUNTED BEHIND PANEL
6. CONTACT PLATING CODE OPTION 1 DOES NOT MEET THE PLATING SPECIFIED PER UNIVERSAL SERIAL BUS SPECIFICATION REVISION 1.0
7. MAXIMUM PANEL THICKNESS TO BE 2.67mm IF MOUNTED BEHIND PANEL.
8. TORQUE SPEC 2.0kgf-cm MAX.

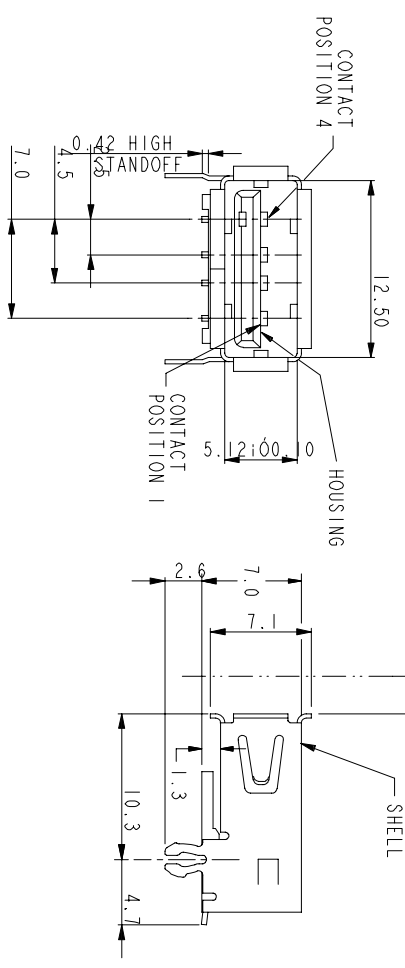

Copyright FCI.

REV	ECN NO.	DR	DATE
M	N05-0103	PH	04/06/05
N	N06-0298	HB	11/29/06
P	N08-0031	R.B	2008/02/27
R	N08-0238	R.B	2008/11/03
S	ELX-N15753	R.B	2013/09/05

www.fciconnect.com				surface		tolerance		std		projection		MM	
TOLERANCES UNLESS OTHERWISE SPECIFIED				ANGULAR		LINEAR		0.X		±0.3		size A4	
DR PETER				7/8/98		7/8/98		0.XX		±0.2		scale 1:1	
ENG R Y LIU				7/8/98		7/8/98		0.XX		±		ECN ELX-N15753	
CHR R Y LIU				7/8/98		7/8/98		0.XX		±		Spec ref	
APPR JENN TSAO				7/8/98		7/8/98		0.XX		±		Rev.	
USB REVERSED				RECEPTACLE SMT		74626		S		Rev.		S	
catalog no				CUSTOMER		sheet 1 of 3							

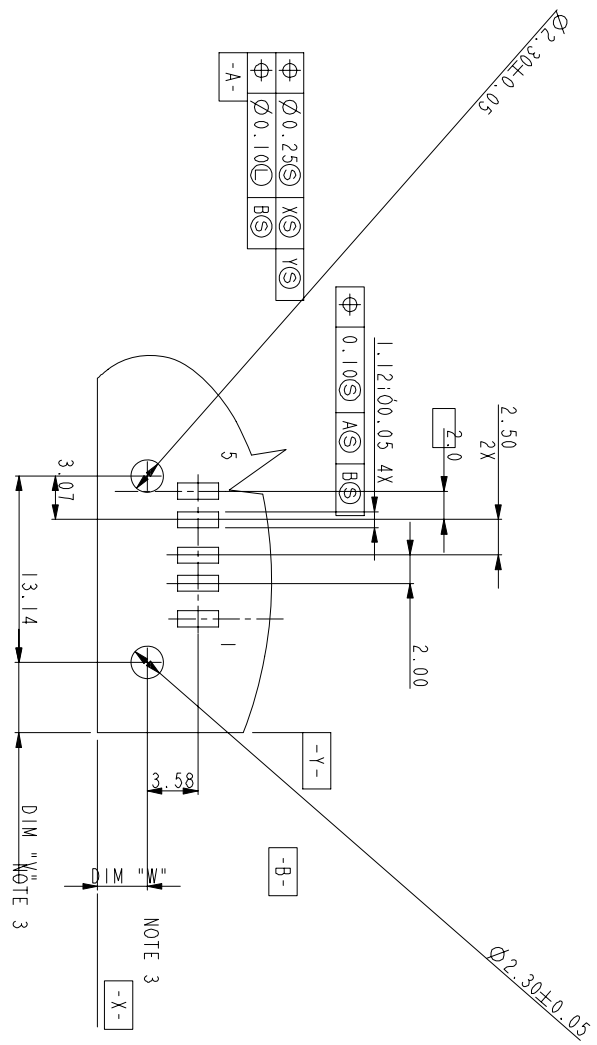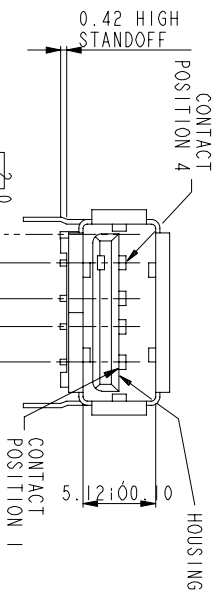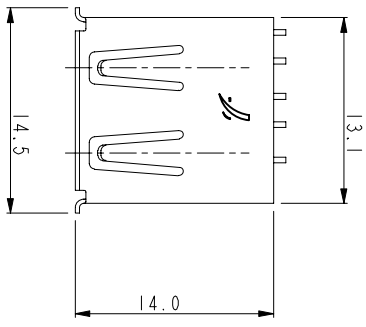

P.C. BOARD LAYOUT FOR 5 PIN 74626-X01XB

www.fciconnect.com		surface		tolerance std		projection		MM	
Dr	PETER	7/8/98	ANGULAR	0.X	±0.3	⌀	size	A4	Scale
Eng	R Y LIU	7/8/98	LINEAR	0.XX	±0.2				1:1
Chr	R Y LIU	7/8/98	0° ±5°	0.XXX	±		ECN	ELX-N15753	
Appr	JENN TSAO	7/8/98	Product family		Spec ref				

USB REVERSED		RECEPTACLE SMT		CUSTOMER		sheet 2 of 3	
FCI		74626		Rev.		S	
catalog no		dwg					



Copyright FCI.


REV F - 2004-11

PRODUCT NUMBER CODE

74626 - X X X X P LF

BASE PRODUCT NUMBER
HOUSING COLOR OPTIONS
0 - WHITE
1 - BLACK
2 - WHITE + SHELL NICKEL PLATING ONLY
SENSOR CONTACT OPTION
0 - WITH SENSOR CONTACT
1 - WITHOUT SENSOR CONTACT
SHELL OPTIONS
1 - WITHOUT BACK SHIELD
3 - WITHOUT BACK SHIELD & NICKEL PLATING ONLY
S - WITHOUT BACK SHIELD & NICKEL PLATING ONLY
(SPECIAL MATERIAL FOR DURABILITY 12,000 CYCLES)
TERMINAL PLATING OPTION
0 - 1.25um Ni UNDERPLATE
0.76um GXT CONTACT AREA
2.50 um TIN/LEAD TAIL AREA
PACKAGING OPTION
B - TUBES
R - TAPE & REEL

DATE CODE
LEAD FREE

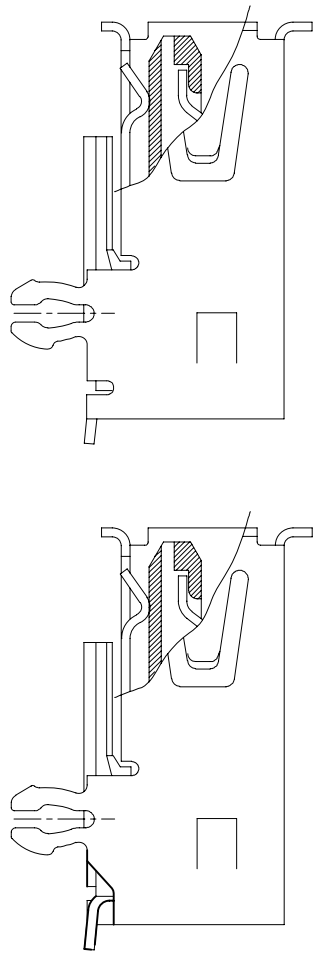

STYLE 1
STYLE 2

- NOTES:
- 1. P/N'S WITH SUFFIX "LF" ARE LEAD FREE P/N'S
 - 2. PACKING STANDARD GS-14-920 WILL BE APPLIED FOR LEAD FREE P/N'S
 - 3. FOR LEAD FREE P/N, THE PRODUCT MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008
 - 4. FOR LEAD FREE P/N, THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRARED OR VAPOR PHASE REFLOW OVEN.
 - 5. AVAILABLE P/N'S NOW IN FCI ARE

PART NUMBER	STYLE
74626-010XXLF	STYLE 1
74626-1010XXLF	STYLE 1
74626-0110XXLF	STYLE 1
74626-1130XXLF	STYLE 1
74626-2010XXLF	STYLE 2
74626-2110XXLF	STYLE 2
74626-1110XXLF	STYLE 1
74626-01S0XPLF	STYLE 2
74626-11S0XPLF	STYLE 2

www.fciconnect.com		surface		tolerance std		projection		MM	
TOLERANCES UNLESS OTHERWISE SPECIFIED		ANGULAR		0.X		±0.3		size A4	
Eng PETER		7/8/98		R Y LIU		7/8/98		Chr R Y LIU	
JENN TSAO		7/8/98		Product family		ECN		ELX-N15753	
USB REVERSED		RECEPTACLE SMT		CUSTOMER		74626		Rev. S	
catalog no		sheet 3 of 3							



Copyright FCI.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

[74626-0110BLF](#) [74626-0010BLF](#) [74626-11S0BPLF](#) [74626-11S0RPLF](#)