


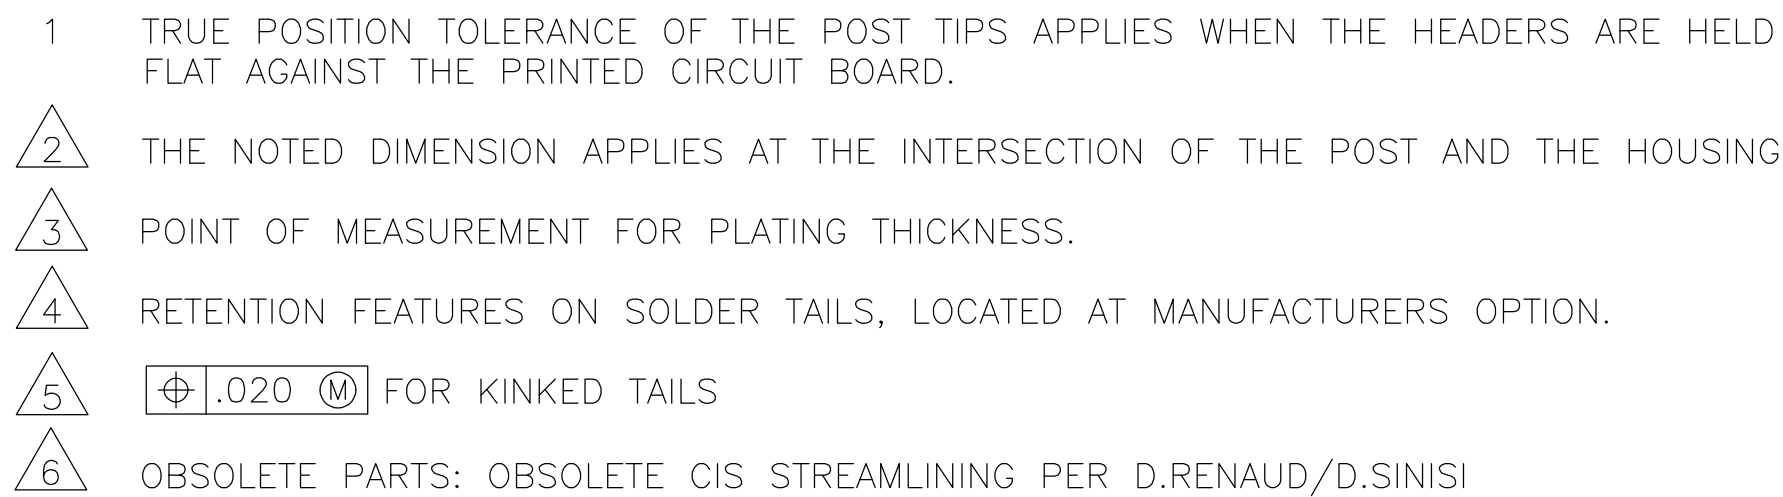

6 SUP BY 7-146289-4	6 OBSOLETE	3.984	3.900	39	40	2-104426-7
		3.484	3.400	34	35	2-104426-6
		2.984	2.900	29	30	2-104426-5
		2.584	2.500	25	26	2-104426-4
		2.484	2.400	24	25	2-104426-3
		2.384	2.300	23	24	2-104426-2
	6 OBSOLETE	2.284	2.200	22	23	2-104426-1
		2.184	2.100	21	22	2-104426-0
		2.084	2.000	20	21	1-104426-9
		1.984	1.900	19	20	1-104426-8
		1.884	1.800	18	19	1-104426-7
		1.784	1.700	17	18	1-104426-6
		1.684	1.600	16	17	1-104426-5
		1.584	1.500	15	16	1-104426-4
		1.484	1.400	14	15	1-104426-3
		1.384	1.300	13	14	1-104426-2
		1.284	1.200	12	13	1-104426-1
		1.184	1.100	11	12	1-104426-0
		1.084	1.000	10	11	1-104426-9
		.984	.900	9	10	104426-8
6 OBSOLETE	.884	.800	8	9	104426-7	
	.784	.700	7	8	104426-6	
	.684	.600	6	7	104426-5	
	.584	.500	5	6	104426-4	
	.484	.400	4	5	104426-3	
	.384	.300	3	4	104426-2	
	.284	.200	2	3	104426-1	
	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN H. MOLL	28JUN88			TE Connectivity			
			CHK R. FEIDT	28JUN88						
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. FEIDT	28JUN88	NAME					
		0 PLC ± -	PRODUCT SPEC	HEADER ASSY, MOD II, BREAKAWAY, SINGLE ROW, .100 CL VERT, 025 SQ POSTS, WITH RETENTION FEATURE						
		1 PLC ± -	—							
		2 PLC ± -	APPLICATION SPEC							
		3 PLC ± .005	—							
		4 PLC ± -								
		ANGLES ± -								
MATERIAL	HOUSING: FLAME RETARDANT THERMOPLASTIC COLOR-BLACK	FINISH POSTS: .000030 GOLD IN CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON SOLDER TAIL ALL OVER .000050 NICKEL	WEIGHT	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO		
POSTS: COPPER ALLOY			A2	00779	C-104426	—				
CUSTOMER DRAWING					SCALE	4 : 1	SHEET	1 of 1	REV	K

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[104426-8](#)