

D

C

B


A

D


C

B

A

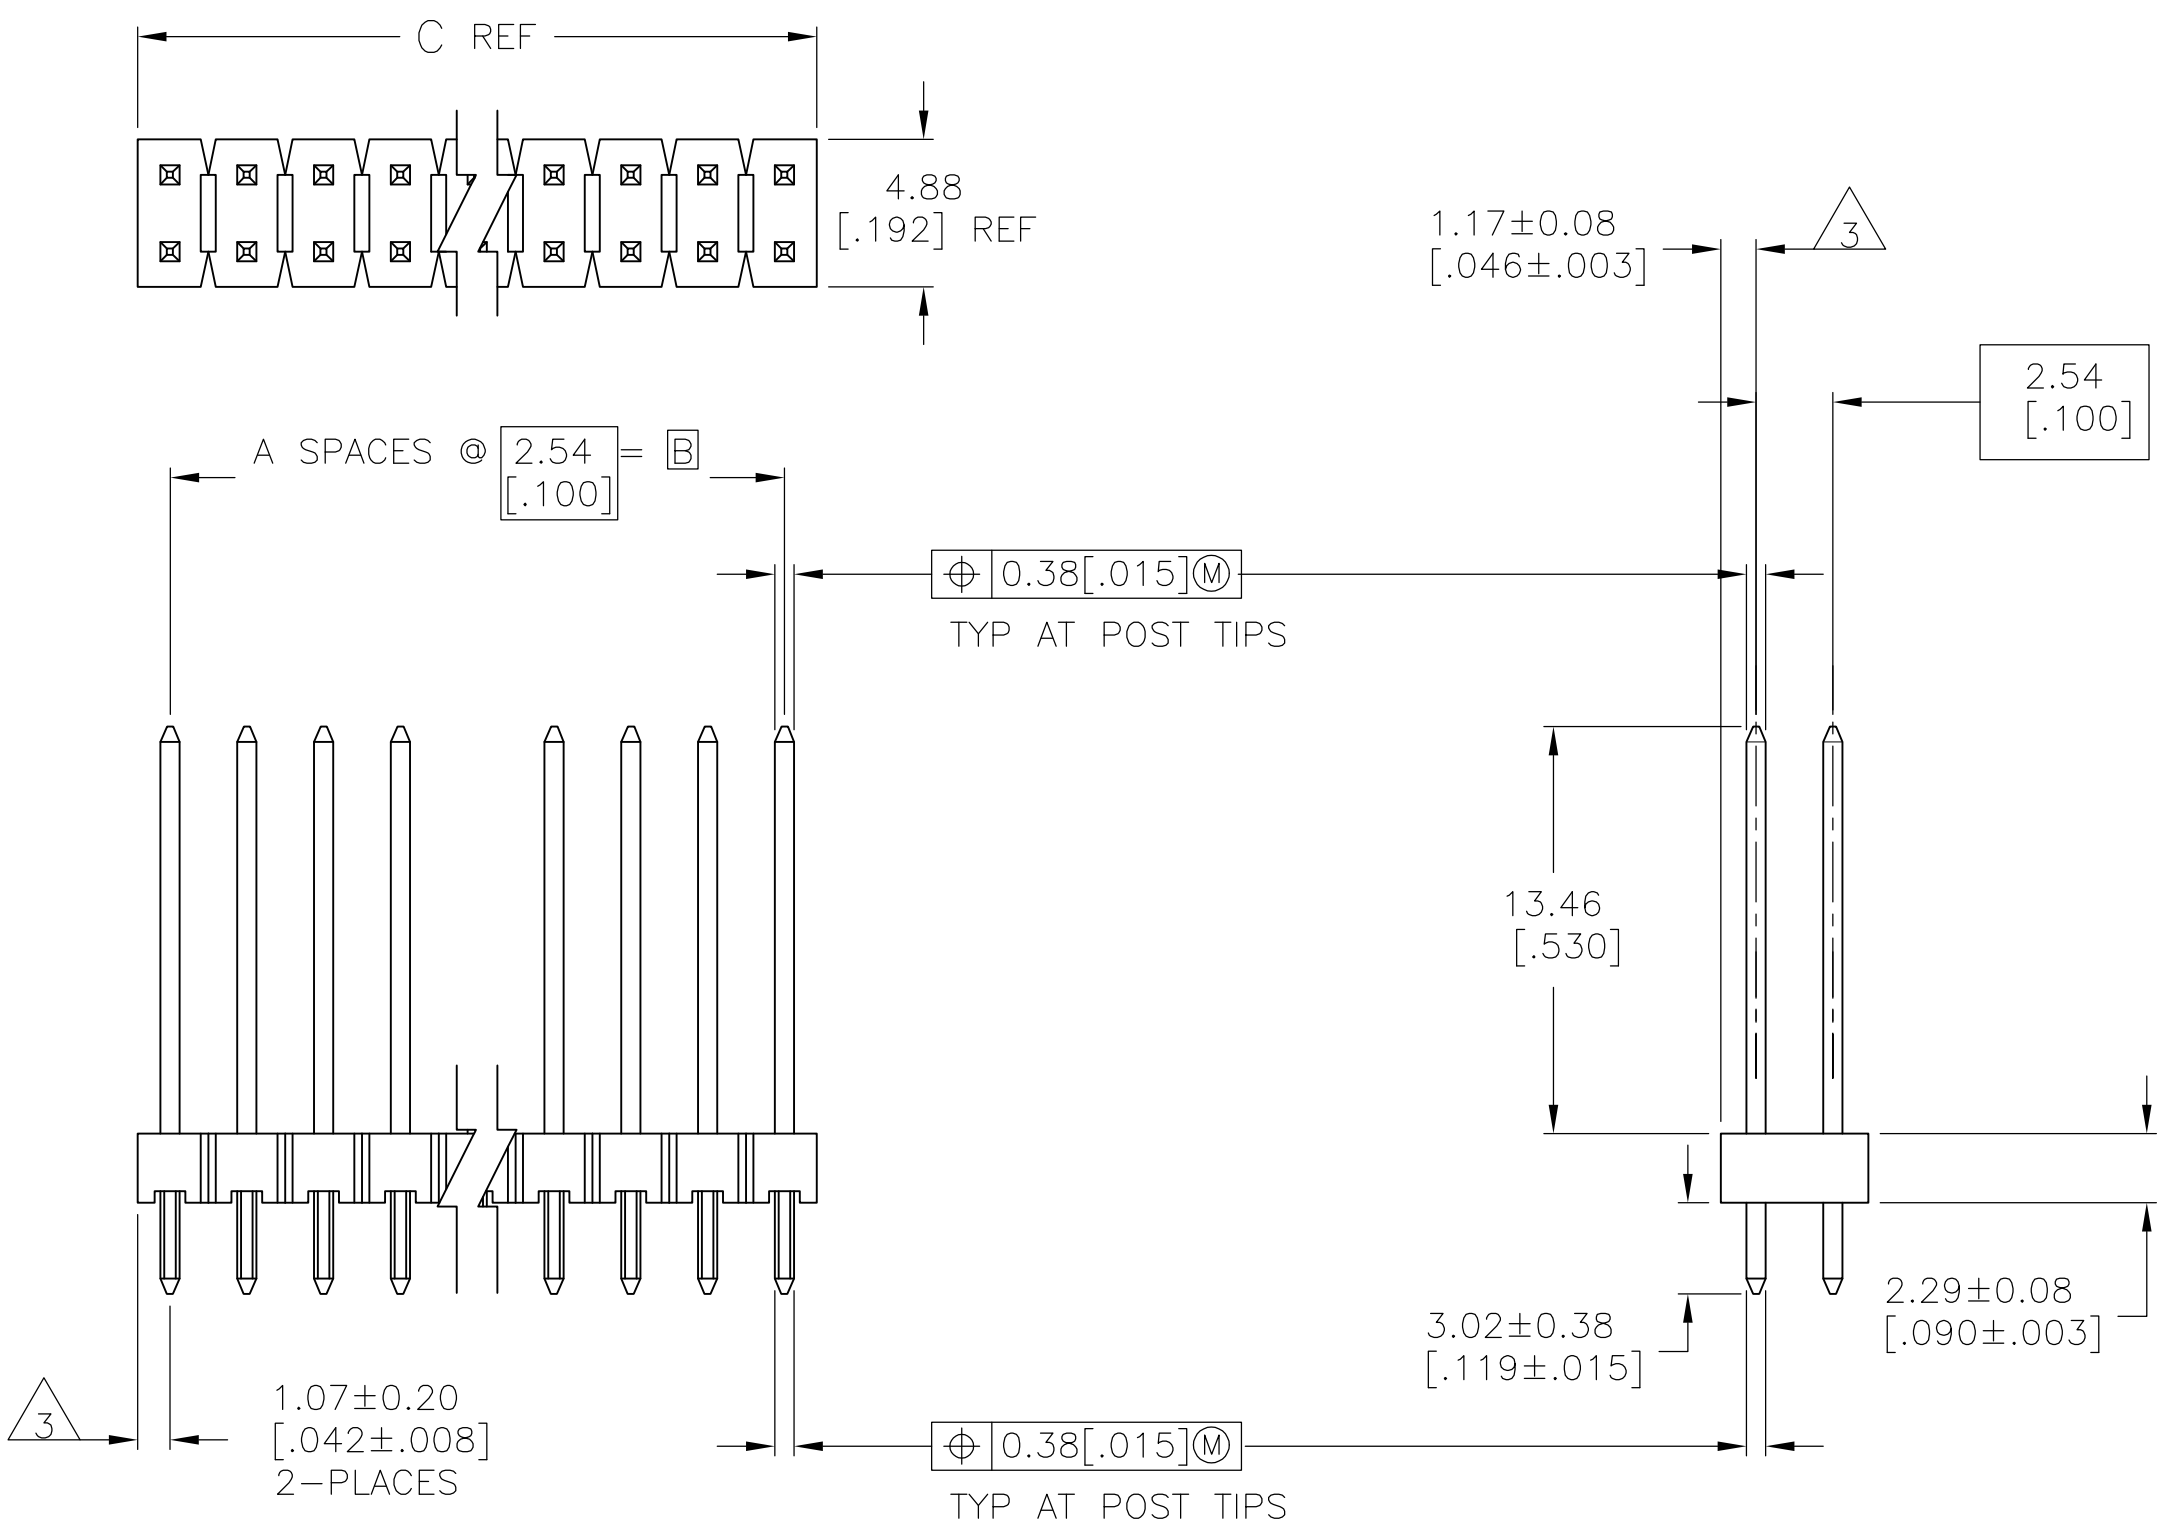

- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 PLATING: 0.00254[.000100]–0.00508[.000200] MATTE TIN–LEAD OVER 0.00127[.000050] NICKEL.
- 5 MATERIAL: HOUSING – FLAME RETARDANT THERMOPLASTIC,COLOR – BLACK, POSTS – COPPER ALLOY
- 6 PLATING: 0.00254[.000100]–0.00508[.000200] MATTE TIN OVER 0.00127[.000050] NICKEL.
- 7 HIGH TEMPERATURE CONFIGURATION

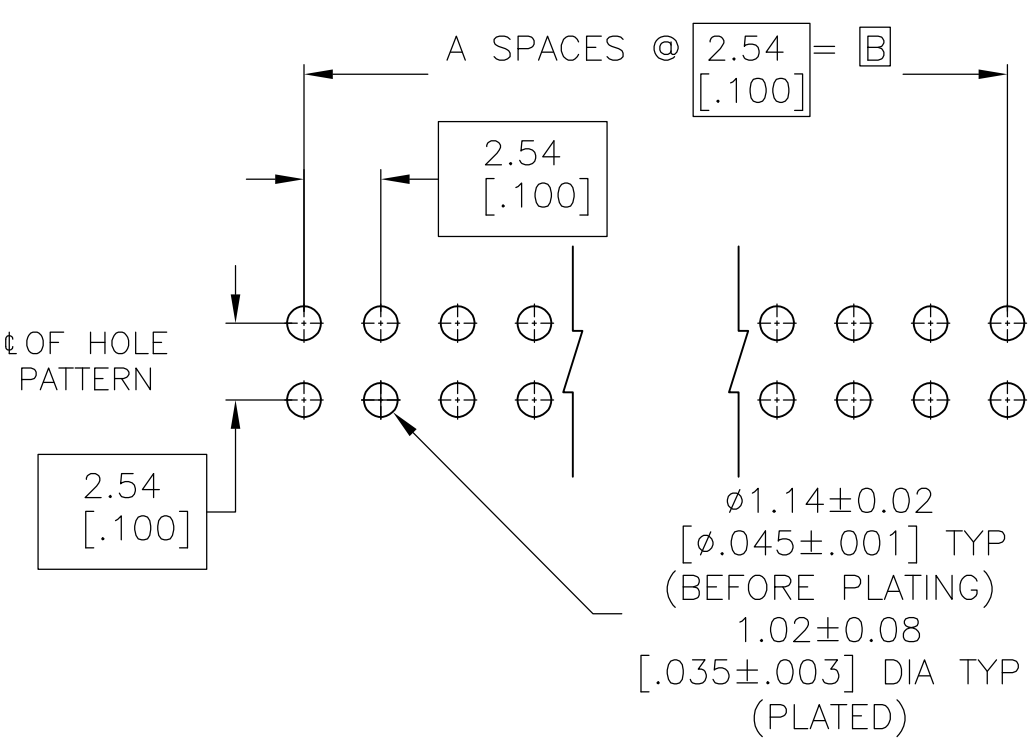

SUPERCEDED BY 5-146818-1

7	6	50.39 [1.984]	48.26 [1.900]	19	40	5-146818-1
—	4	50.39 [1.984]	48.26 [1.900]	19	40	146818-1
REMARKS	PLATING	C	B	A	NO. OF POSITIONS	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. BRANDBERG 30-JAN-97	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK G. DUBNICZKI 30-JAN-97				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD G. DUBNICZKI 30-JAN-97				
0 PLC ± - 1 PLC ± - 2 PLC ± 0.51[.02] 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -		PRODUCT SPEC — APPLICATION SPEC —				
MATERIAL 5		FINISH SEE TABLE	WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C-146818
CUSTOMER DRAWING				SCALE 4:1	SHEET 1 OF 1	REV C1

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-146818-1](#)