

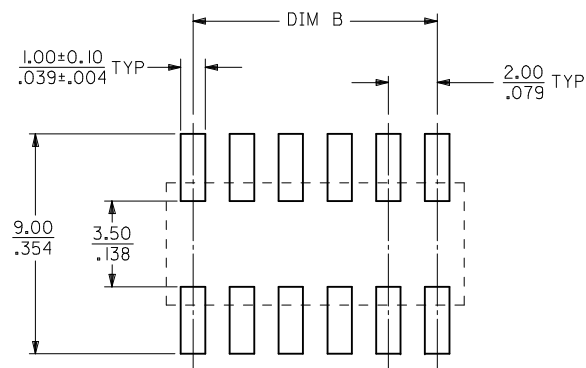
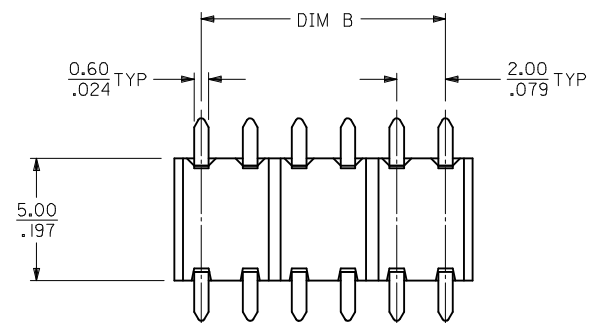


PART NUMBER IN TAPE/REEL 0.76um/30u" GOLD	PART NUMBER IN TAPE/REEL 0.38um/15 u" GOLD	CKT. SIZE	DIM A	DIM B	W	EMBOSSED TYPE
-	87368-1110	10	10.20/0.402	8.00/0.315	24.00/0.945	A
-	87368-1112	12	12.20/0.480	10.00/0.394	24.00/0.945	A
87368-0320	87368-1120	20	20.20/0.795	18.00/0.709	32.00/1.260	B
-	87368-1140	40	40.20/1.583	38.00/1.496	56.00/2.205	C
-	87368-1150	50	50.20/1.976	48.00/1.890	72.00/2.835	B

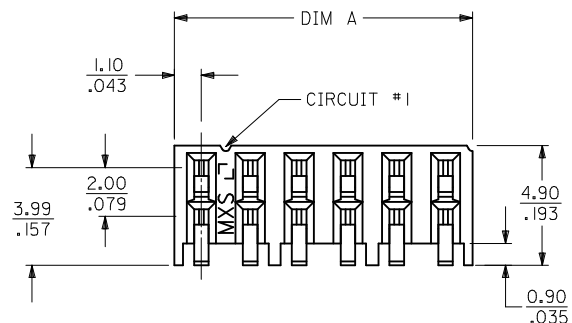

RECOMMENDED PC BOARD LAYOUT

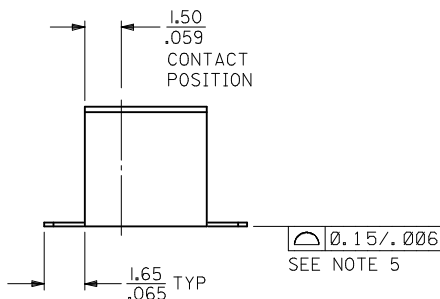


NOTE:

- MATERIAL: HOUSING - NYLON, GLASS FILLED, UL94V-0
COLOR: BLACK
TERMINAL - PHOSPHOR BRONZE
- FINISHES: TERMINAL - SELECTIVE GOLD IN THE CONTACT AREA:
THICKNESS = SEE TABLE
2.54um/100um MIN. SELECTIVE TIN
IN THE PC SOLDER TAIL AREA
BOTH OVER 1.27um/50um MIN. NICKEL OVERALL
- PRODUCT SPECIFICATION: PS-87264
- CIRCUIT SIZE 12 IS SHOWN FOR ILLUSTRATION ONLY, SEE CHART FOR AVAILABLE CIRCUIT SIZES.
- COPLANARITY OF SOLDER TAIL IS TO BE MEASURED BY RESTING THE PART ON A FLAT GAUGE SURFACE.
- PART MATEABLE TO ALL MILLI-GRID HEADERS WITH MATING PIN LENGTH BETWEEN 2.50mm AND 4.20mm.
- PART IS PACK IN TAPE AND REEL.
- PARTS SHALL BE PACKED IN MOISTURE BARRIER BAG.


CORRECT PILOT HOLES LOCATION				DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION		
						mm	INCH	MM/IN		NTS	METRIC			
EC NO: S2010-0008 DRWN:SKANG CHKD:ATSEE APPR:MLONG 2009/07/14 2009/07/14 2009/07/17						4 PLACES	± ---	± ---	DRAWN BY	DATE	TITLE MGRID SIDE ENTRY RECEPTACLE SMT			
						3 PLACES	± ---	± .008	CHECKED BY	DATE				
						2 PLACES	± 0.20	± ---	LCHANG	1999/06/10				
						1 PLACE	± ---	± ---	APPROVED BY	DATE	MOLEX MOLEX INCORPORATED			
ANGULAR ± 3 °			JLIM			1999/06/17	DOCUMENT NO.		SHEET NO.					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE TABLE		SD-87368-001		1 OF 2						
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

EMBOSSED TYPE A

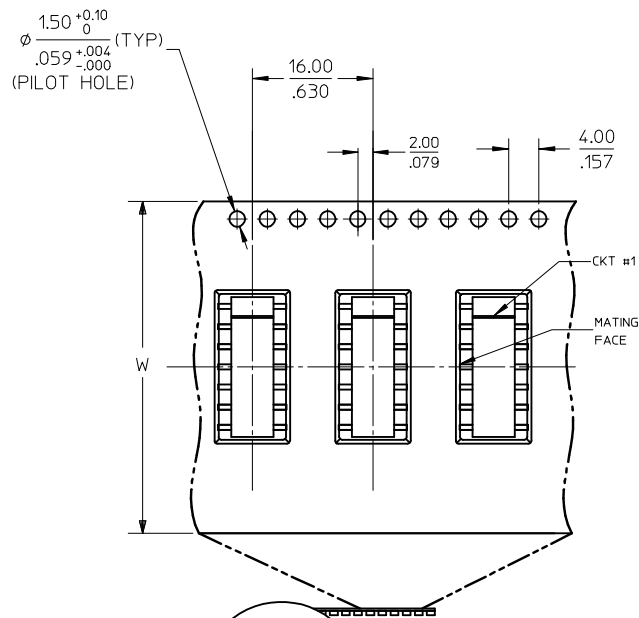


NOTES:

1. LEADER AND TRAILER TAPE

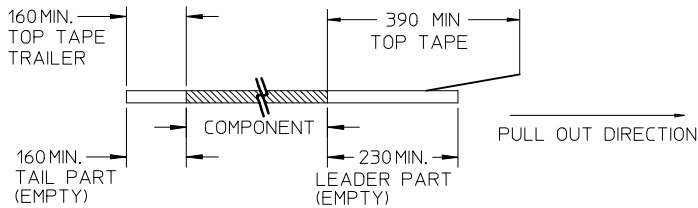




2. PEELING OFF FORCE OF THE TOP TAPE: 20-80gf. (PEELING DIRECTION AS SHOWN IN FOLLOWING FIGURE)



3. PACKAGING STANDARD IS AS PER EIA-481.



4. TAPE & REEL QUANTITY = 750PCS/REEL

EMBOSSED TYPE B

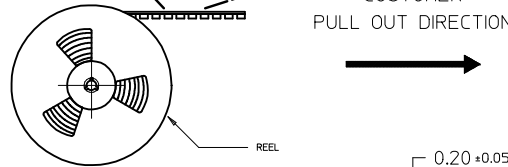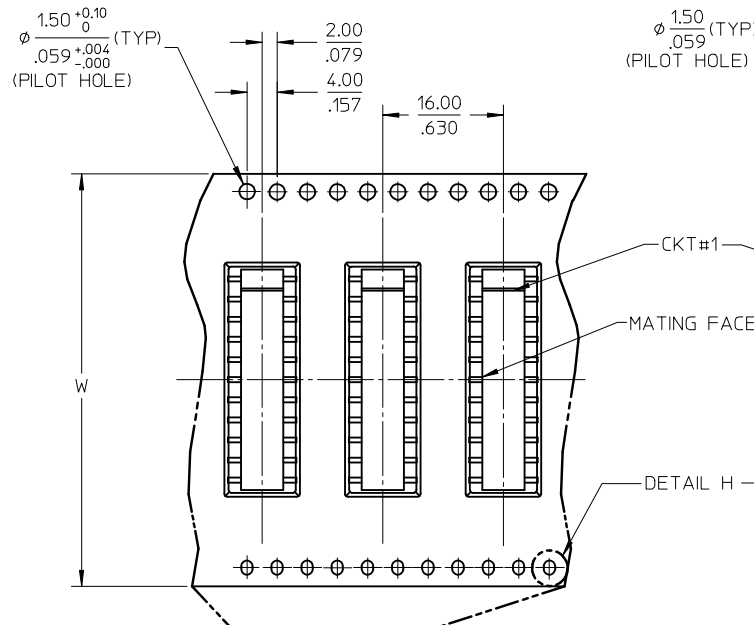

DETAIL H
(ELONGATED HOLE)

EMBOSSED TYPE C

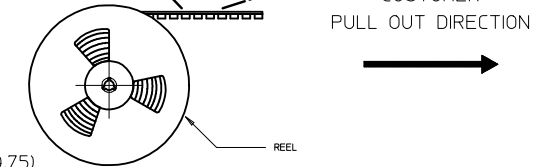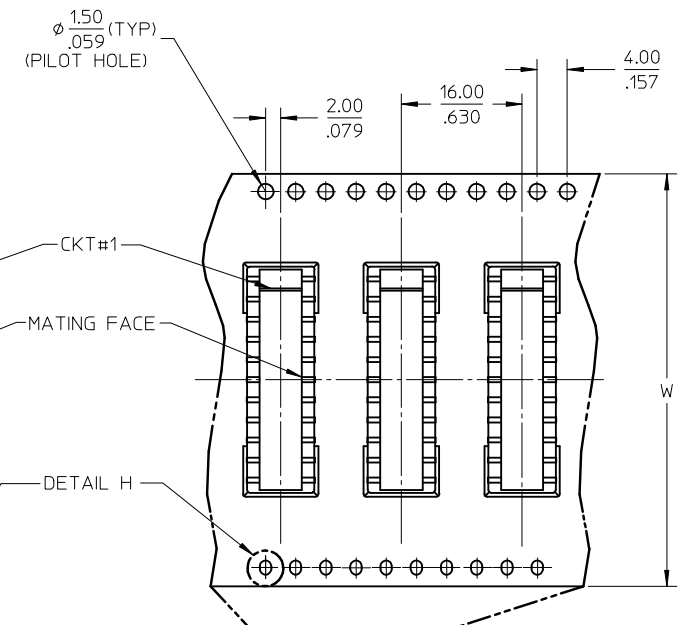

CORRECT PILOT HOLES LOCATION			QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
						MM/IN		NTS	METRIC				
EC NO: S2010-0008				 =0  =0	mm	INCH	DRAWN BY	DATE	TITLE MGRID SIDE ENTRY RECEPTACLE SMT				
DRWN:SKANG					4 PLACES	± ---	± ---	JSGOH					1999/02/12
2009/07/14					3 PLACES	± ---	± .008	CHECKED BY					DATE
CHKD:ATSEE					2 PLACES	± 0.20	± ---	LCHANG	1999/06/10				
2009/07/14					1 PLACE	± ---	± ---	APPROVED BY	DATE	MOLEX INCORPORATED			
APPR:MLONG				ANGULAR ± 3 °			JLIM	1999/06/17					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
							SEE TABLE		SD-87368-001		2 OF 2		
D4			REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

87368-1110