




605 Series Snap-in LED - 5mm Mounting Hole Panel Mount Indicators

Features & Benefits

- RoHS Compliant
- Long Life - typically 100K hours
- Low power consumption - uses up to 90% less energy than an incandescent indicator
- No heat generated
- Colors include red, green and yellow
- Front panel mounting
- LED can be recessed or protrude from housing

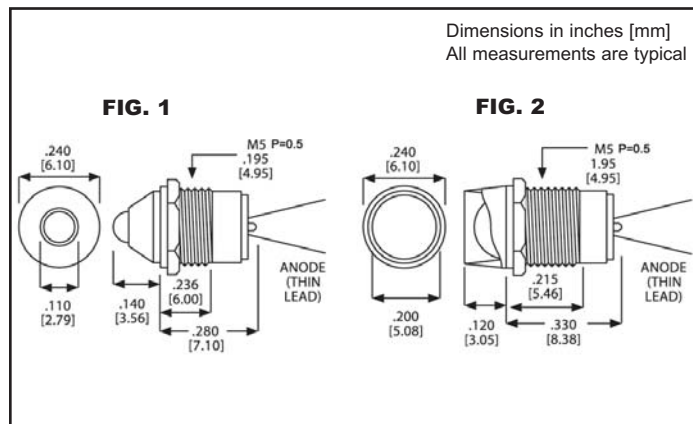

Application

Dialight's 600 series of metric indicators are designed for a variety of applications such as:

- Main and remote power indication
- Status Indication
- Maintenance and warning indication
- Instrumentation
- ... and many more!

Mechanical Information

Mounting Hole Size: 0.249 - 0.252" (6.32 - 6.40 mm)

Maximum Panel Thickness: 0.138 inches (3.5 mm)

Electrical Specifications

Operating Voltage: 2 VDC (current limiting resistor required)

Operating Temp: -25°C to +85°C

Storage Temp: -25°C to +100°C

Electrical connection: Through leads

Leads: Straight leads

Construction

Housing: Chrome plated brass



Part Number	Color	Voltage (VDC)	Current (mA)	Typ. Intensity (mcd)	LED positions	Finish	Figure	RoHS Compliant
605-1111-110F	Red	2	15	38	Protruding	Chrome	1	•
605-1211-110F	Green	2	15	72	Protruding	Chrome	1	•
605-1311-110F	Yellow	2	15	53	Protruding	Chrome	1	•
605-2111-110F	Red	2	15	38	Recess	Chrome	2	•
605-2211-110F	Green	2	15	72	Recess	Chrome	2	•
605-2311-110F	Yellow	2	15	53	Recess	Chrome	2	•

Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: www.dialight.com/Assets/Brochures_And_Catalogs/Indication/MDEL605X001.pdf

Warranty Statement: EXCEPT FOR THE WARRANTY EXPRESSLY PROVIDED FOR [HEREIN/ABOVE/BELOW], DIALIGHT DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NONINFRINGEMENT.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

[605-2111-110F](#) [605-2211-110F](#) [605-2311-110F](#)