

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0950435894](#)
Status: **Active**
Overview: [Magnetic and Modular Jacks and Plugs](#)
Description: Modular Plug, Cat5e, Short Body, Shielded, 8/8, Red Boot, for 6.00mm Cable Outside Diameter

Documents:

- [Drawing \(PDF\)](#)
[Product Specification PS-95043-001 \(PDF\)](#)
[Application Specification AS-95043-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)
[Product Literature \(PDF\)](#)

Agency Certification

CSA	LR19980
UL	E107635


General

Product Family	Modular Jacks/Plugs
Series	95043
Comments	Colored Boot Cable to Plug Tensile Strength: 98.0N
Component Type	Wire Plug
Magnetic	No
Overview	Magnetic and Modular Jacks and Plugs
Performance Category	5e
Power over Ethernet (PoE)	N/A
Product Literature Order No	987650-8441
Product Name	Modular Plug 8/8, RJ45
UPC	800754225984

Physical

Boot Color	Red
Color - Resin	Clear
Durability (mating cycles max)	750
Flammability	94V-2
Inverted / Top Latch	N/A
Jack Height	N/A
Lightpipes/LEDs	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polycarbonate
Net Weight	3.040/g
Orientation	N/A
PCB Locator	No
PCB Retention	None
Packaging Type	Bag
Pitch - Mating Interface	1.02mm
Plating min - Mating	1.270µm
Plating min - Termination	1.270µm
Ports	1
Positions / Loaded Contacts	8/8
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +60°C
Termination Interface: Style	IDT or Pierce
Waterproof / Dustproof	No
Wire/Cable Type	Round

Electrical

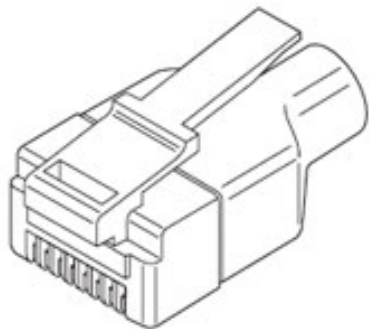

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/108/2014 (17 Dec
2014)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any
non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Reviewed

Search Parts in this Series

[95043](#) Series

Mates With

FCC 68 Jacks

Current - Maximum per Contact	1.5A
Grounding to Panel	N/A
Shielded	Yes
Voltage - Maximum	125V DC
Material Info	
Reference - Drawing Numbers	
Application Specification	AS-95043-001
Product Specification	PS-95043-001
Sales Drawing	SDA-95043

This document was generated on 02/12/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[95043-5894](#)