

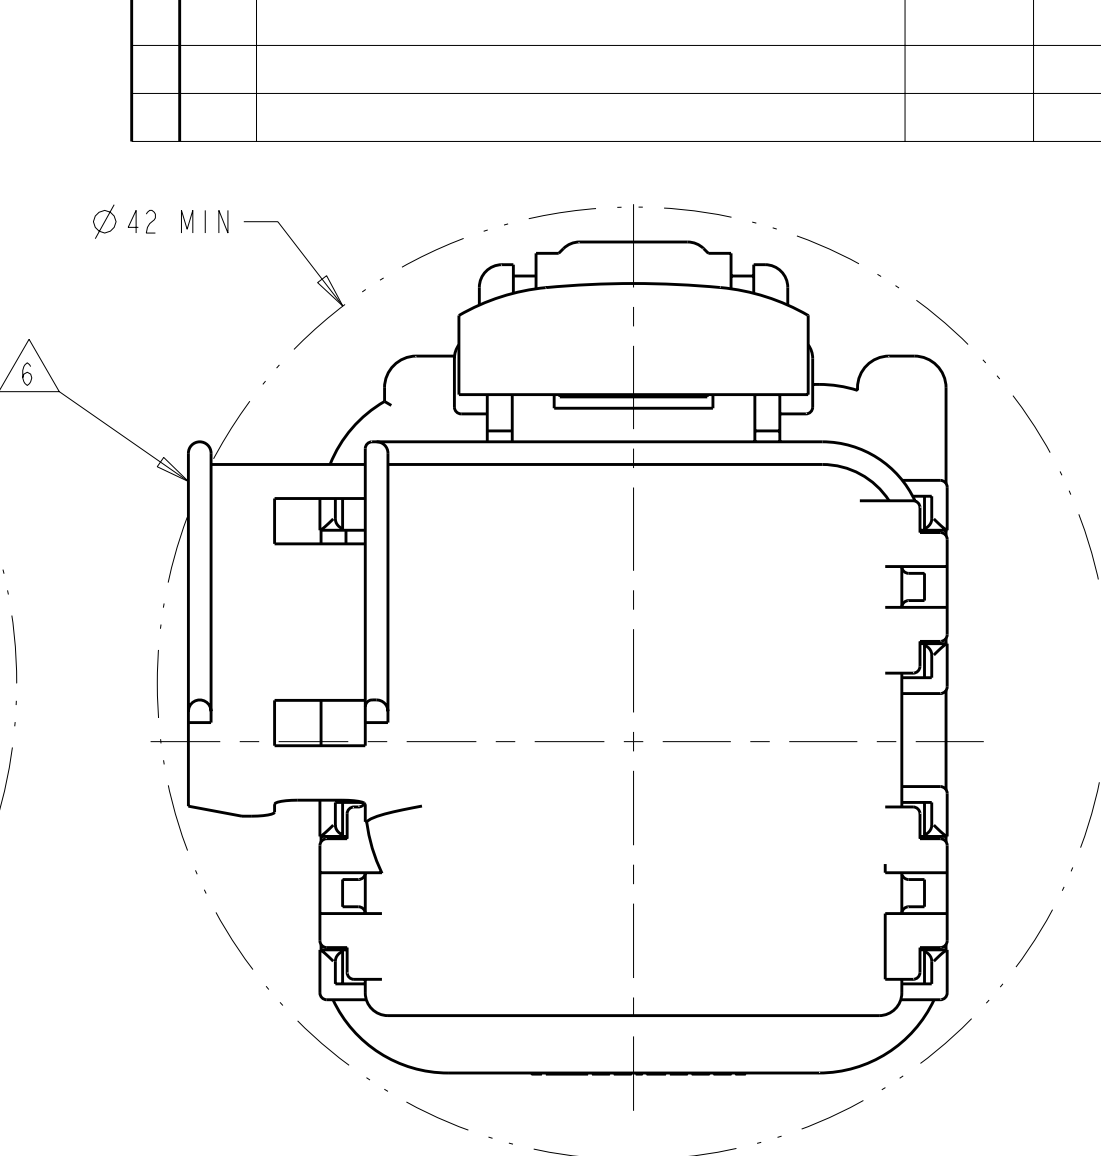


OPTION "F"

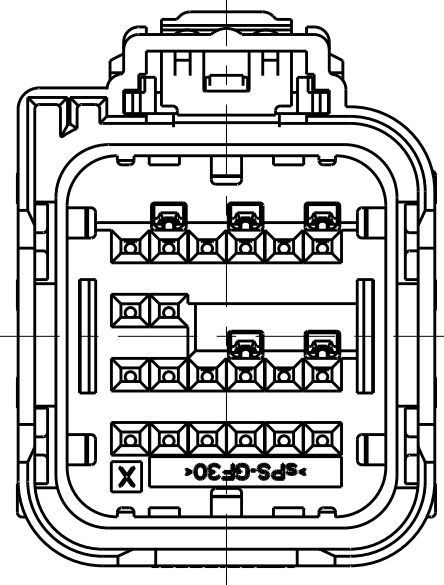

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

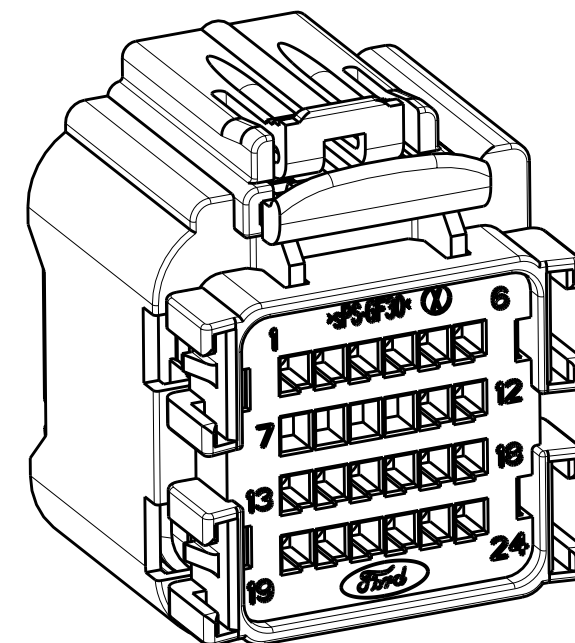

SCALE 2:1

[illegible]

QUANTITY

CPA	PBT-GF 15	RED
PERIMETER SEAL	SILICONE	GREEN
GROMMET	SILICONE	BROWN
SHORTING BAR	S.S.	SEE COMPONENT DRAWING
COVER	PA66 35% GF	BLACK
SPACER FOR SHORTING BAR APPLICATIONS	SPS 30% GF	NATURAL
PLUG WITH KEYING OPTION "D" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
PLUG WITH KEYING OPTION "C" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
PLUG WITH KEYING OPTION "B" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
PLUG WITH KEYING OPTION "A" AND 5 SHORTING BAR POSITIONS CONFIGURATION	PA66 35% GF	BLACK
DESCRIPTION	MATERIAL	FINISH/COLOR

THIS DRAWING IS A COMPUTER GENERATED FILE. THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION. IT IS TO BE USED FOR THE PART IDENTIFIED HEREON. IT IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF TYCO ELECTRONICS CORPORATION. ANY UNAUTHORIZED REPRODUCTION OR COPIING OF THIS DRAWING IS PROHIBITED. ANY VIOLATION OF THIS NOTICE SHALL BE CONSIDERED A VIOLATION OF THE APPLICABLE LAWS. ANY SUCH VIOLATION SHALL BE SUBJECT TO THE FULL ENFORCEMENT OF THE APPLICABLE LAWS.		DWN R. VESTAL 23JUL2007 CHK W. WELLINSKY 23JUL2007 APP'D W. WELLINSKY 23JUL2007		 Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±0.3 2 PLC ±0.10 3 PLC ±. 4 PLC ±. ANGLES ±°		NAME 24 WAY ARM PLUG ASSEMBLY WITH SHORTING BARS CUSTOMER SPEC.	
		PRODUCT SPEC APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A 00779 C=1924670	
MATERIAL SEE CHART ABOVE		WEIGHT SEE NOTE 5		RESTRICTED TO	
FINISH -		CUSTOMER DRAWING		SCALE 3:1 SHEET 1 OF 3 REV D	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1924670-6](#)