

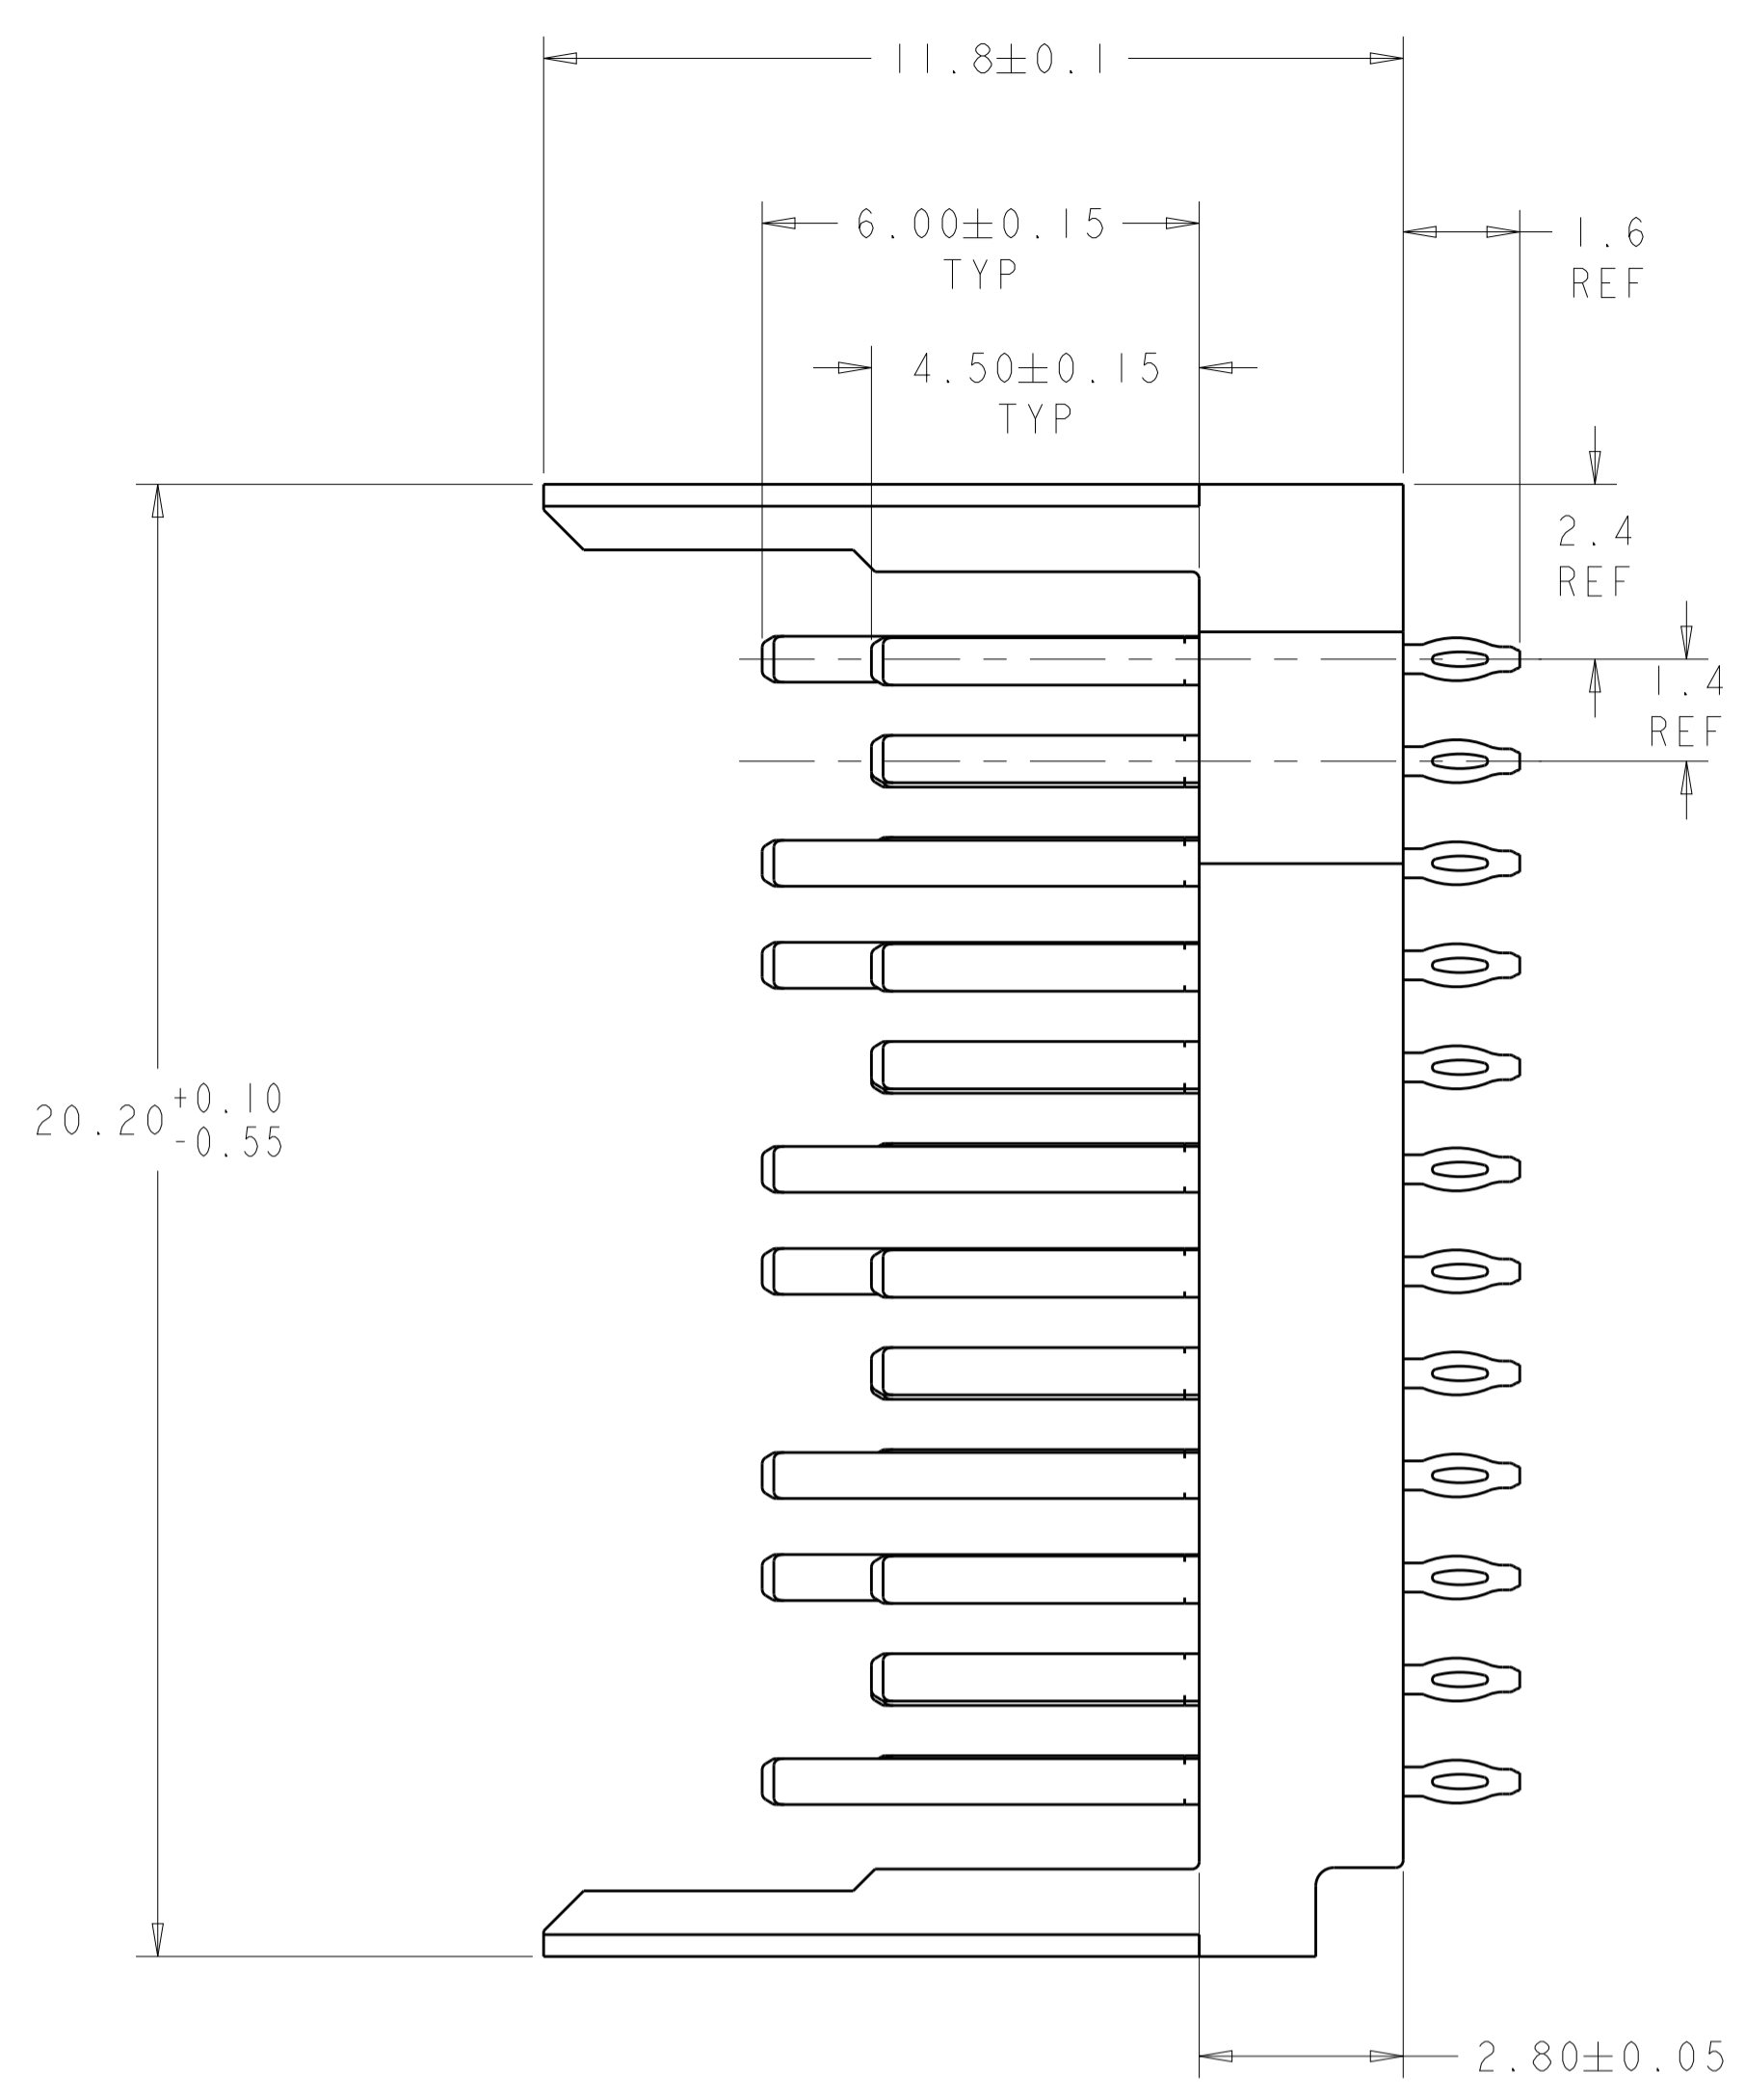
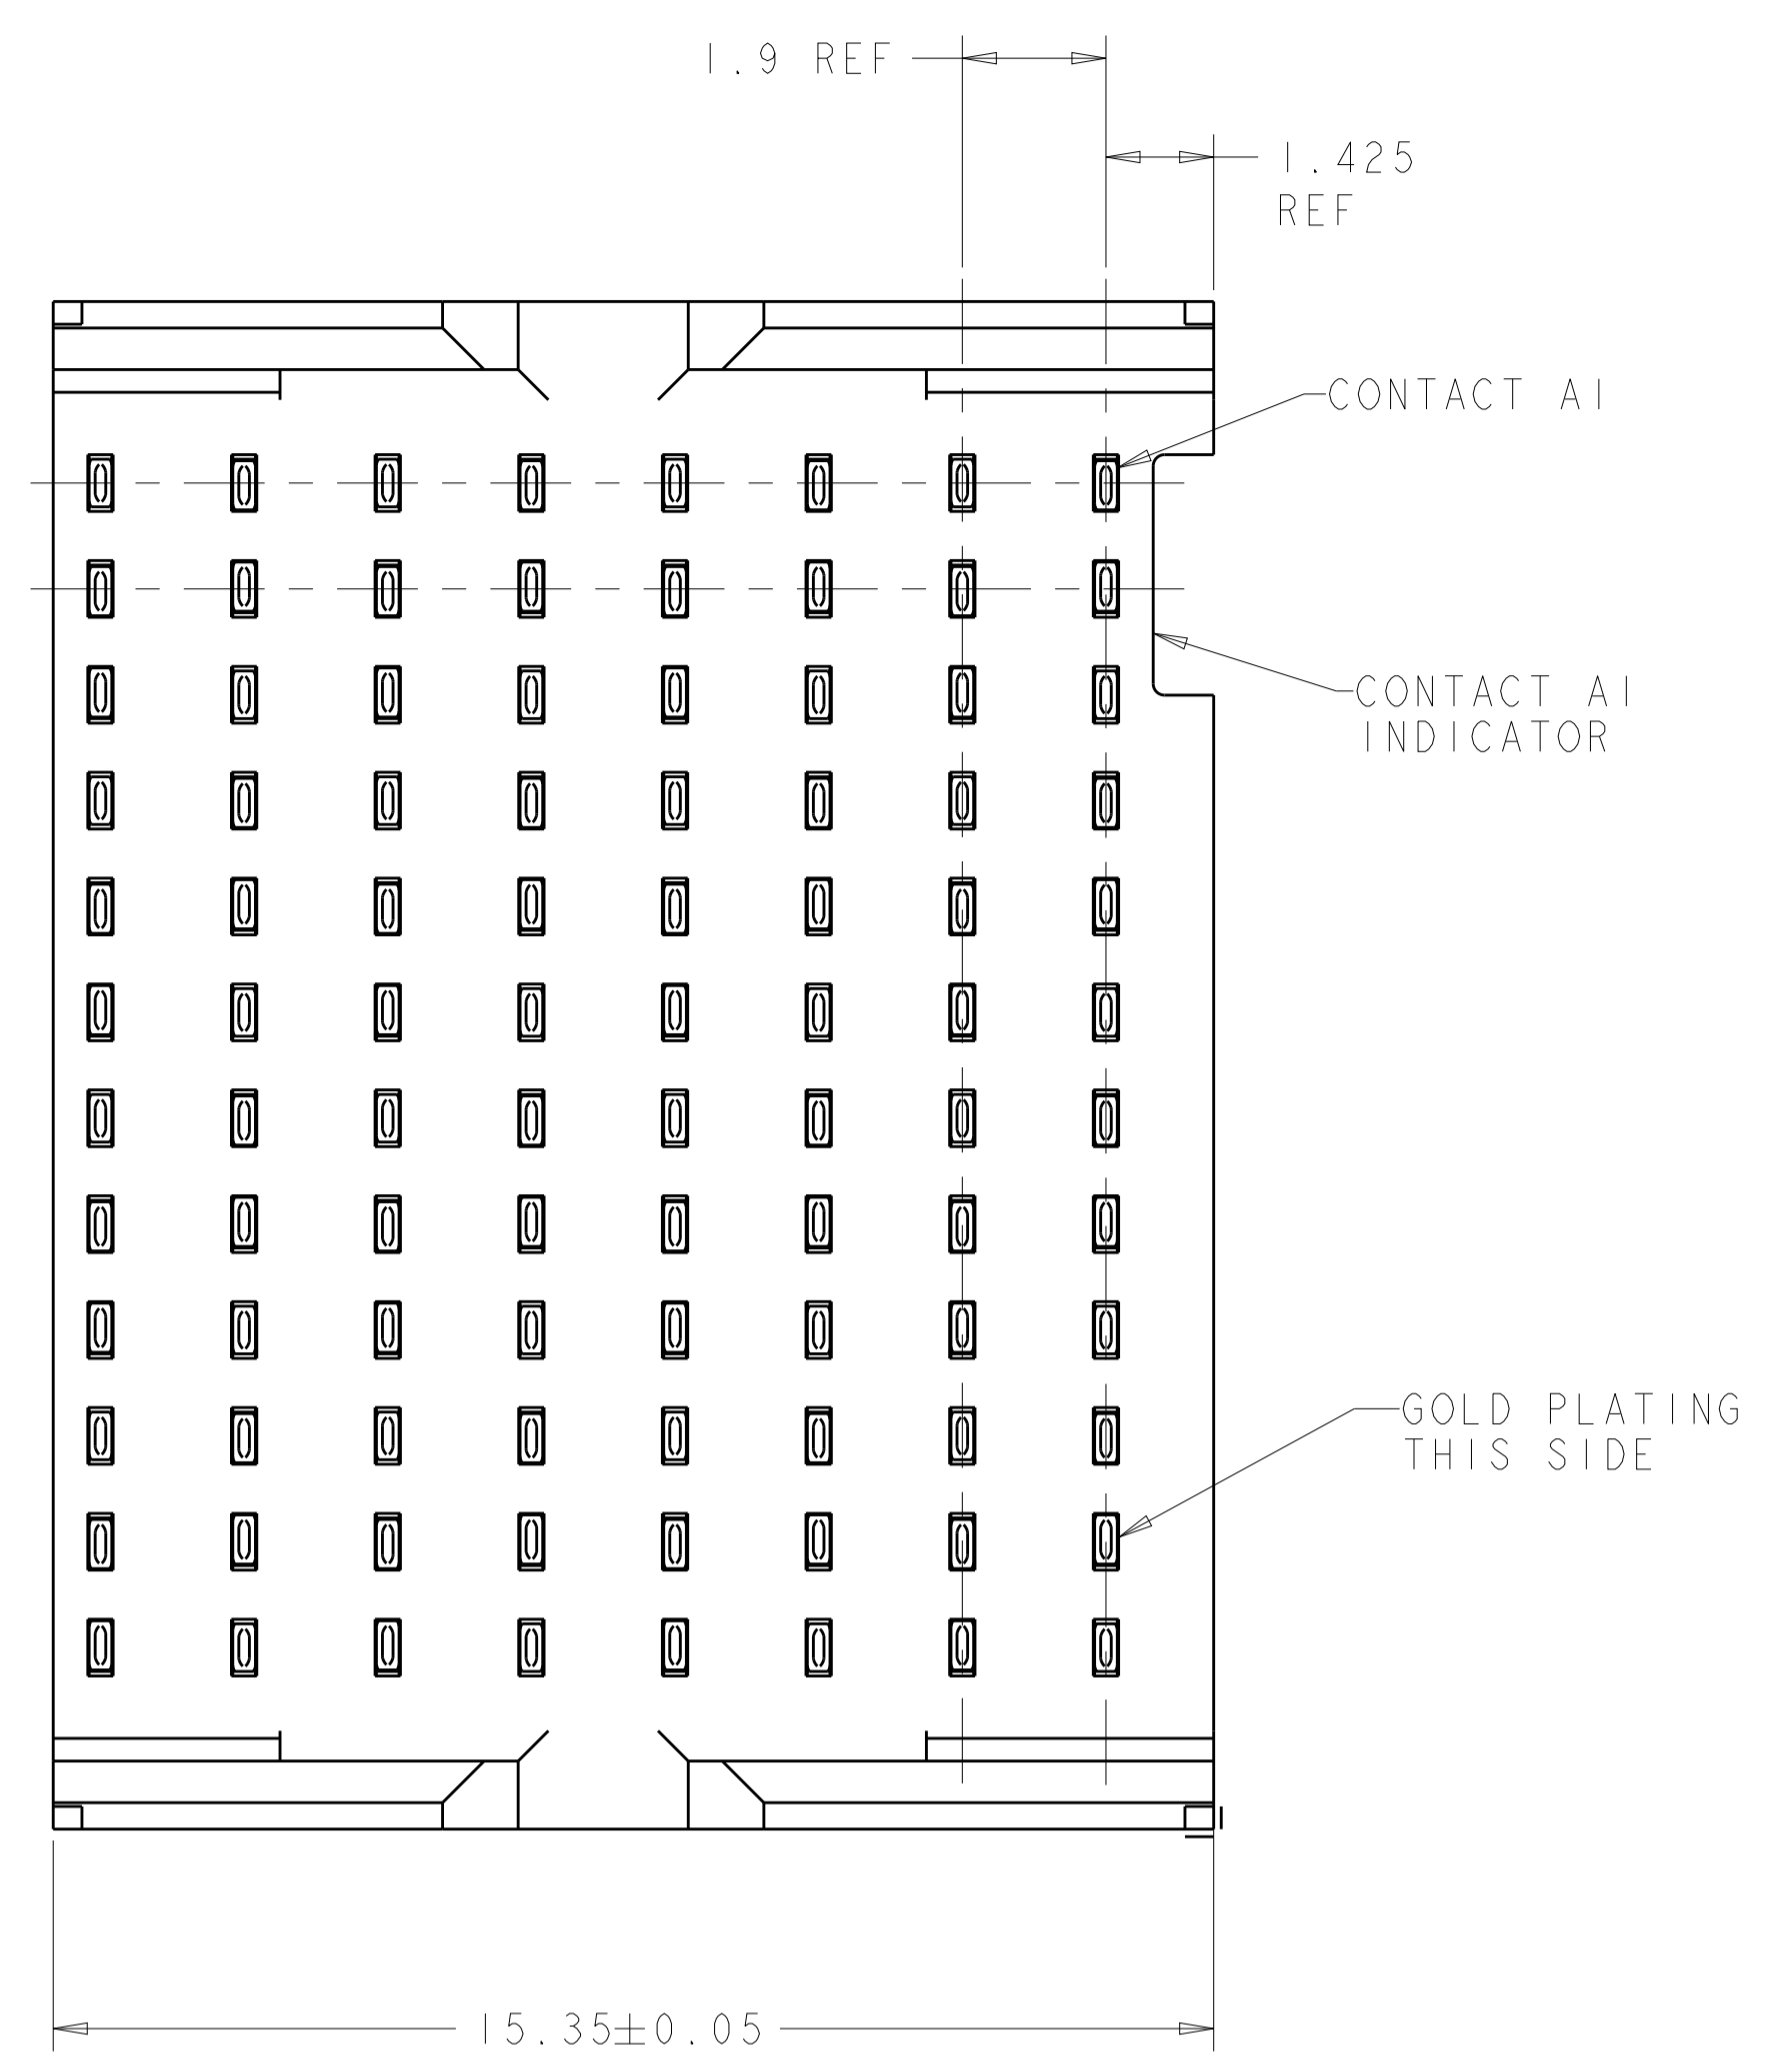


| LOC | | DIST | | REVISONS | | | |
|-----|----|------|-----|---------------------------|-----------|-----|------|
| GP | 00 | P | LTN | DESCRIPTION | DATE | DWN | APVD |
| | | F | | REVISED PER ECO-13-004536 | 19APR2013 | KH | RP |

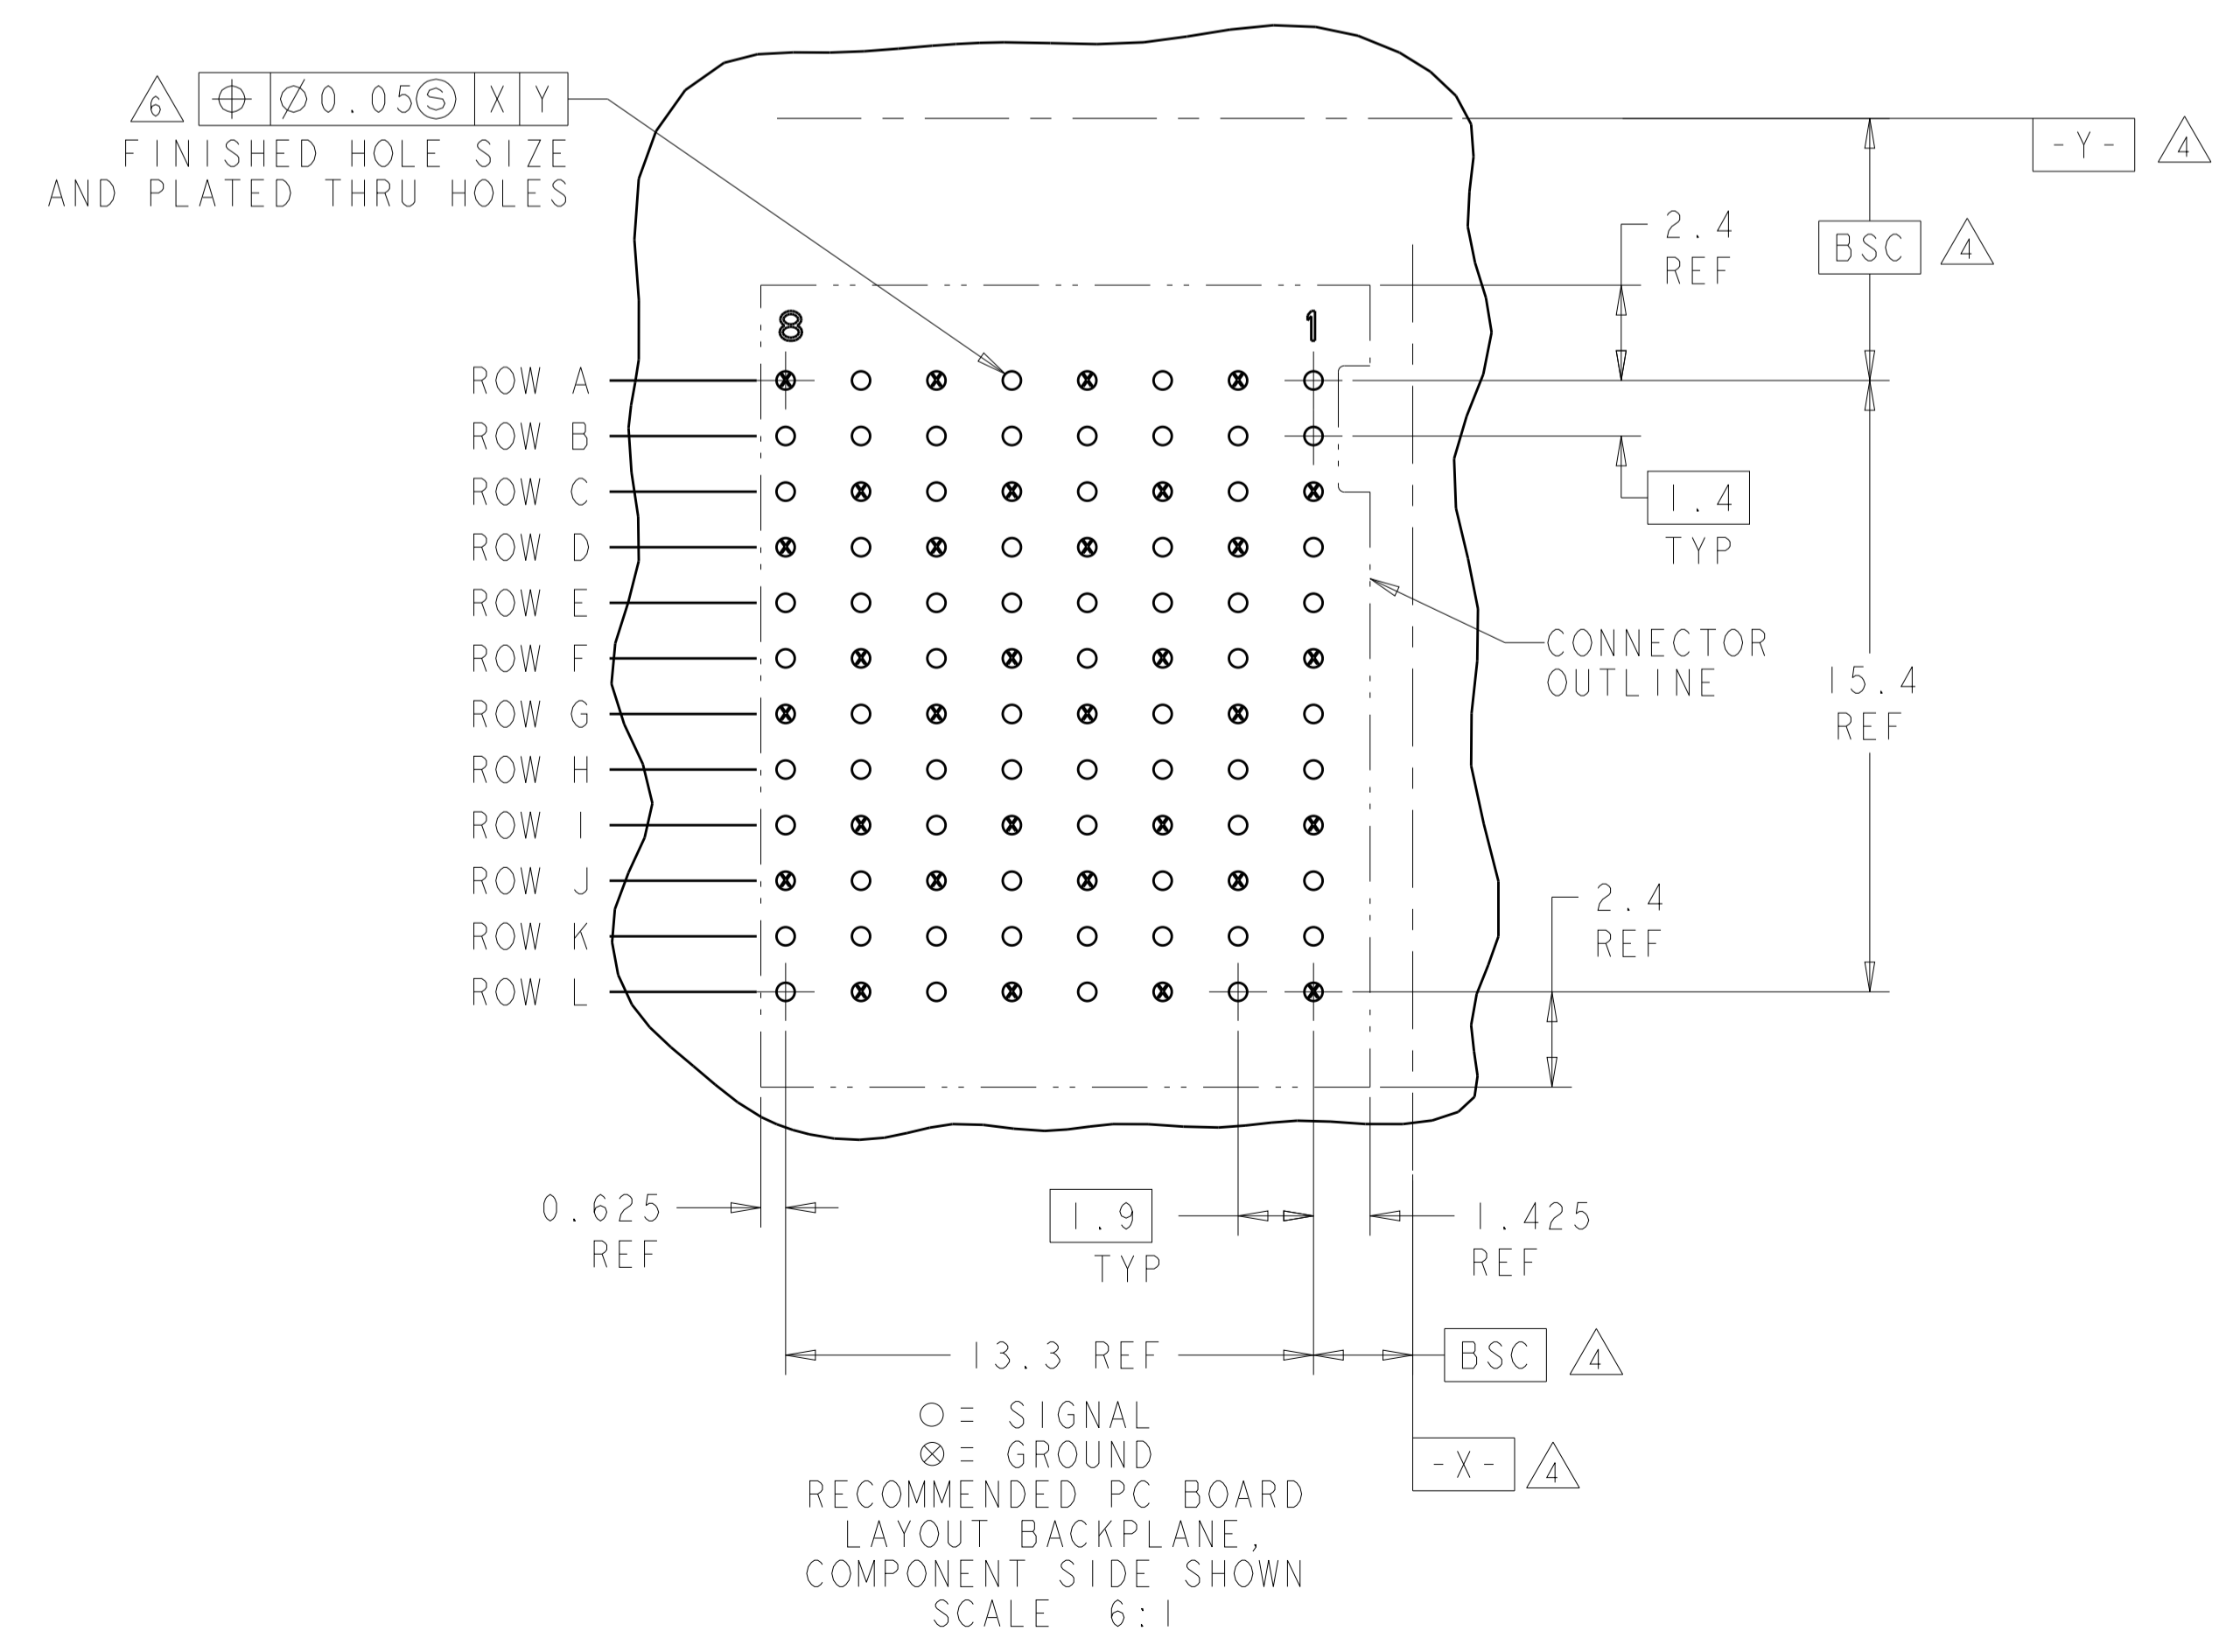

- △ MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- △ FINISH: 0.76 UM MIN GOLD OVER 1.27 NICKEL IN MATING AREA
- △ CONNECTOR MARKED WITH PART NUMBER, DATE CODE AND STANDARD IN APPROXIMATE AREA SHOWN
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- △ REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ FINISH: CONTACT
MATING AREA - 0.08μm MIN GOLD OVER 0.69μm MIN PD-NI OVER 1.27μm MIN NICKEL
COMPLIANT PIN AREA - 0.5μm MIN MATTE TIN OVER 1.27μm MIN NICKEL

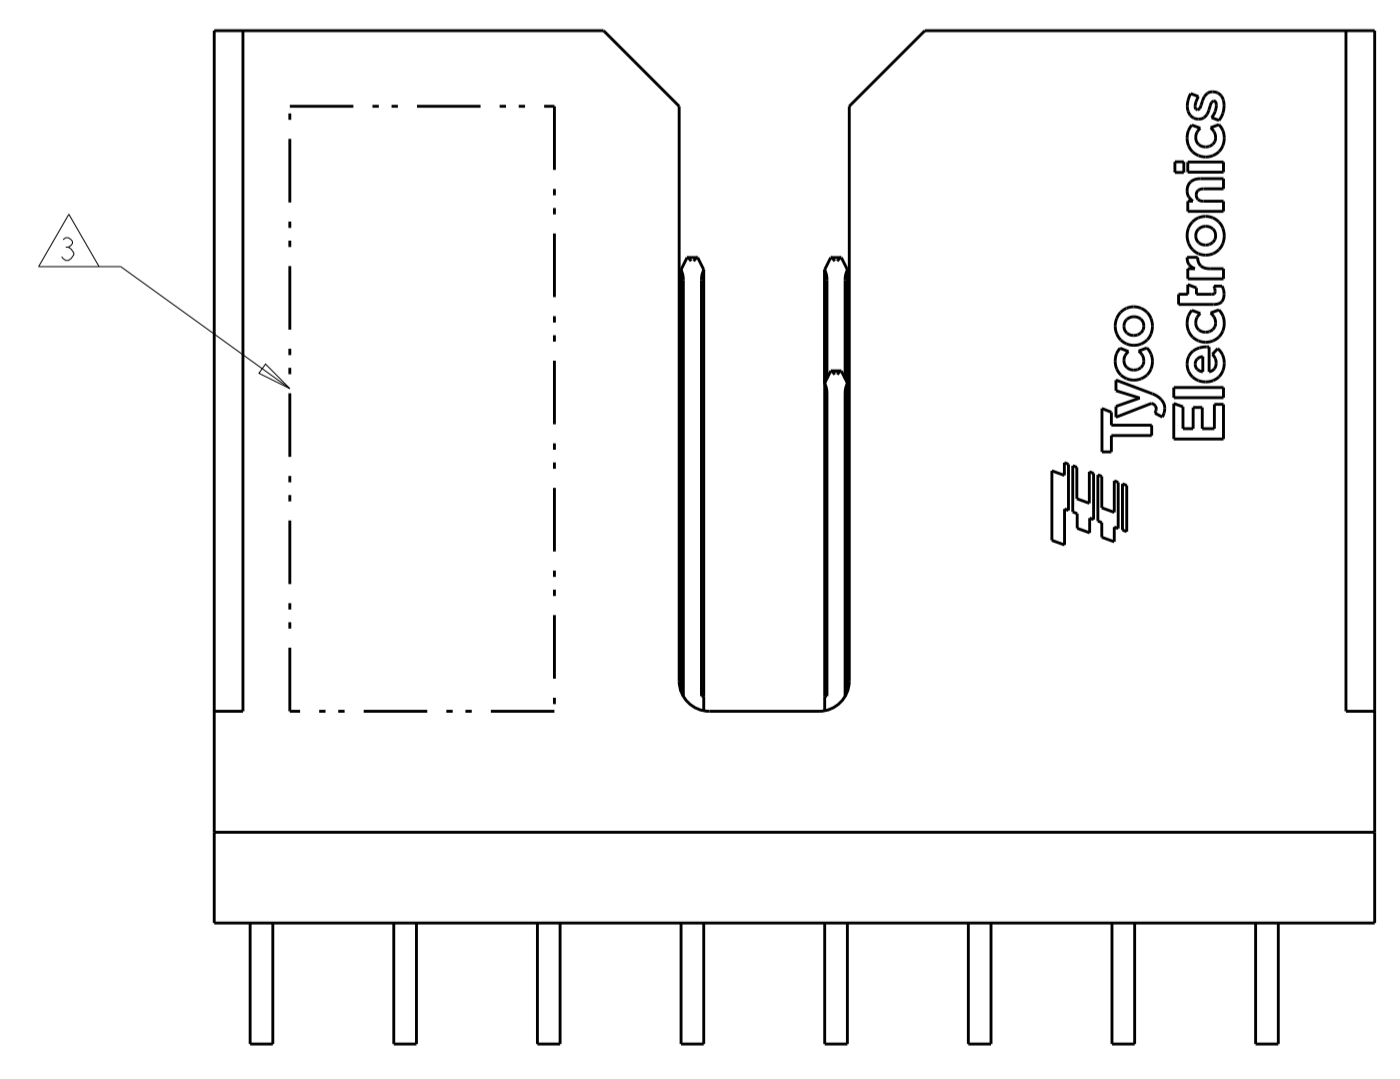

| | |
|--------|-------------|
| △ | 2065387-2 |
| △ | 2065387-1 |
| FINISH | PART NUMBER |

| | | | | |
|--|--|-----------------------------|---|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN B. CARBO 16SEP2008 | TE Connectivity | |
| DIMENSIONS: mm | | CHK R. PATTERSON 16SEP2008 | NAME: HEADER ASSEMBLY, OPEN ENDED, 4 PAIR 8 COLUMN TinMan | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: | | APVD R. PATTERSON 16SEP2008 | | |
| 0 PLC ± | | PRODUCT SPEC | SIZE: A1 00779 C=2065387 | |
| 1 PLC ± | | APPLICATION SPEC | RESTRICTED TO FUJ | |
| 2 PLC ± | | WEIGHT | SCALE 10:1 SHEET 1 OF 1 REV F | |
| 3 PLC ± | | Customer Drawing | | |
| 4 PLC ± | | | | |
| ANGLES ± | | | | |
| FINISH | | | | |

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2065387-1](#)