


SPECIFICATION CONTROL DRAWING

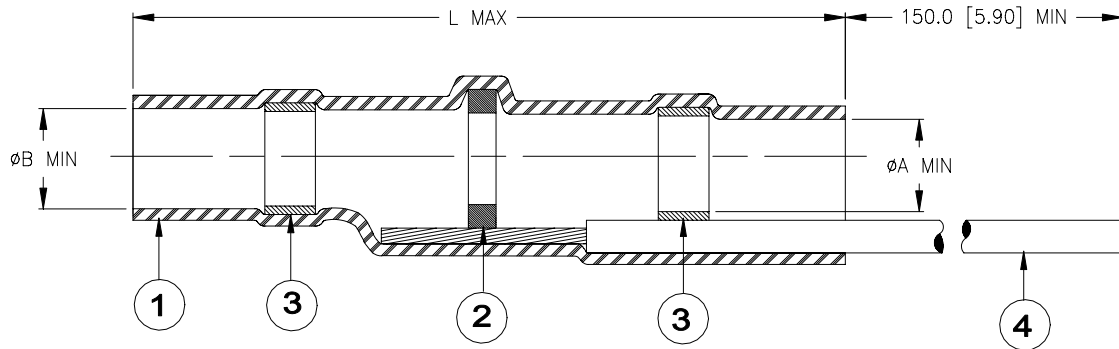

Product Revisions		Component Dimensions			Cable Dimensions					Qty: Item 2
Part Name		øA min	øB min	L max	øD max	øE min	øF min	øG max	J±0.5 [J±0.020]	
B-155-05-100-18-9	A	4.3 [0.169]	4.8 [0.189]	29.3 [1.154]	4.8 [0.189]	2.0 [0.079]	1.5 [0.059]	4.3 [0.169]	9.0 [0.354]	1
B-155-07-100-18-9	A	6.4 [0.250]	7.3 [0.290]	32.5 [1.280]	7.3 [0.290]	3.3 [0.130]	2.8 [0.110]	6.4 [0.250]	11.0 [0.435]	1
B-155-11-100-18-9	A	10.0 [0.395]	11.5 [0.450]	35.5 [1.395]	11.5 [0.450]	4.5 [0.175]	4.0 [0.155]	10.0 [0.395]	13.0 [0.510]	2
B-155-13-100-18-9	A	13.0 [0.510]	15.1 [0.595]	45.5 [1.790]	15.1 [0.595]	7.0 [0.275]	6.5 [0.255]	13.0 [0.510]	17.0 [0.670]	3
B-155-17-100-18-9	A	16.5 [0.650]	19.0 [0.750]	55.0 [2.165]	18.0 [0.710]	9.0 [0.355]	8.0 [0.315]	16.0 [0.630]	23.0 [0.905]	2


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent clear, radiation cross-linked modified polyolefin.
- SOLDER PREFORM WITH FLUX Qty: see table (one solder washer shown).
 SOLDER: TYPE Sn42Bi58 per ANSI / J-STD-006.
 FLUX: TYPE ROM1 per ANSI / J-STD-004.
- MELTABLE SEALING RINGS: Thermally stabilized thermoplastic.
- GROUND LEAD: Tyco Electronics / Raychem Zerohal 100G0111-18-9 (AWG18), stranded tin-plated copper. Color: white.

APPLICATION

- These controlled soldering devices are designed for termination of a bare or tin-plated copper shield on a cable having an insulation rated for at least +85°C, and meeting the dimensional criteria listed in the table above.
- Temperature range: -55°C to +125°C.
- When installed properly, it will meet the performance requirements of Tyco Electronics / Raychem Specification RT-1404.
- For installation procedure and application equipment, consult RPIP-688-01.

For best results, prepare the cable as shown:

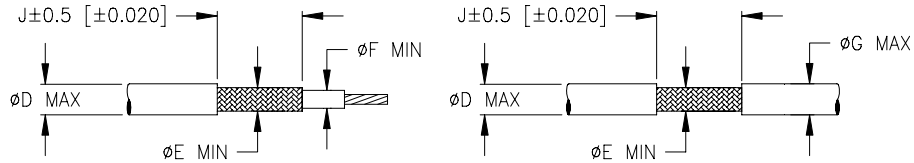

		Tyco Electronics Corporation 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.				TITLE: SOLDERSLEEVE SHIELD TERMINATOR, LEAD-FREE LOW-FIRE-HAZARD WITH PRE-INSTALLED LEAD						
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]						DOCUMENT NO.: B-155-XX-100-18-9						
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		PROD. REV.: SEE TABLE		DOC. ISSUE: 1		DATE: 30-Jun-05		
PREPARED BY: mforonda		DCR NUMBER: D050173		REPLACES: ---		CAGE CODE : 06090		SCALE: ---		SIZE: A		SHEET: 1 of 1

© 2005 Tyco Electronics Corporation. All rights reserved.
 If this document is printed it becomes uncontrolled. Check for the latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B-155-07-100-18-9](#) [B-155-11-100-18-9](#) [B-155-05-100-18-9](#)