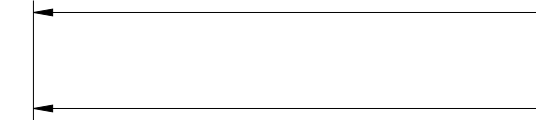



NOTES:
1. MATERIALS AND FINISHES: BODIES & CAP - STAINLESS STEEL, GOLD PLATING CONTACT - BeCu, GOLD PLATING INSULATOR - PTFE, NATURAL

- | | |
|---|--|
| INSULATOR - PIPE, NATURAL
COUPLING NUT - STAINLESS STEEL, PASSIVATED
GASKET - SILICONE RUBBER, RED
RETAINING RING - BeCu | |
| 2. ELECTRICAL:
A. IMPEDANCE: 50 OHM |  |
| 3. MECHANICAL:
A. DURABILITY: 500 CYCLES MIN.
B. TEMPERATURE RANGE: -65° C TO +165° C | |
| 4. PACKAGING:
A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL RF, 901-9221-2ASF, AND DATE CODE" | |
| 5. CABLE ASSEMBLY INSTRUCTIONS:
A. CABLE ASSEMBLY INSTRUCTIONS PER 349-50180, SHEET 19. | |


6 SHOWS CABLE ENTRY DIMENSIONS.

THIRD ANGLE PROJ. 

REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR
--	RELEASE TO MFG.	--	--	
G	REDRAWN IN PRO-E & COD SHEET ADDED	6/18/15	50333	AAP

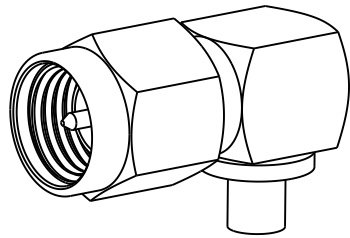

SCALE 2.500

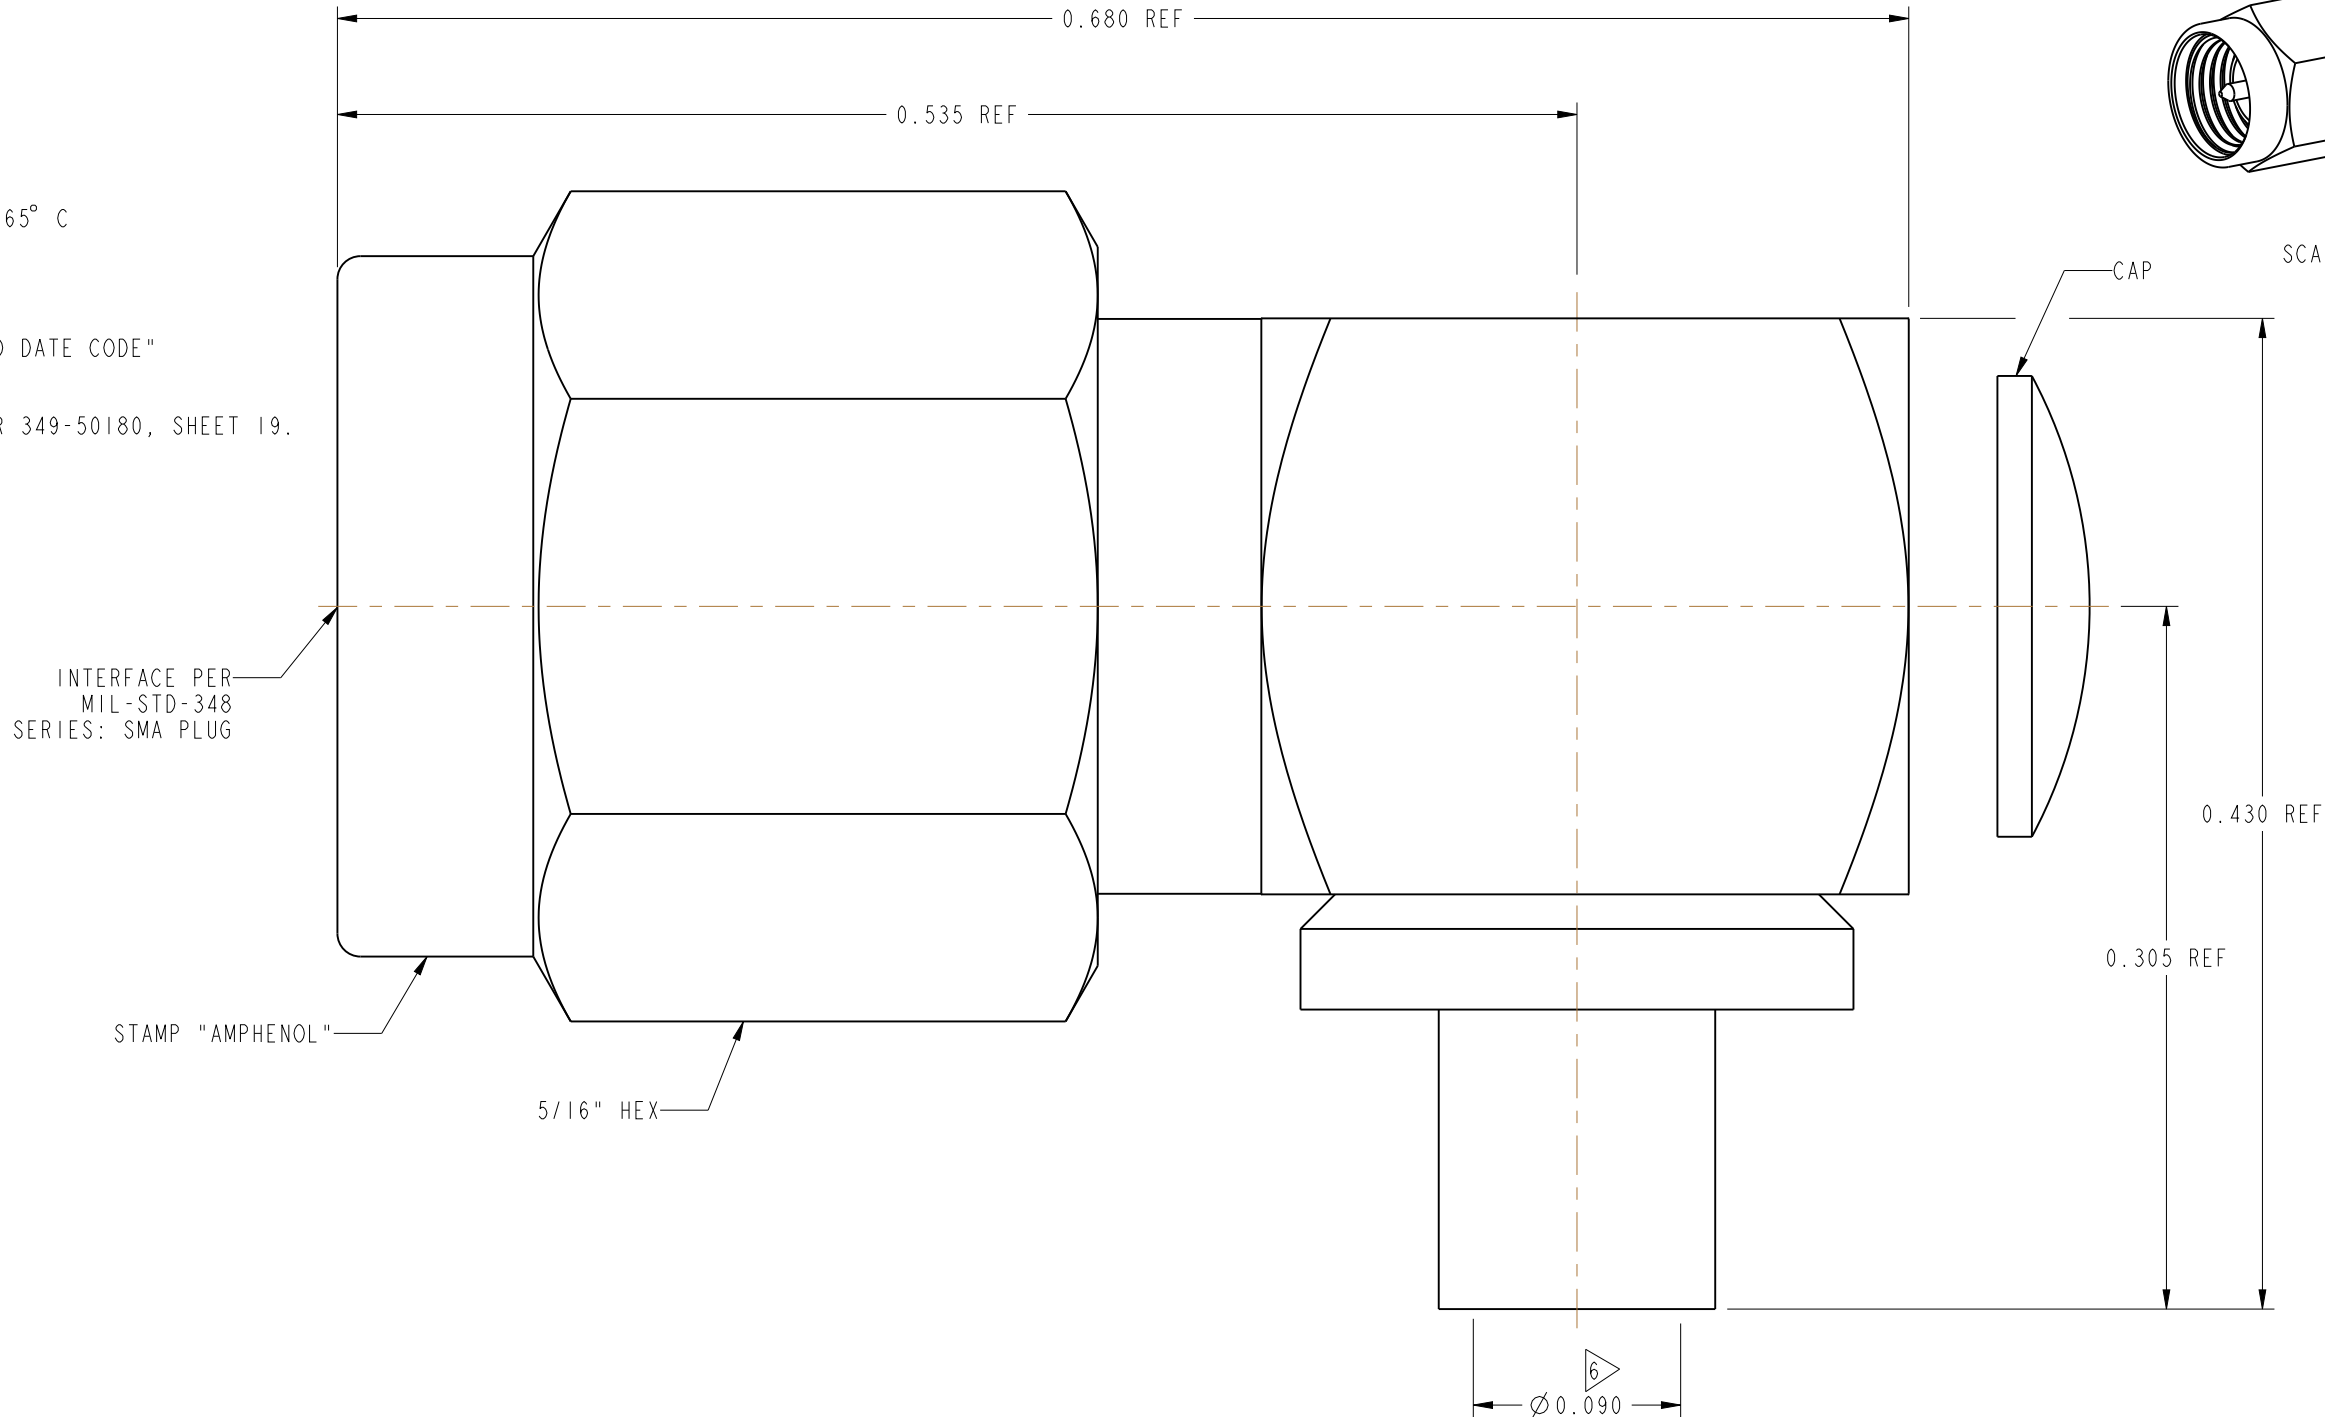

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL 3 PLACE DECIMAL ANGLES $\pm .015$ (0,381 mm) $\pm .005$ (0,127 mm) $\pm 1^\circ$	MATERIAL SEE NOTES	DRAWN A ARUN PRABU	DATE 02-Jan-15	TITLE SMA RA PLUG FOR 0.086" SEMI-RIGID CABLE		Amphenol RF www.amphenolrf.com	
		ENGINEER H.HUTTER	DATE 02-Feb-77			DRAWING NO.901-9221-2ASF	
	REFERENCE EAR # DOR 42-901-315597	APPROVED K. CAPOZZI	DATE 6/18/15	SCALE: 12.0:1.0	SHEET	2 OF 2	
	CONFIGURATION LEVEL: In Work	CAD FILE	DWG SIZE B		REV G	ITEM NO.901-9221-2ASF	
FINISH						PART NO.901-9221-2ASF	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[901-9221-2ASF](#)