

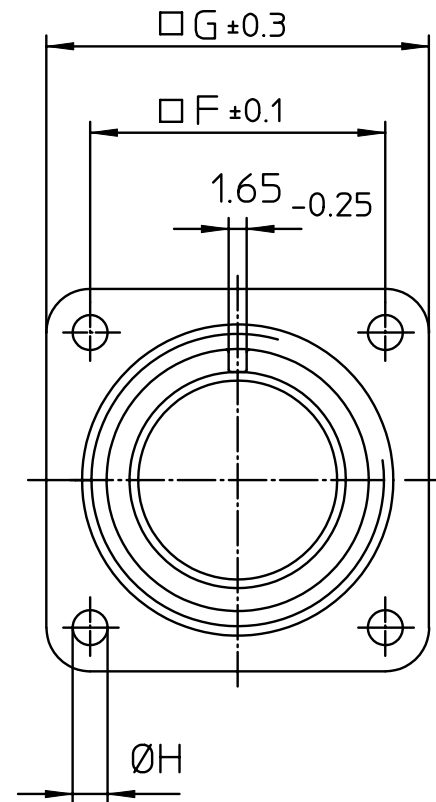


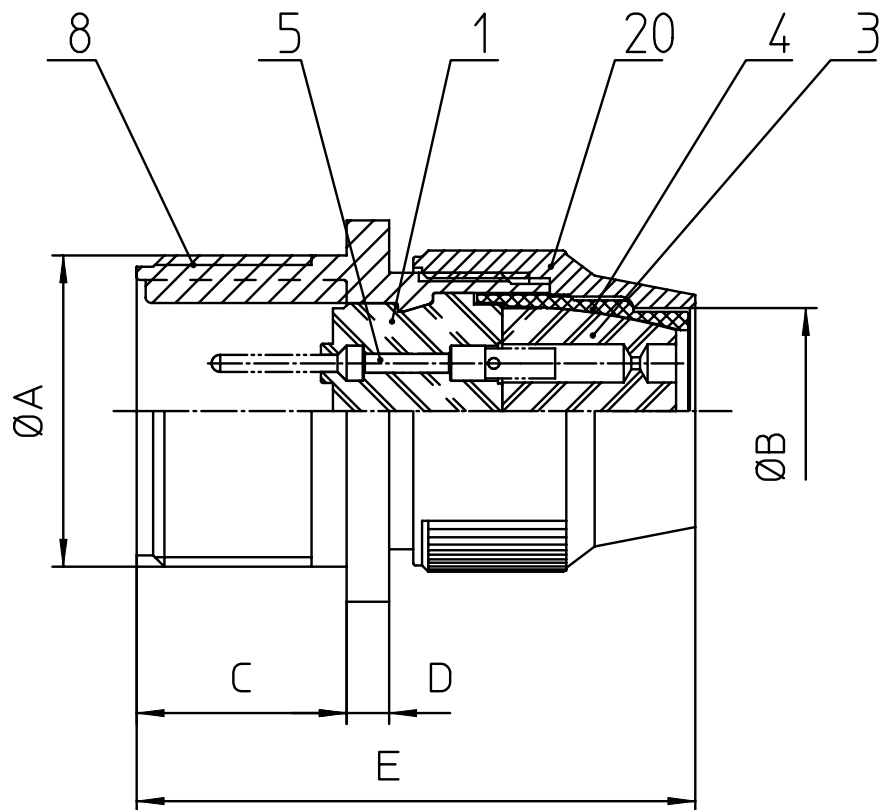

| NO. | MASSE / DIMENSION |
|-----|-------------------|
| A   | 1-20UNE-2A        |
| B   | 15.4              |
| C   | 19                |
| D   | 2                 |
| E   | 50                |
| F   | 24.6              |
| G   | 32.5              |
| H   | 3.1               |

| NO. | BESCHREIBUNG / DESCRIPTION          |
|-----|-------------------------------------|
| 1   | ISOLIERKÖRPER STIFT / INSULATOR PIN |
| 3   | DICHTKÖRPER / GROMMET               |
| 4   | ENDRING / ENDRING                   |
| 5   | KONTAKTSTIFT / CONTACT PIN          |
| 8   | DOSENGEHÄUSE / SHELL                |
| 20  | KURZES ENDGEHÄUSE / SHORT ENDBELL   |



Note: Due to an automatic nomenclature system, numbers generated may not be sequential.

Specification and Dimensions subject to change  
Drawings illustrate normal insulator positioning

#### Material Specification:

|                     |                                                  |
|---------------------|--------------------------------------------------|
| Shell Material:     | Aluminium alloy                                  |
| Shell Plating:      | Olive drab chromate coating over cadmium plating |
| Insulator Material: | Neoprene                                         |
| Contact Material:   | Copper alloy                                     |
| Contact Plating:    | Hard silver                                      |

all dimensions are in mm  
Dimensions without tolerance indications are general tolerances in acc. with DIN7168m

drawing for  
CUSTOMER



description  
**CA3100R16-9P**  
Wall mounting receptacle  
Shortened light-weight endbell without cable clamp  
Solder Cup / Pin / Layout: 16-9

© All rights reserved. Reproduction or issue to third in any form  
whenever is only permitted with written authorization of ITT Cannon



page  
1/1

revision  
969 9. Apr 20