

Input Specifications

Input Voltage	- AC Range	85 - 264 VAC
	- DC Range	120 - 370 VDC (Designed for, no certification)
Input Frequency		47 - 440 Hz
Input Current	- Full Load & Vin = 230 VAC	5 VDC model: 430 mA max.
		12 VDC model: 415 mA max.
		15 VDC model: 410 mA max.
		24 VDC model: 415 mA max.
		12 / -12 VDC model: 415 mA max.
	- Full Load & Vin = 115 VAC	15 / -15 VDC model: 410 mA max.
		5 VDC model: 720 mA max.
		12 VDC model: 690 mA max.
		15 VDC model: 680 mA max.
		24 VDC model: 690 mA max.
		12 / -12 VDC model: 690 mA max.
		15 / -15 VDC model: 680 mA max.
Power Consumption	- At no load	300 mW max. (Ready to meet ErP directive)
Input Inrush Current	- at 230 VAC	60 A max.
	- at 115 VAC	30 A max.
Recommended Input Fuse		3000 mA (slow blow)
Input Protection		T 2 A / 250 VAC (Internal Fuse in L & N)

Output Specifications

Voltage Set Accuracy		±2% max.
Regulation	- Input Variation (Vmin - Vmax)	single output models: 0.5% max.
		single output models: 1% max.
	- Load Variation (0 - 100%)	dual output models: 2% max. (Output 1)
		2% max. (Output 2)
Ripple and Noise (20 MHz Bandwidth)	- single output	5 VDC model: 90 mVp-p max.
		12 VDC model: 155 mVp-p max.
		15 VDC model: 195 mVp-p max.
		24 VDC model: 310 mVp-p max.
	- dual output	12 / -12 VDC model: 155 / 155 mVp-p max.
		15 / -15 VDC model: 195 / 195 mVp-p max.
	- single output	5 VDC model: 80 mVp-p typ.
		12 VDC model: 120 mVp-p typ.
		15 VDC model: 150 mVp-p typ.
		24 VDC model: 240 mVp-p typ.
	- dual output	12 / -12 VDC model: 120 / 120 mVp-p typ.
		15 / -15 VDC model: 150 / 150 mVp-p typ.
Capacitive Load	- single output	5 VDC model: 8'000 µF max.
		12 VDC model: 3'900 µF max.
		15 VDC model: 3'900 µF max.
		24 VDC model: 680 µF max.
	- dual output	12 / -12 VDC model: 1'500 / 1'500 µF max.
		15 / -15 VDC model: 1'000 / 1'000 µF max.
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Hold-up Time	- at 230 VAC	50 ms min.
	- at 115 VAC	10 ms min.
Start-up Overshoot Voltage		5% max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		105% min. of Iout max.
Overvoltage Protection		120% typ. of Vout nom. (By Zener diode)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Safety Specifications

Safety Standards	- IT / Multimedia Equipment - Industrial Control Equipment - Medical Equipment - Certification Documents	IEC 60950-1 EN 60950-1 UL 60950-1 UL 508 EN 60601-1 IEC 60601-1 ANSI/AAMI ES 60601-1 CSA-C22.2, No 60601-1 2 x MOPP (Means Of Patient Protection) www.tracopower.com/overview/tmm40
Protection Class		Class II (Prepared): Reinforced Insulation
Pollution Degree		PD 2
Over Voltage Category		OVC II

EMC Specifications

EMI Emissions	- Conducted Emissions - Radiated Emissions	EN 61000-6-3 (Generic Residential) EN 61000-6-4 (Generic Industrial) EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC Part 15, class B EN 55011 class B (internal filter) EN 55032 class B (internal filter) FCC Part 15, class B
EMS Immunity	- Electrostatic Discharge - RF Electromagnetic Field - EFT (Burst) / Surge - Conducted RF Disturbances - PF Magnetic Field - Voltage Dips & Interruptions	EN 55024 (IT Equipment) EN 61000-6-1 (Generic Residential) EN 61000-6-2 (Generic Industrial) EN 60601-1-2 edition 4 (Medical Devices) Air: EN 61000-4-2, ± 15 kV, perf. criteria A Contact: EN 61000-4-2, ± 8 kV, perf. criteria A EN 61000-4-3, 10 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria A L to L: EN 61000-4-5, ± 1 kV, perf. criteria A EN 61000-4-6, 10 Vrms, perf. criteria A Continuous: EN 61000-4-8, 30 A/m, perf. criteria A 230 VAC / 50 Hz: 30%, 25 periods, perf. criteria A >95%, 0.5 periods, perf. criteria A >95%, 1 period, perf. criteria A >95%, 250 periods, perf. criteria B

General Specifications

Relative Humidity		95% max. (non condensing)
Temperature Ranges	- Operating Temperature - Storage Temperature	-40°C to +80°C -40°C to +95°C
Power Derating	- High Temperature	3.75 %/K above 60°C
Over Temperature	- Protection Mode	142°C typ. (Automatic recovery at 67°C)
Protection Switch Off	- Measurement Point	Internal IC temperature
Cooling System		Natural convection (20 LFM)
Altitude During Operation		5'000 m max.
Switching Frequency		130 kHz typ. (PWM)
Insulation System		Reinforced Insulation
Working Voltage (rated)		240 VAC
Isolation Test Voltage	- Input to Output, 60 s	4'000 VAC
Isolation Resistance	- Input to Output, 500 VDC	1'000 MOhm min.
Leakage Current	- Touch Current	100 μ A max.
Reliability	- Calculated MTBF	200'000 h (MIL-HDBK-217F, ground benign)

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.



Housing Material	Plastic resin (UL 94 V-0 rated)
Pin Material	Copper alloy w. gold plate over nickel subplate
Soldering Profile	Wave Soldering (1.5mm from casing) 260°C / 10 s
Connection Type	THD (Through-Hole Device)
Weight	310 g
Environmental Compliance	- Reach - RoHS www.tracopower.com/info/reach-declaration.pdf www.tracopower.com/info/rohs-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/tmm40

Outline Dimensions

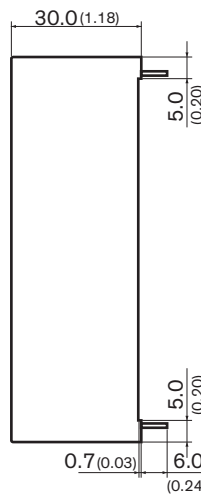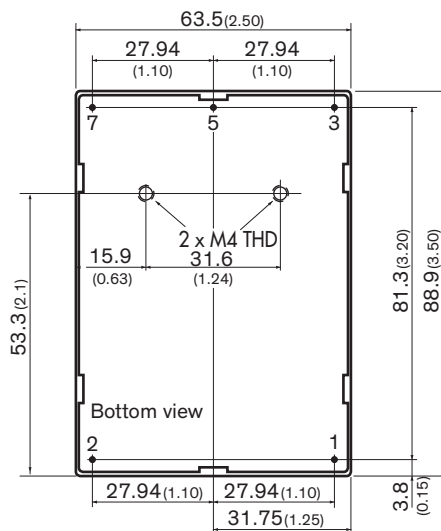

Dimensions in mm (inch)
Tolerances ± 0.5 (± 0.02)
Pin $\varnothing$ 1.0 ± 0.1 (0.04 ± 0.004)
Pin pitch tolerances ± 0.25 (± 0.01)

Pinout

Pin	Single Output	Dual Output
1	AC (N)	AC (N)
2	AC (L)	AC (L)
3	+Vout	+Vout
5	-Vout	Common
7	NC	-Vout

NC: Not connected