
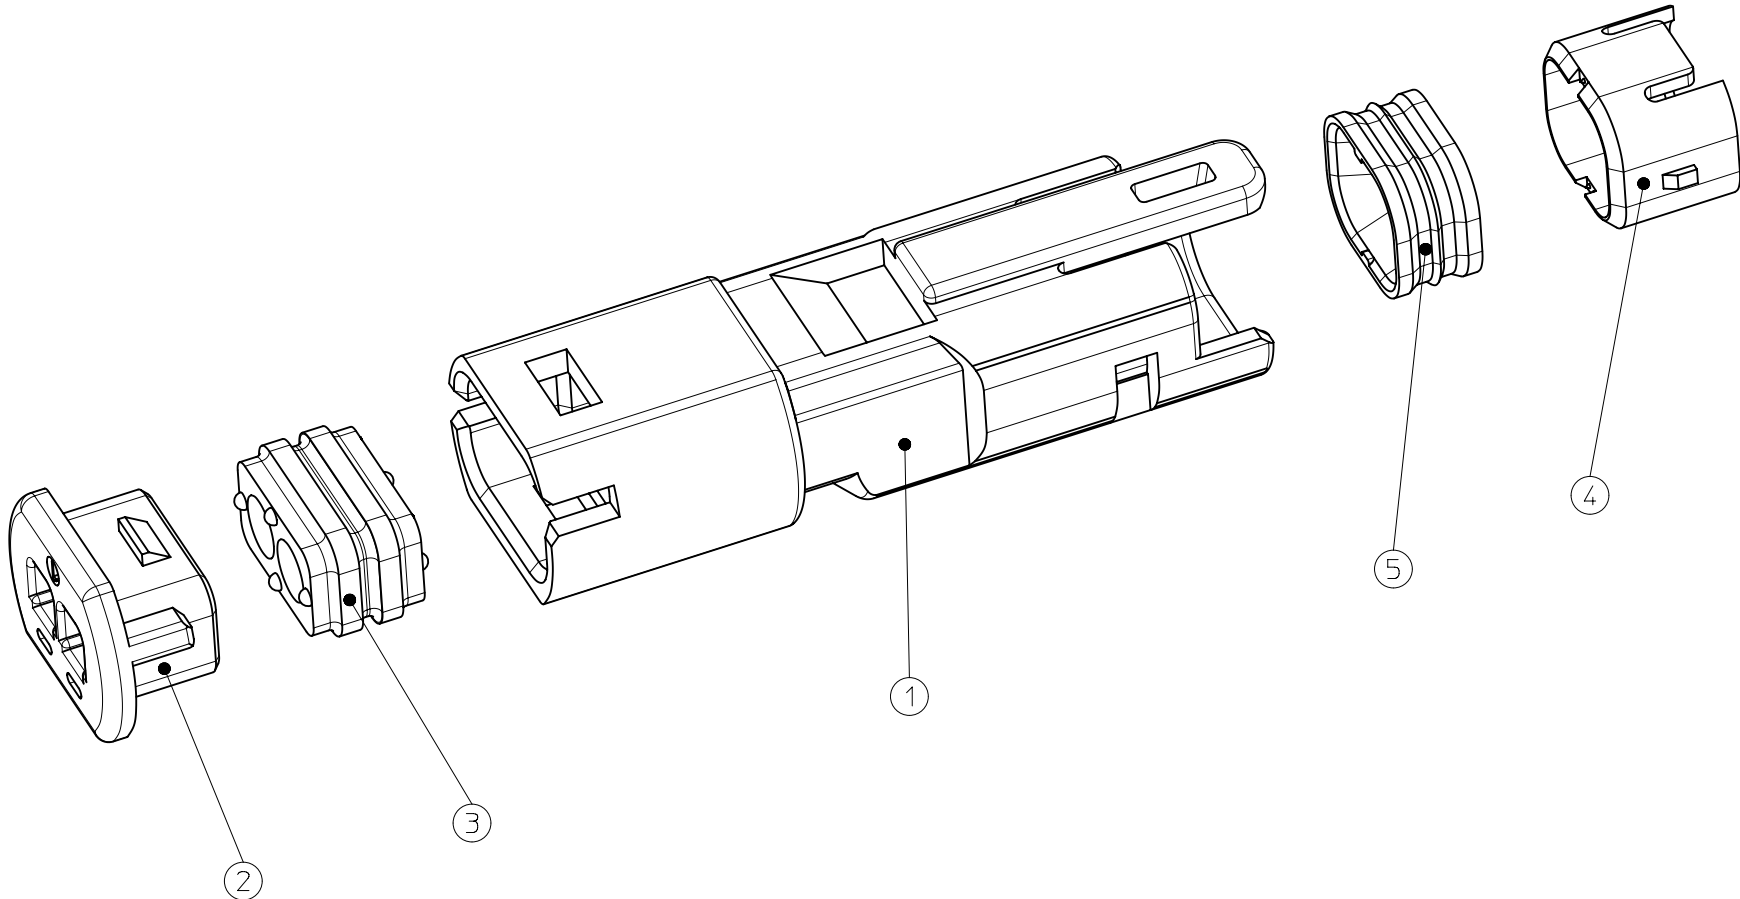


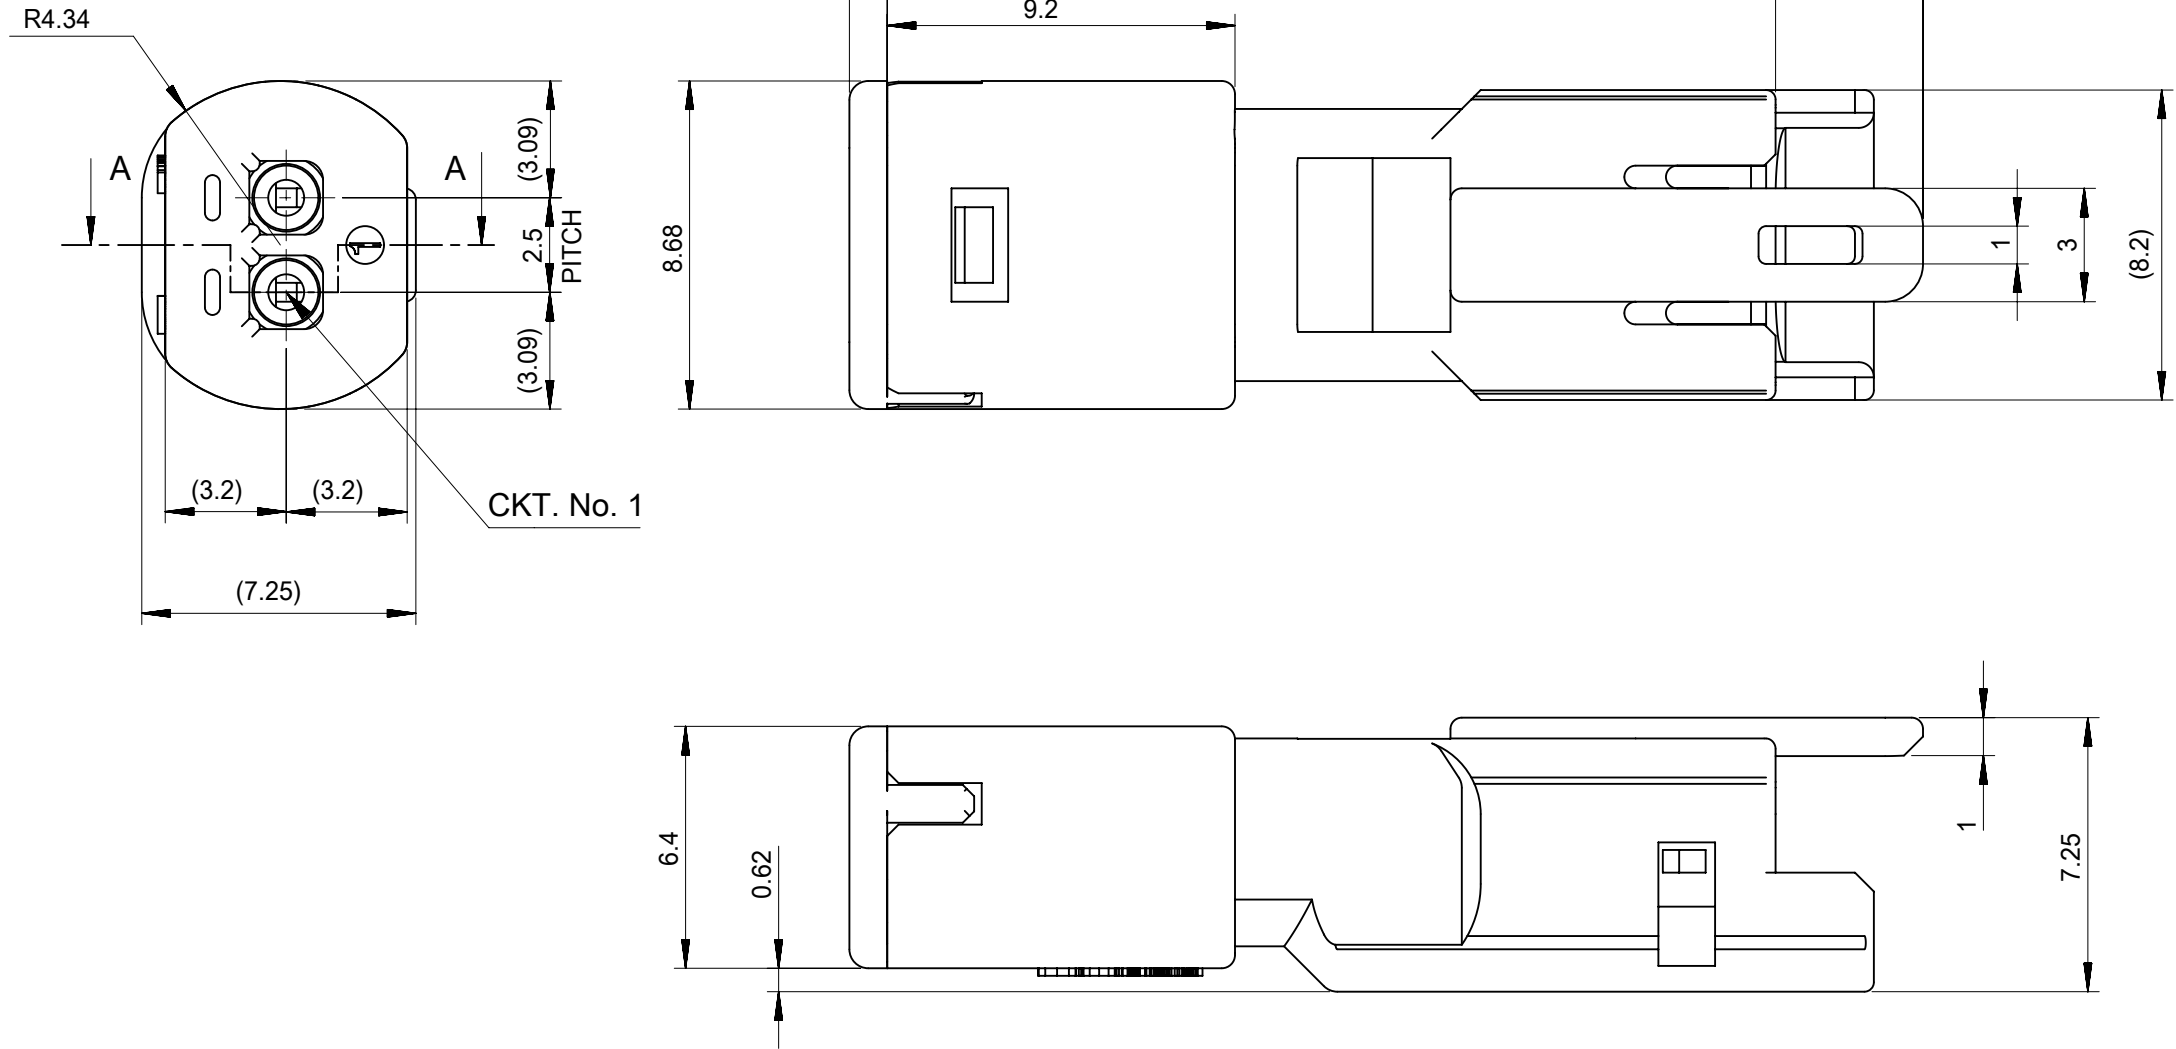

- NOTES:
1. MATERIAL SEE CHART
 2. GENERAL TOLERANCE PER AS BELOW:
UNDER 10: ± 0.2
OVER 10, UNDER 30: ± 0.25
OVER 30: ± 0.3
ANGLE: $\pm 3^\circ$
 3. PRODUCT SPECIFICATION: PS-52213-003
 4. PACKAGING SPECIFICATION: RPK-52266-001
 5. MATES WITH: 52213-021*
 6. APPLICABLE CRIMP PIN: 50147-8*00
 7. APPLICATION SPECIFICATION: AS-52266-001

5	SEAL	SILICON	1
4	SEAL STOPPER	PBT GF15%, BLACK	1
3	MATTE SEAL	SILICON	1
2	SEAL COVER	PBT GF15%, BLACK	1
1	PLUG HOUSING	PBT GF15%, BLACK	1
ITEM NO	TITLE	MATERIAL	QTY

INITIAL REVISION:
DRWN Y.MO01 2011/10/18
CHECK TA.ITO 2012/02/01
APPR MA.YAMAMOTO 2012/02/13

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									
DIMENSION UNITS		SCALE		CURRENT REV DESC:			molex		
mm		5:1							
GENERAL TOLERANCES (UNLESS SPECIFIED)				2.5 MINI WATERPROOF CONN. ASS'Y					
ANGULAR TOL ± °									
4 PLACES		±		EC NO: 174474			PRODUCT CUSTOMER DRAWING		
3 PLACES		±		DRWN: RHORI					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[52266-0213](#)