
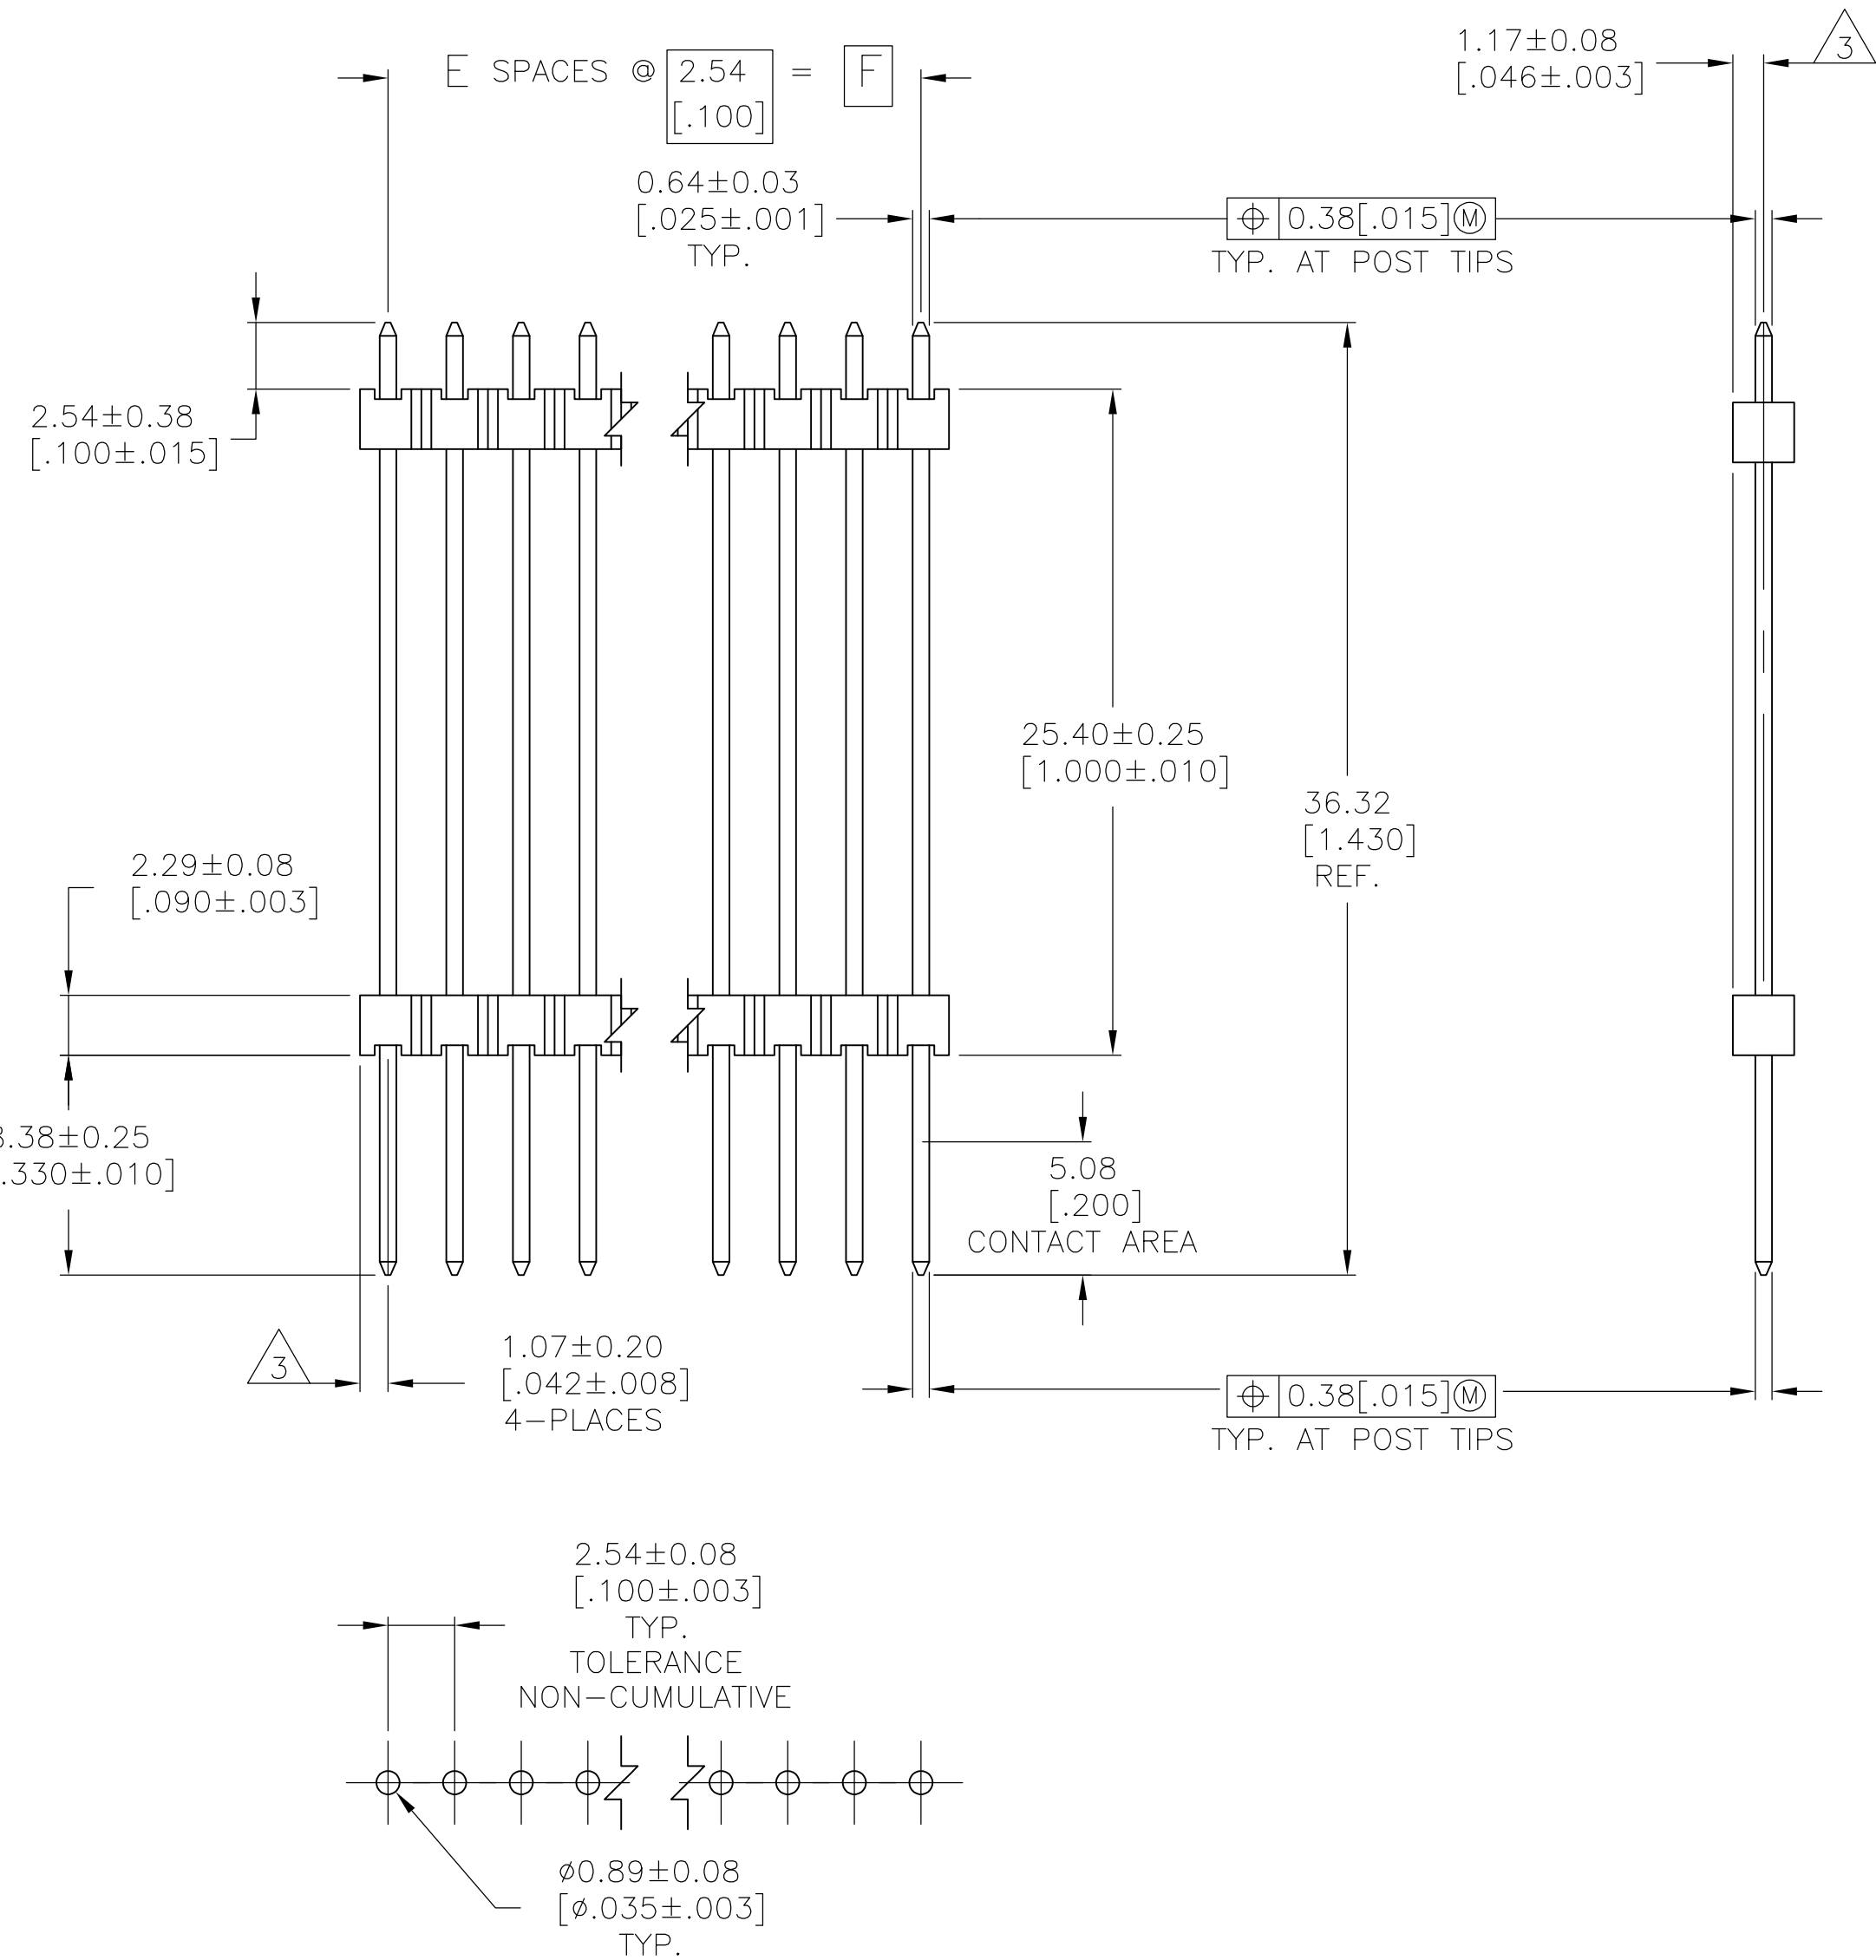


LOC	DIST	REVISIONS					
AD	39	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

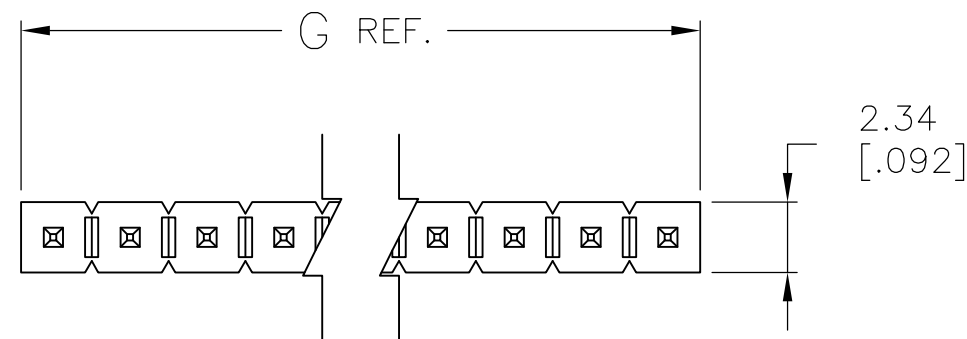


RECOMMENDED HOLE LAYOUT

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381[.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
6. FINISH: 0.000381[.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

	101.19 [3.984]	99.06 [3.900]	39	40	9-146481-0
	98.65 [3.884]	96.52 [3.800]	38	39	8-146481-9
	96.11 [3.784]	93.98 [3.700]	37	38	8-146481-8
	93.57 [3.684]	91.44 [3.600]	36	37	8-146481-7
	91.03 [3.584]	88.90 [3.500]	35	36	8-146481-6
	88.49 [3.484]	86.36 [3.400]	34	35	8-146481-5
	85.95 [3.384]	83.82 [3.300]	33	34	8-146481-4
	83.41 [3.284]	81.28 [3.200]	32	33	8-146481-3
	80.87 [3.184]	78.74 [3.100]	31	32	8-146481-2
	78.33 [3.084]	76.20 [3.000]	30	31	8-146481-1
	75.79 [2.984]	73.66 [2.900]	29	30	8-146481-0
	73.25 [2.884]	71.12 [2.800]	28	29	7-146481-9
	70.71 [2.784]	68.58 [2.700]	27	28	7-146481-8
	68.17 [2.684]	66.04 [2.600]	26	27	7-146481-7
	65.63 [2.584]	63.50 [2.500]	25	26	7-146481-6
	63.09 [2.484]	60.96 [2.400]	24	25	7-146481-5
	60.55 [2.384]	58.42 [2.300]	23	24	7-146481-4
	58.01 [2.284]	55.88 [2.200]	22	23	7-146481-3
	55.47 [2.184]	53.34 [2.100]	21	22	7-146481-2
	52.93 [2.084]	50.80 [2.000]	20	21	7-146481-1
	50.39 [1.984]	48.26 [1.900]	19	20	7-146481-0
	47.85 [1.884]	45.72 [1.800]	18	19	6-146481-9
	45.31 [1.784]	43.18 [1.700]	17	18	6-146481-8
	42.77 [1.684]	40.64 [1.600]	16	17	6-146481-7
	40.23 [1.584]	38.10 [1.500]	15	16	6-146481-6
	37.69 [1.484]	35.56 [1.400]	14	15	6-146481-5
	35.15 [1.384]	33.02 [1.300]	13	14	6-146481-4
	32.61 [1.284]	30.48 [1.200]	12	13	6-146481-3
	30.07 [1.184]	27.94 [1.100]	11	12	6-146481-2
	27.53 [1.084]	25.40 [1.000]	10	11	6-146481-1
	24.99 [.984]	22.86 [.900]	9	10	6-146481-0
	22.45 [.884]	20.32 [.800]	8	9	5-146481-9
	19.91 [.784]	17.78 [.700]	7	8	5-146481-8
	17.37 [.684]	15.24 [.600]	6	7	5-146481-7
	14.83 [.584]	12.70 [.500]	5	6	5-146481-6
	12.29 [.484]	10.16 [.400]	4	5	5-146481-5
	9.75 [.384]	7.62 [.300]	3	4	5-146481-4
	7.21 [.284]	5.08 [.200]	2	3	5-146481-3
	4.67 [.184]	2.54 [.100]	1	2	5-146481-2

5	101.19 [3.984]	99.06 [3.900]	39	40	4-146481-0
5	98.65 [3.884]	96.52 [3.800]	38	39	3-146481-9
5	96.11 [3.784]	93.98 [3.700]	37	38	3-146481-8
5	93.57 [3.684]	91.44 [3.600]	36	37	3-146481-7
5	91.03 [3.584]	88.90 [3.500]	35	36	3-146481-6
5	88.49 [3.484]	86.36 [3.400]	34	35	3-146481-5
5	85.95 [3.384]	83.82 [3.300]	33	34	3-146481-4
5	83.41 [3.284]	81.28 [3.200]	32	33	3-146481-3
5	80.87 [3.184]	78.74 [3.100]	31	32	3-146481-2
5	78.33 [3.084]	76.20 [3.000]	30	31	3-146481-1
5	75.79 [2.984]	73.66 [2.900]	29	30	3-146481-0
5	73.25 [2.884]	71.12 [2.800]	28	29	2-146481-9
5	70.71 [2.784]	68.58 [2.700]	27	28	2-146481-8
5	68.17 [2.684]	66.04 [2.600]	26	27	2-146481-7
5	65.63 [2.584]	63.50 [2.500]	25	26	2-146481-6
5	63.09 [2.484]	60.96 [2.400]	24	25	2-146481-5
5	60.55 [2.384]	58.42 [2.300]	23	24	2-146481-4
5	58.01 [2.284]	55.88 [2.200]	22	23	2-146481-3
5	55.47 [2.184]	53.34 [2.100]	21	22	2-146481-2
5	52.93 [2.084]	50.80 [2.000]	20	21	2-146481-1
5	50.39 [1.984]	48.26 [1.900]	19	20	2-146481-0
5	47.85 [1.884]	45.72 [1.800]	18	19	1-146481-9
5	45.31 [1.784]	43.18 [1.700]	17	18	1-146481-8
5	42.77 [1.684]	40.64 [1.600]	16	17	1-146481-7
5	40.23 [1.584]	38.10 [1.500]	15	16	1-146481-6
5	37.69 [1.484]	35.56 [1.400]	14	15	1-146481-5
5	35.15 [1.384]	33.02 [1.300]	13	14	1-146481-4
5	32.61 [1.284]	30.48 [1.200]	12	13	1-146481-3
5	30.07 [1.184]	27.94 [1.100]	11	12	1-146481-2
5	27.53 [1.084]	25.40 [1.000]	10	11	1-146481-1
5	24.99 [.984]	22.86 [.900]	9	10	1-146481-0
5	22.45 [.884]	20.32 [.800]	8	9	146481-9
5	19.91 [.784]	17.78 [.700]	7	8	146481-8
5	17.37 [.684]	15.24 [.600]	6	7	146481-7
5	14.83 [.584]	12.70 [.500]	5	6	146481-6
5	12.29 [.484]	10.16 [.400]	4	5	146481-5
5	9.75 [.384]	7.62 [.300]	3	4	146481-4
5	7.21 [.284]	5.08 [.200]	2	3	146481-3
5	4.67 [.184]	2.54 [.100]	1	2	146481-2
5	2.13 [.084]	-	-	1	146481-1
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG. E. BRANDBERG 14-MAR-97		 TE Connectivity	
		CHK. G. DUBNICZKI 14-MAR-97			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm [INCHES]		APPROX. G. DUBNICZKI 14-MAR-97		HEADER ASSEMBLY, MOD II,	
		1 PLOC ±		STACKING, SINGLE ROW,	
		2 PLOC ±		.025 SO. POST, UNSHROUDED	
		3 PLOC ± 0.015 [0.06]			
		4 PLOC ± 0.012 [0.0005]			
		5 ANGLES ±			
MATERIAL		FINISH		SIZE	
		SEE TABLE		CAGE CODE	
		WEIGHT		DRAWING NO	
		CUSTOMER DRAWING		RESTRICTED TO	
				A1 00779 C 146481	
				SCALE 4:1 SHEET 1 OF 1 REV A	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[8-146481-3](#)