


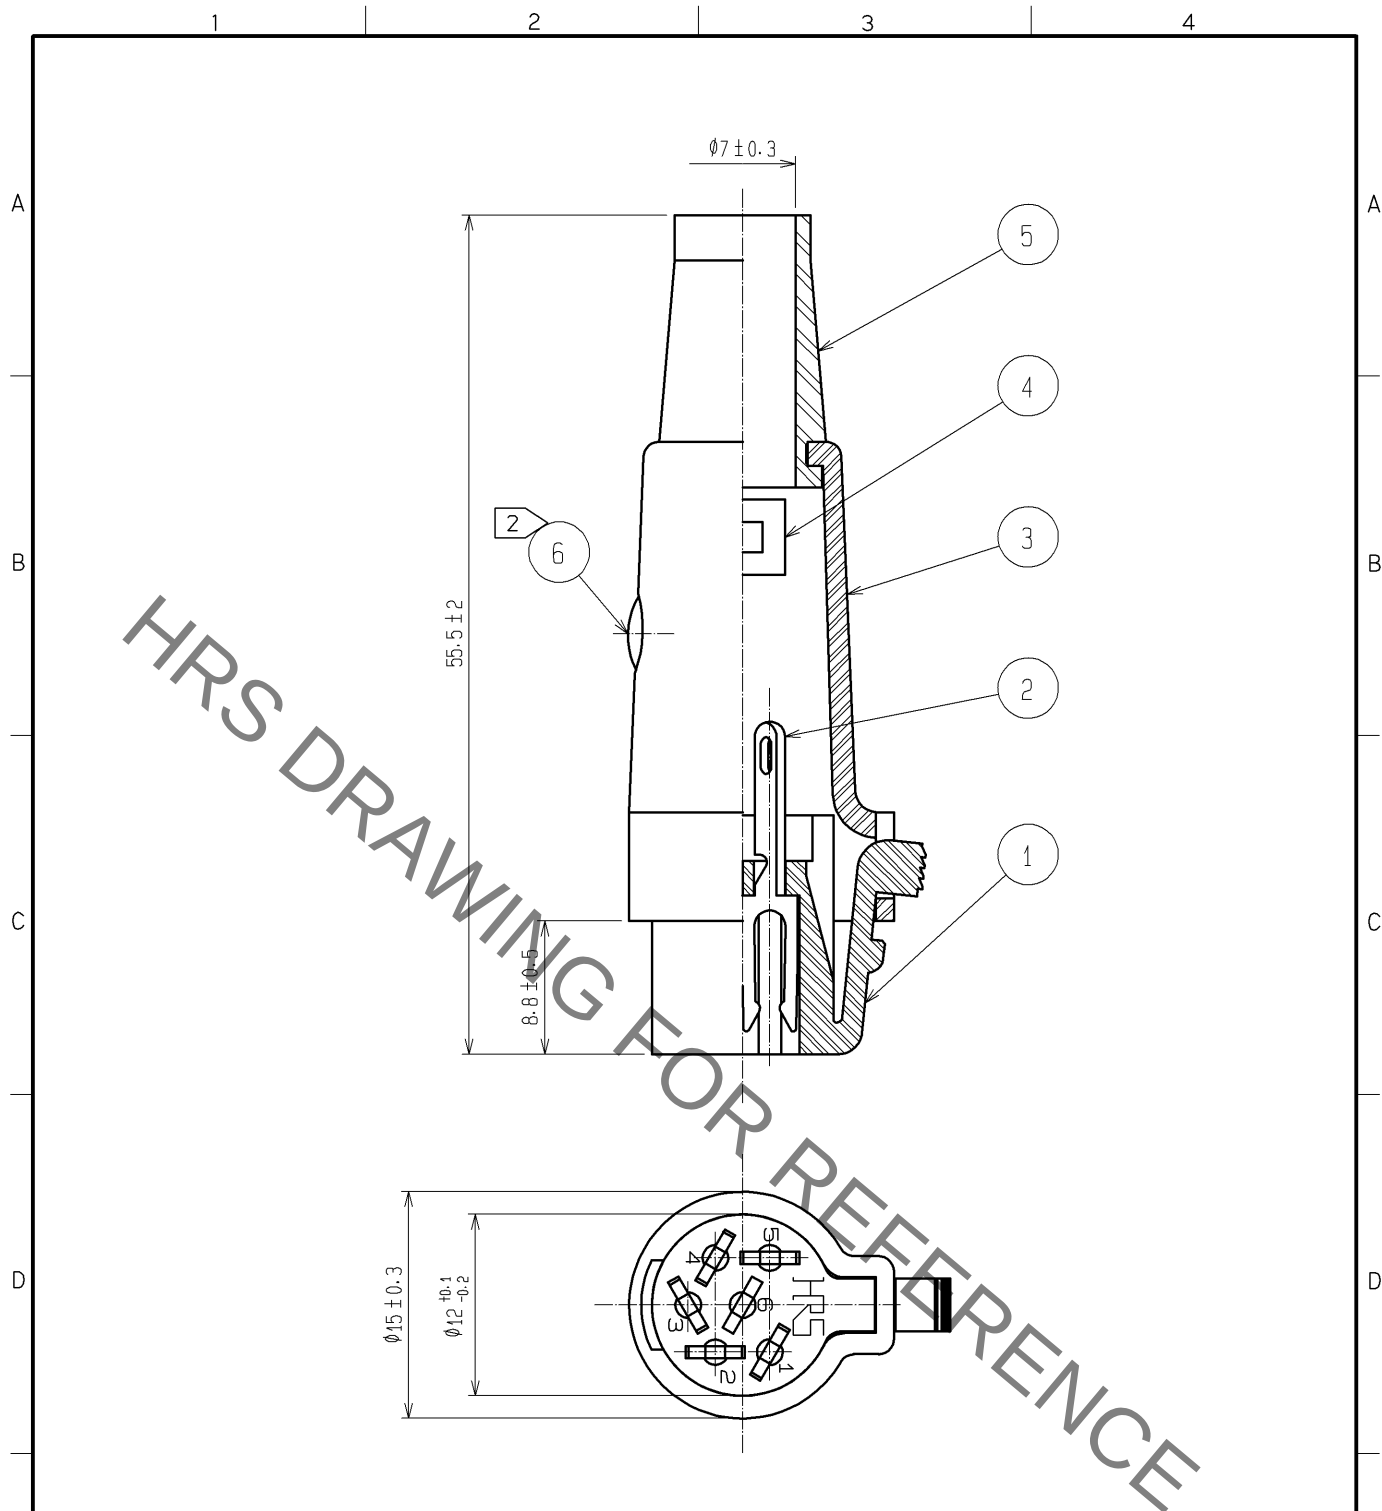

NOTES: ① (注1削除)

② THE RECOMMENDED CLAMP TORQUE OF REF.No. ⑥ : 0.3 TO 0.4 N・m.

① LOCTITE 243, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT REF.No. ⑥ FROM LOOSENING.

③ THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
DEPENDING ON THE CABLE STRUCTURE. PLEASE CONFIRM BEFORE THE USE.

3	POLYACETAL	(GRAY) ①	6	BRASS	NICKEL PLATING
2	PHOSPHOR BRONZE	SILVER PLATING 4 μm min.	5	POLYVINYLCHLORIDE	(GRAY)
1	POLYACETAL	(GRAY) ①	4	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 2 : 1	COUNT ① 4	DESCRIPTION OF REVISIONS DIS-C-003328	DESIGNED WR. AJIRO	CHECKED EJ. KUNII	DATE 14. 08. 01
HIROSE ELECTRIC CO., LTD.				APPROVED : EJ. KUNII	12. 03. 23	DRAWING NO. EDC4-005902-71	① 1/1
				CHECKED : HY. KISHI	12. 03. 23	PART NO. RPC1-12P-6S(71)	
				DESIGNED : DS. MATSUNE	12. 03. 22	CODE NO. CL113-0001-8-71	
				DRAWN : TR. SATO	12. 03. 21		