

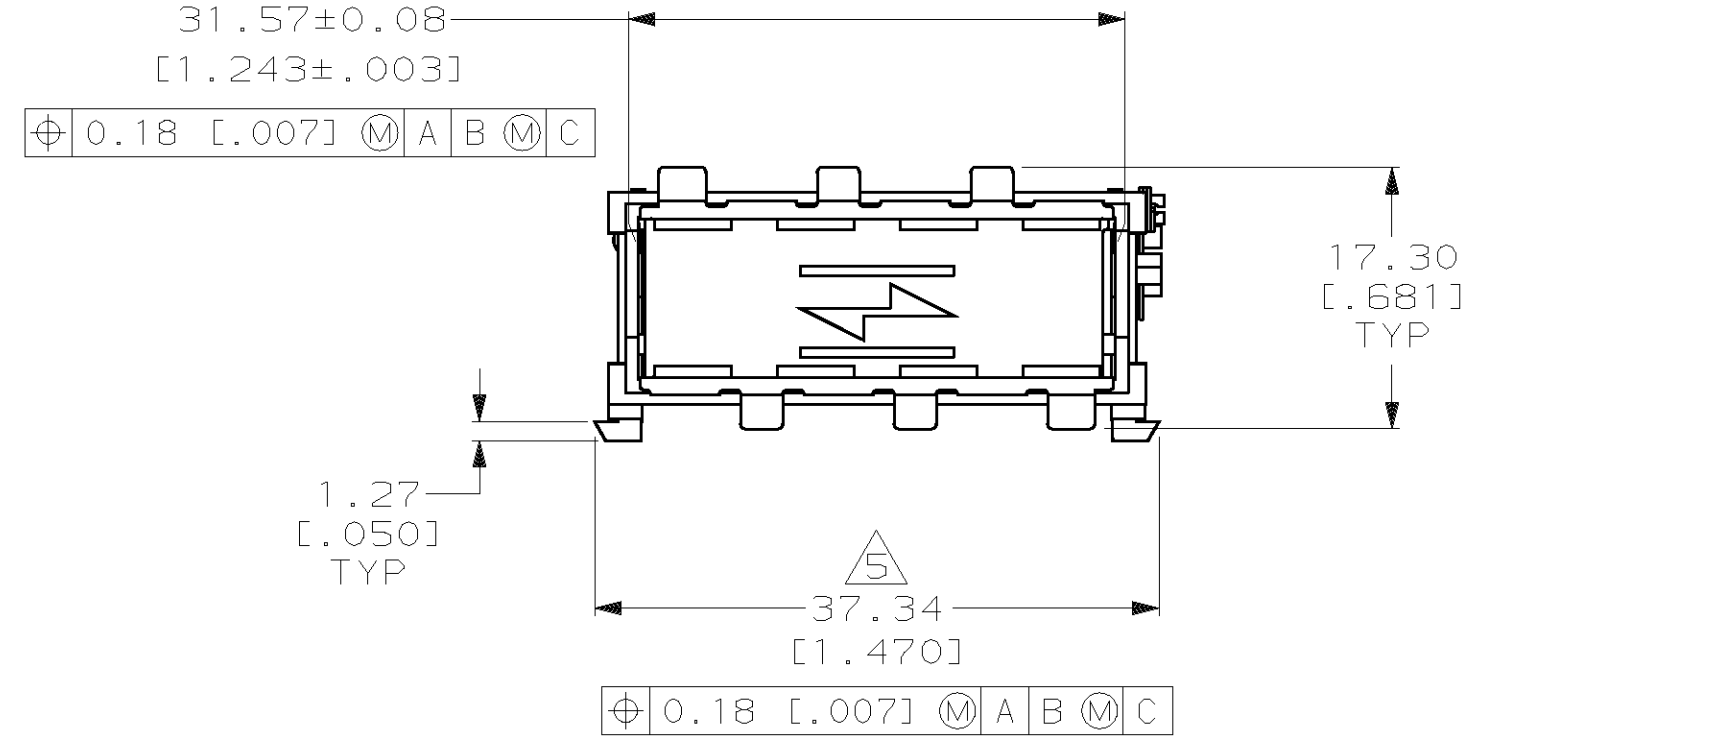
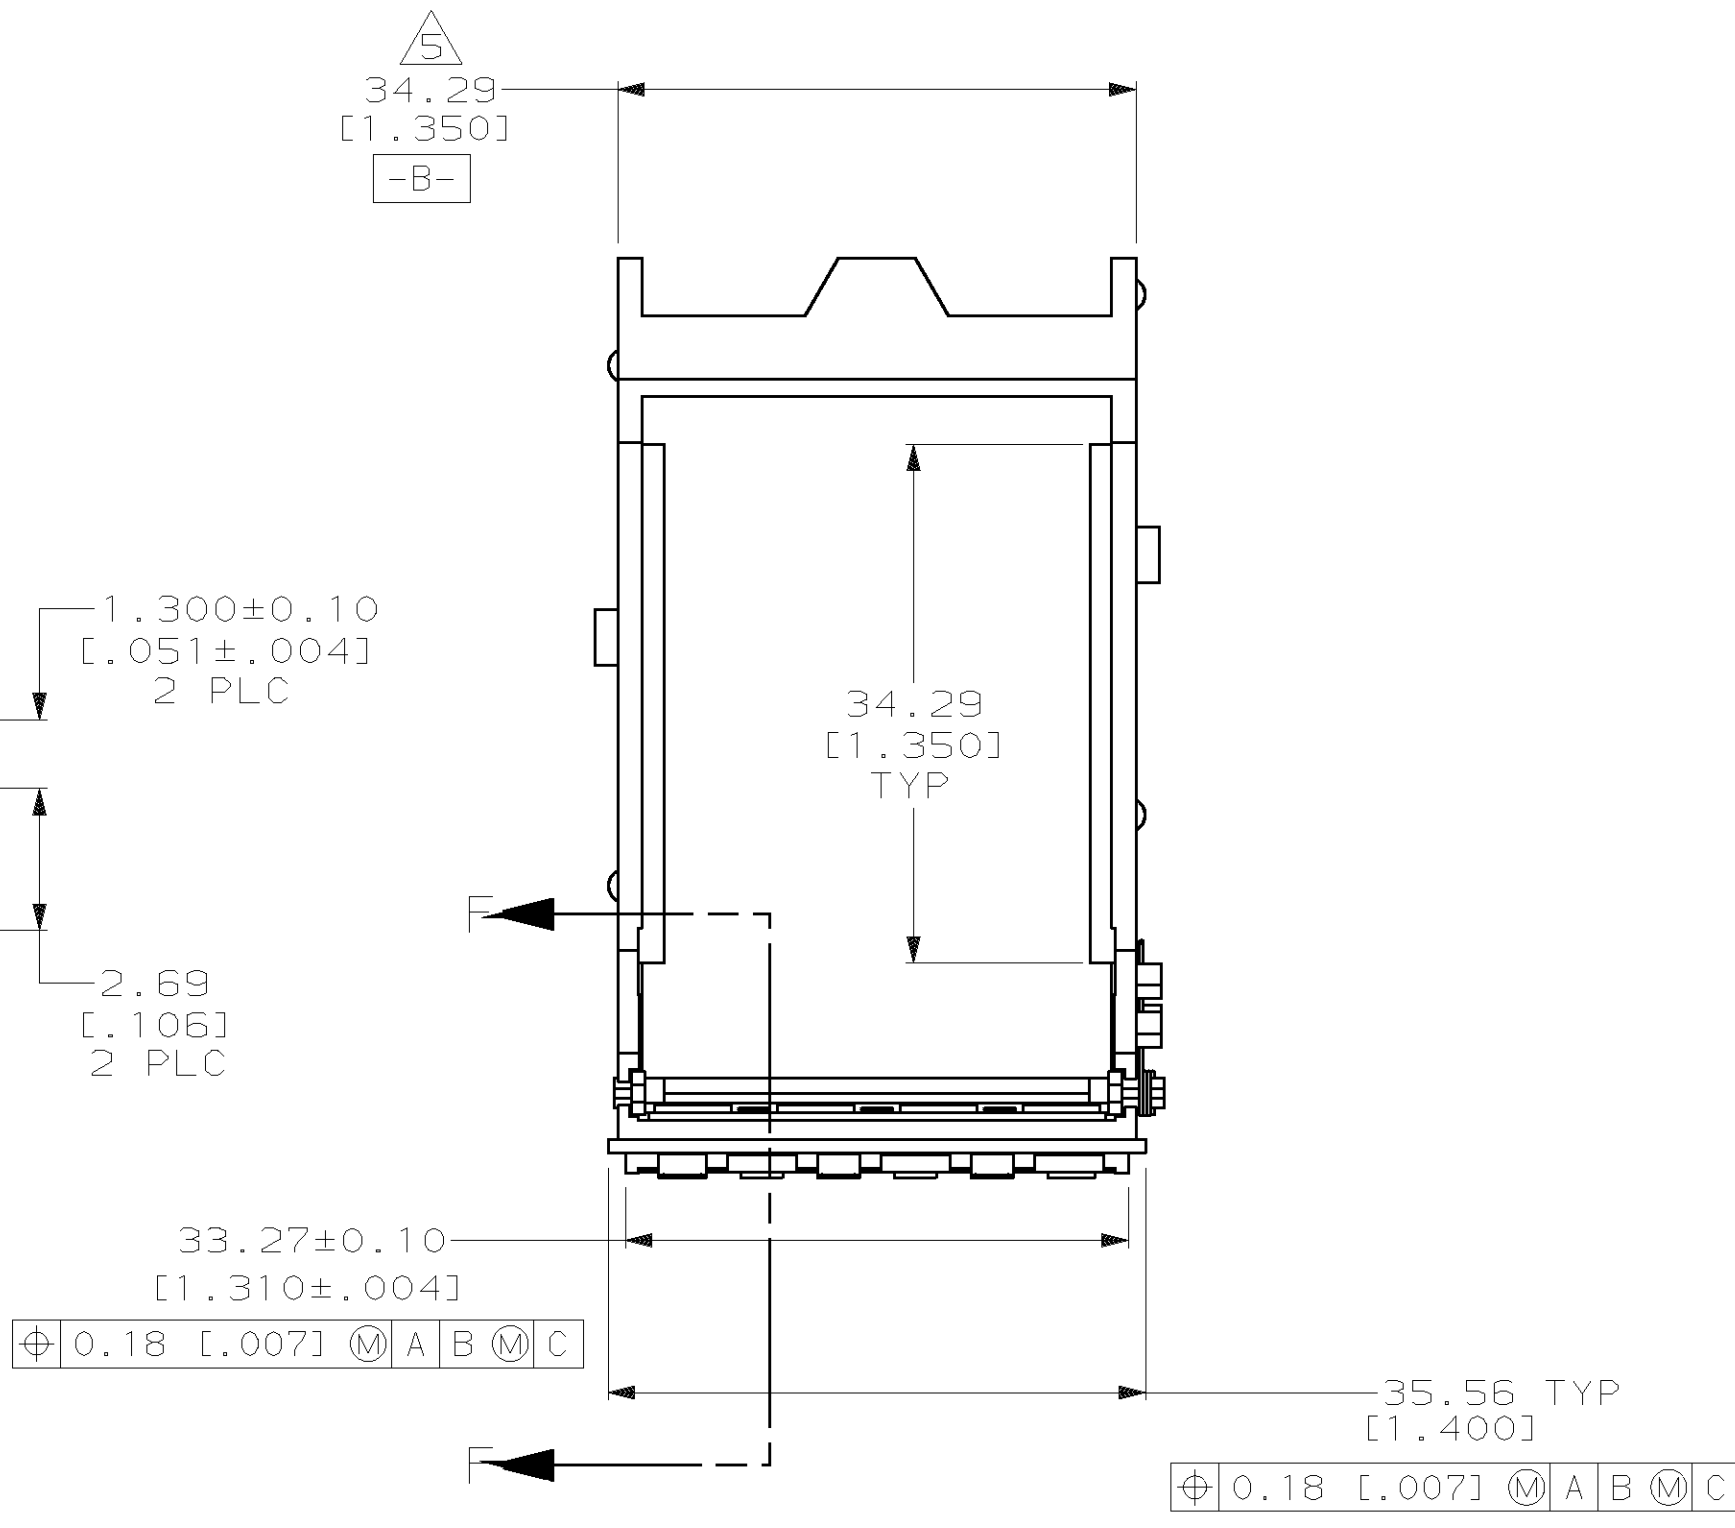
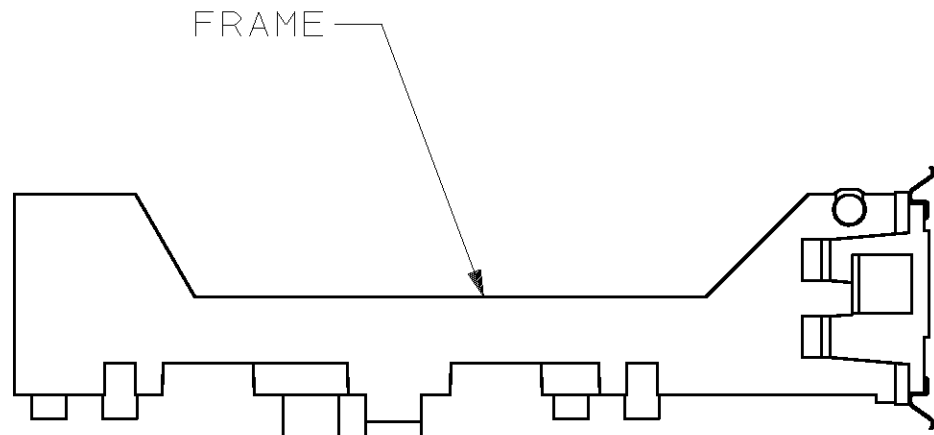
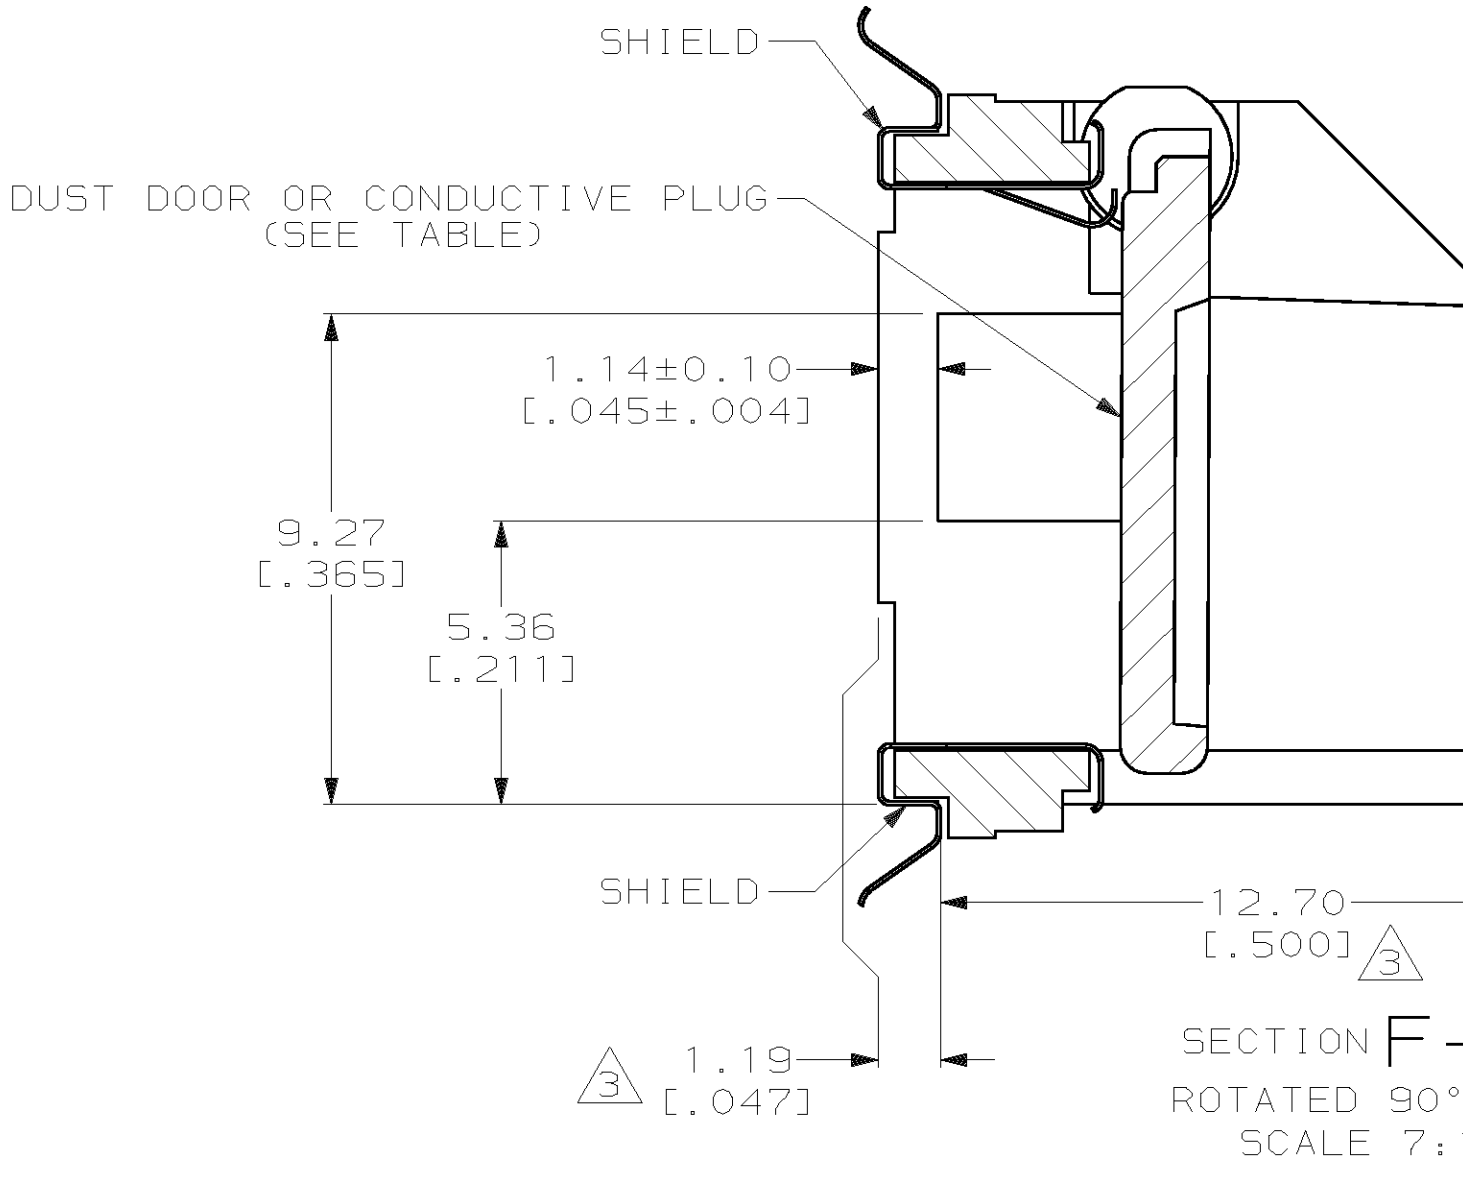


LOC	DIST	REVISIONS				
		REV	DATE	BY	CHKD	APPD
GP	00	L	REVISED PER EC 0513-0435-03	16APR04	JG	JG

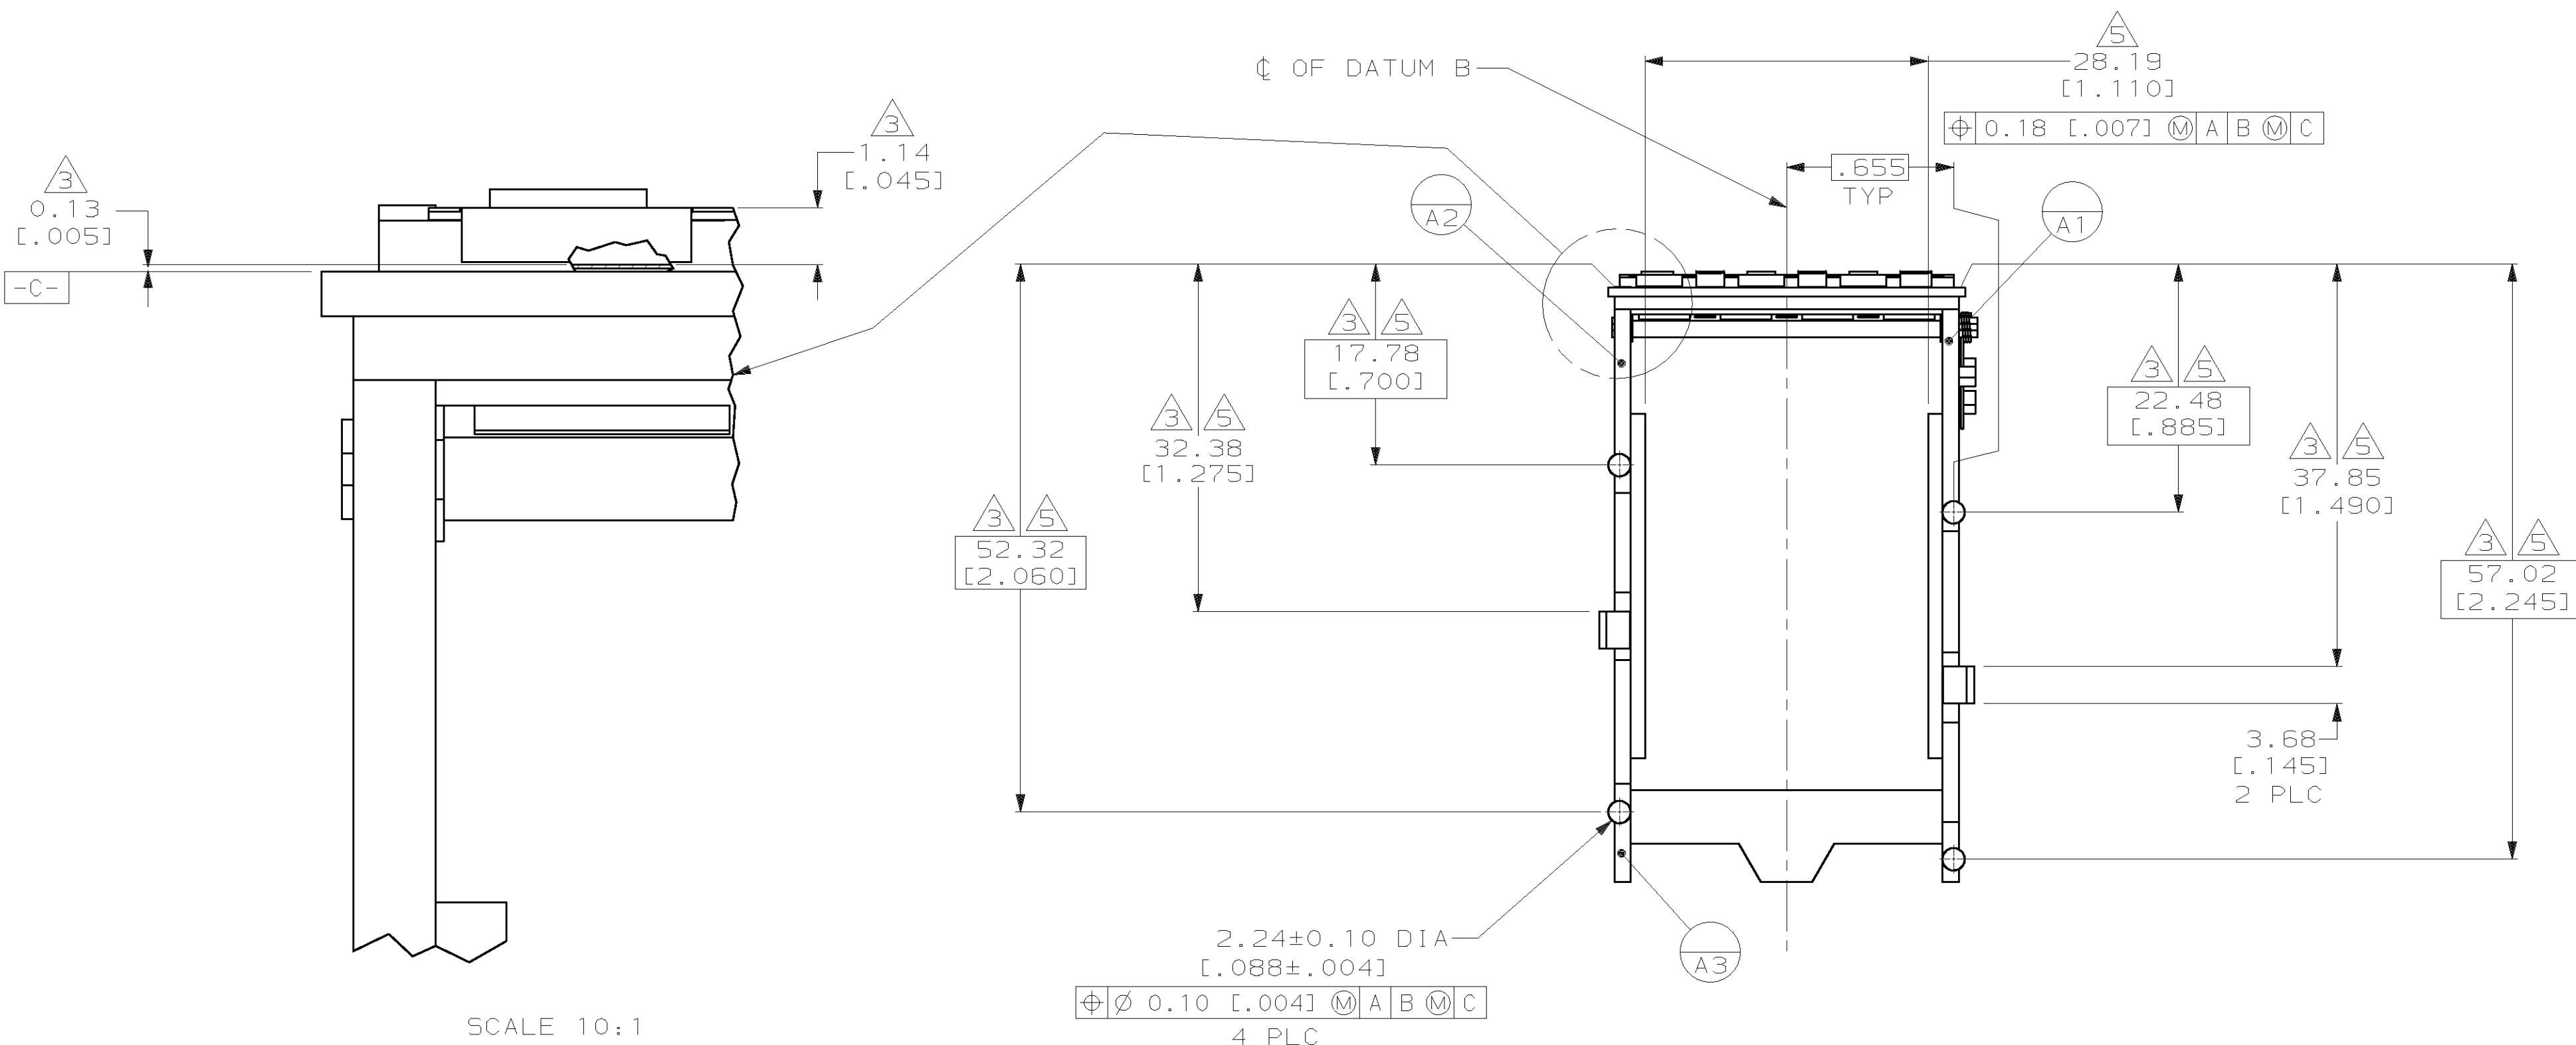


- 1 DUST DOOR: ZINC ALLOY (-3,-4,-4), HTN POLYMER (-6,-7,-8). CONDUCTIVE PLUG: ABS (1-2,1-3,1-4). SPRING: STAINLESS STEEL. SHIELD: PHOSPHOR BRONZE.
- 2 METAL DUST DOOR: 2.54µm [0.00100] MIN NICKEL OVER 5.08µm [0.00200] MIN COPPER. SHIELD: 1.27µm [0.00050] MIN NICKEL.
- 3 DIMENSION APPLIES TO FRONT OF SHIELD.
- 4 LOWER EDGE OF PANEL OPENING IS 0.15 [.006] BELOW TOP OF PCB FOR HORIZONTAL APPLICATION.
- 5 DIMENSION APPLIES WHEN ASSEMBLED TO PRINTED CIRCUIT BOARD.

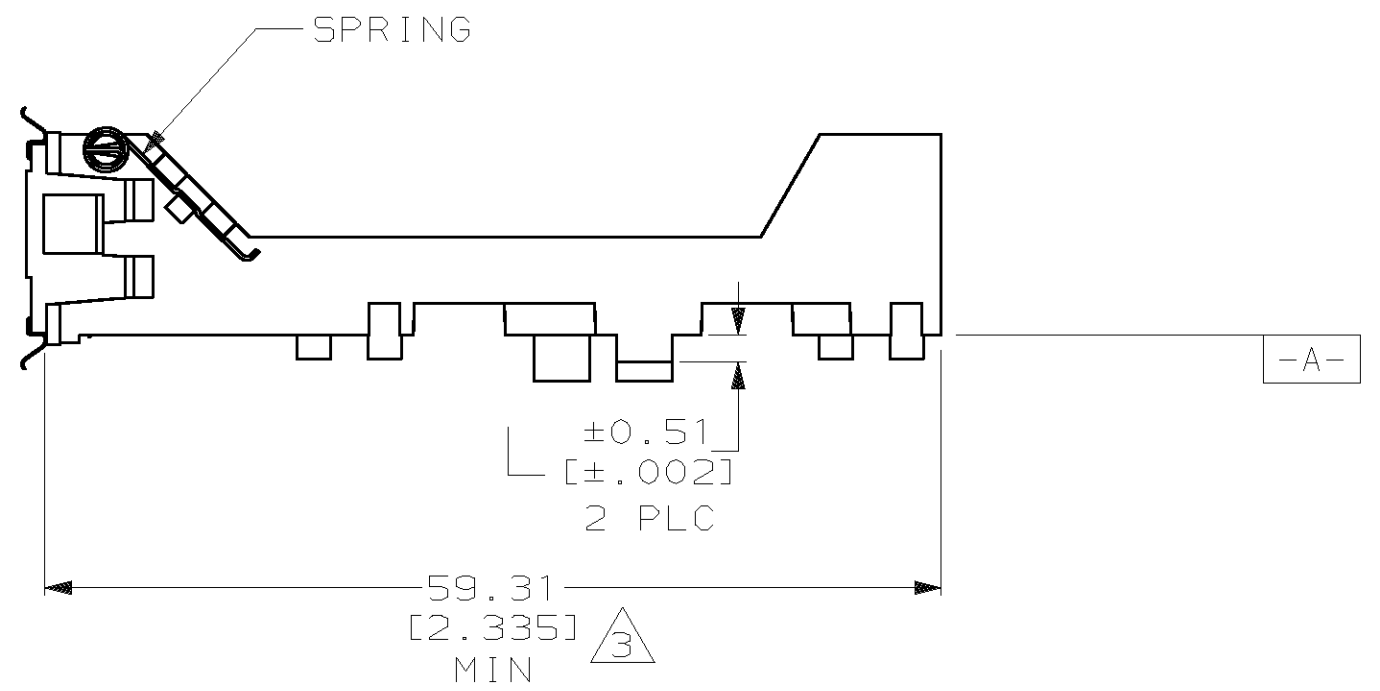

OBSOLETE	CONDUCTIVE PLUG	2.26 [.089]	1-788370-4
OBSOLETE	CONDUCTIVE PLUG	2.77 [.109]	1-788370-3
OBSOLETE	CONDUCTIVE PLUG	1.80 [.071]	1-788370-2
OBSOLETE	NO DOOR OR PLUG	2.26 [.089]	1-788370-1
OBSOLETE	NO DOOR OR PLUG	2.77 [.109]	1-788370-0
OBSOLETE	NO DOOR OR PLUG	1.80 [.071]	788370-9
OBSOLETE	PLASTIC DOOR	2.26 [.089]	788370-8
OBSOLETE	PLASTIC DOOR	2.77 [.109]	788370-7
OBSOLETE	PLASTIC DOOR	1.80 [.071]	788370-6
	METAL DOOR	2.26 [.089]	788370-5
	METAL DOOR	2.77 [.109]	788370-4
	METAL DOOR	1.80 [.071]	788370-3
	DUST DOOR OR CONDUCTIVE PLUG	L	PART NUMBER

LOC		DIST		REVISIONS			
F	LTR	DESCRIPTION		DATE	OWN	APVD	
	L	SEE SHEET 1		-	-	-	

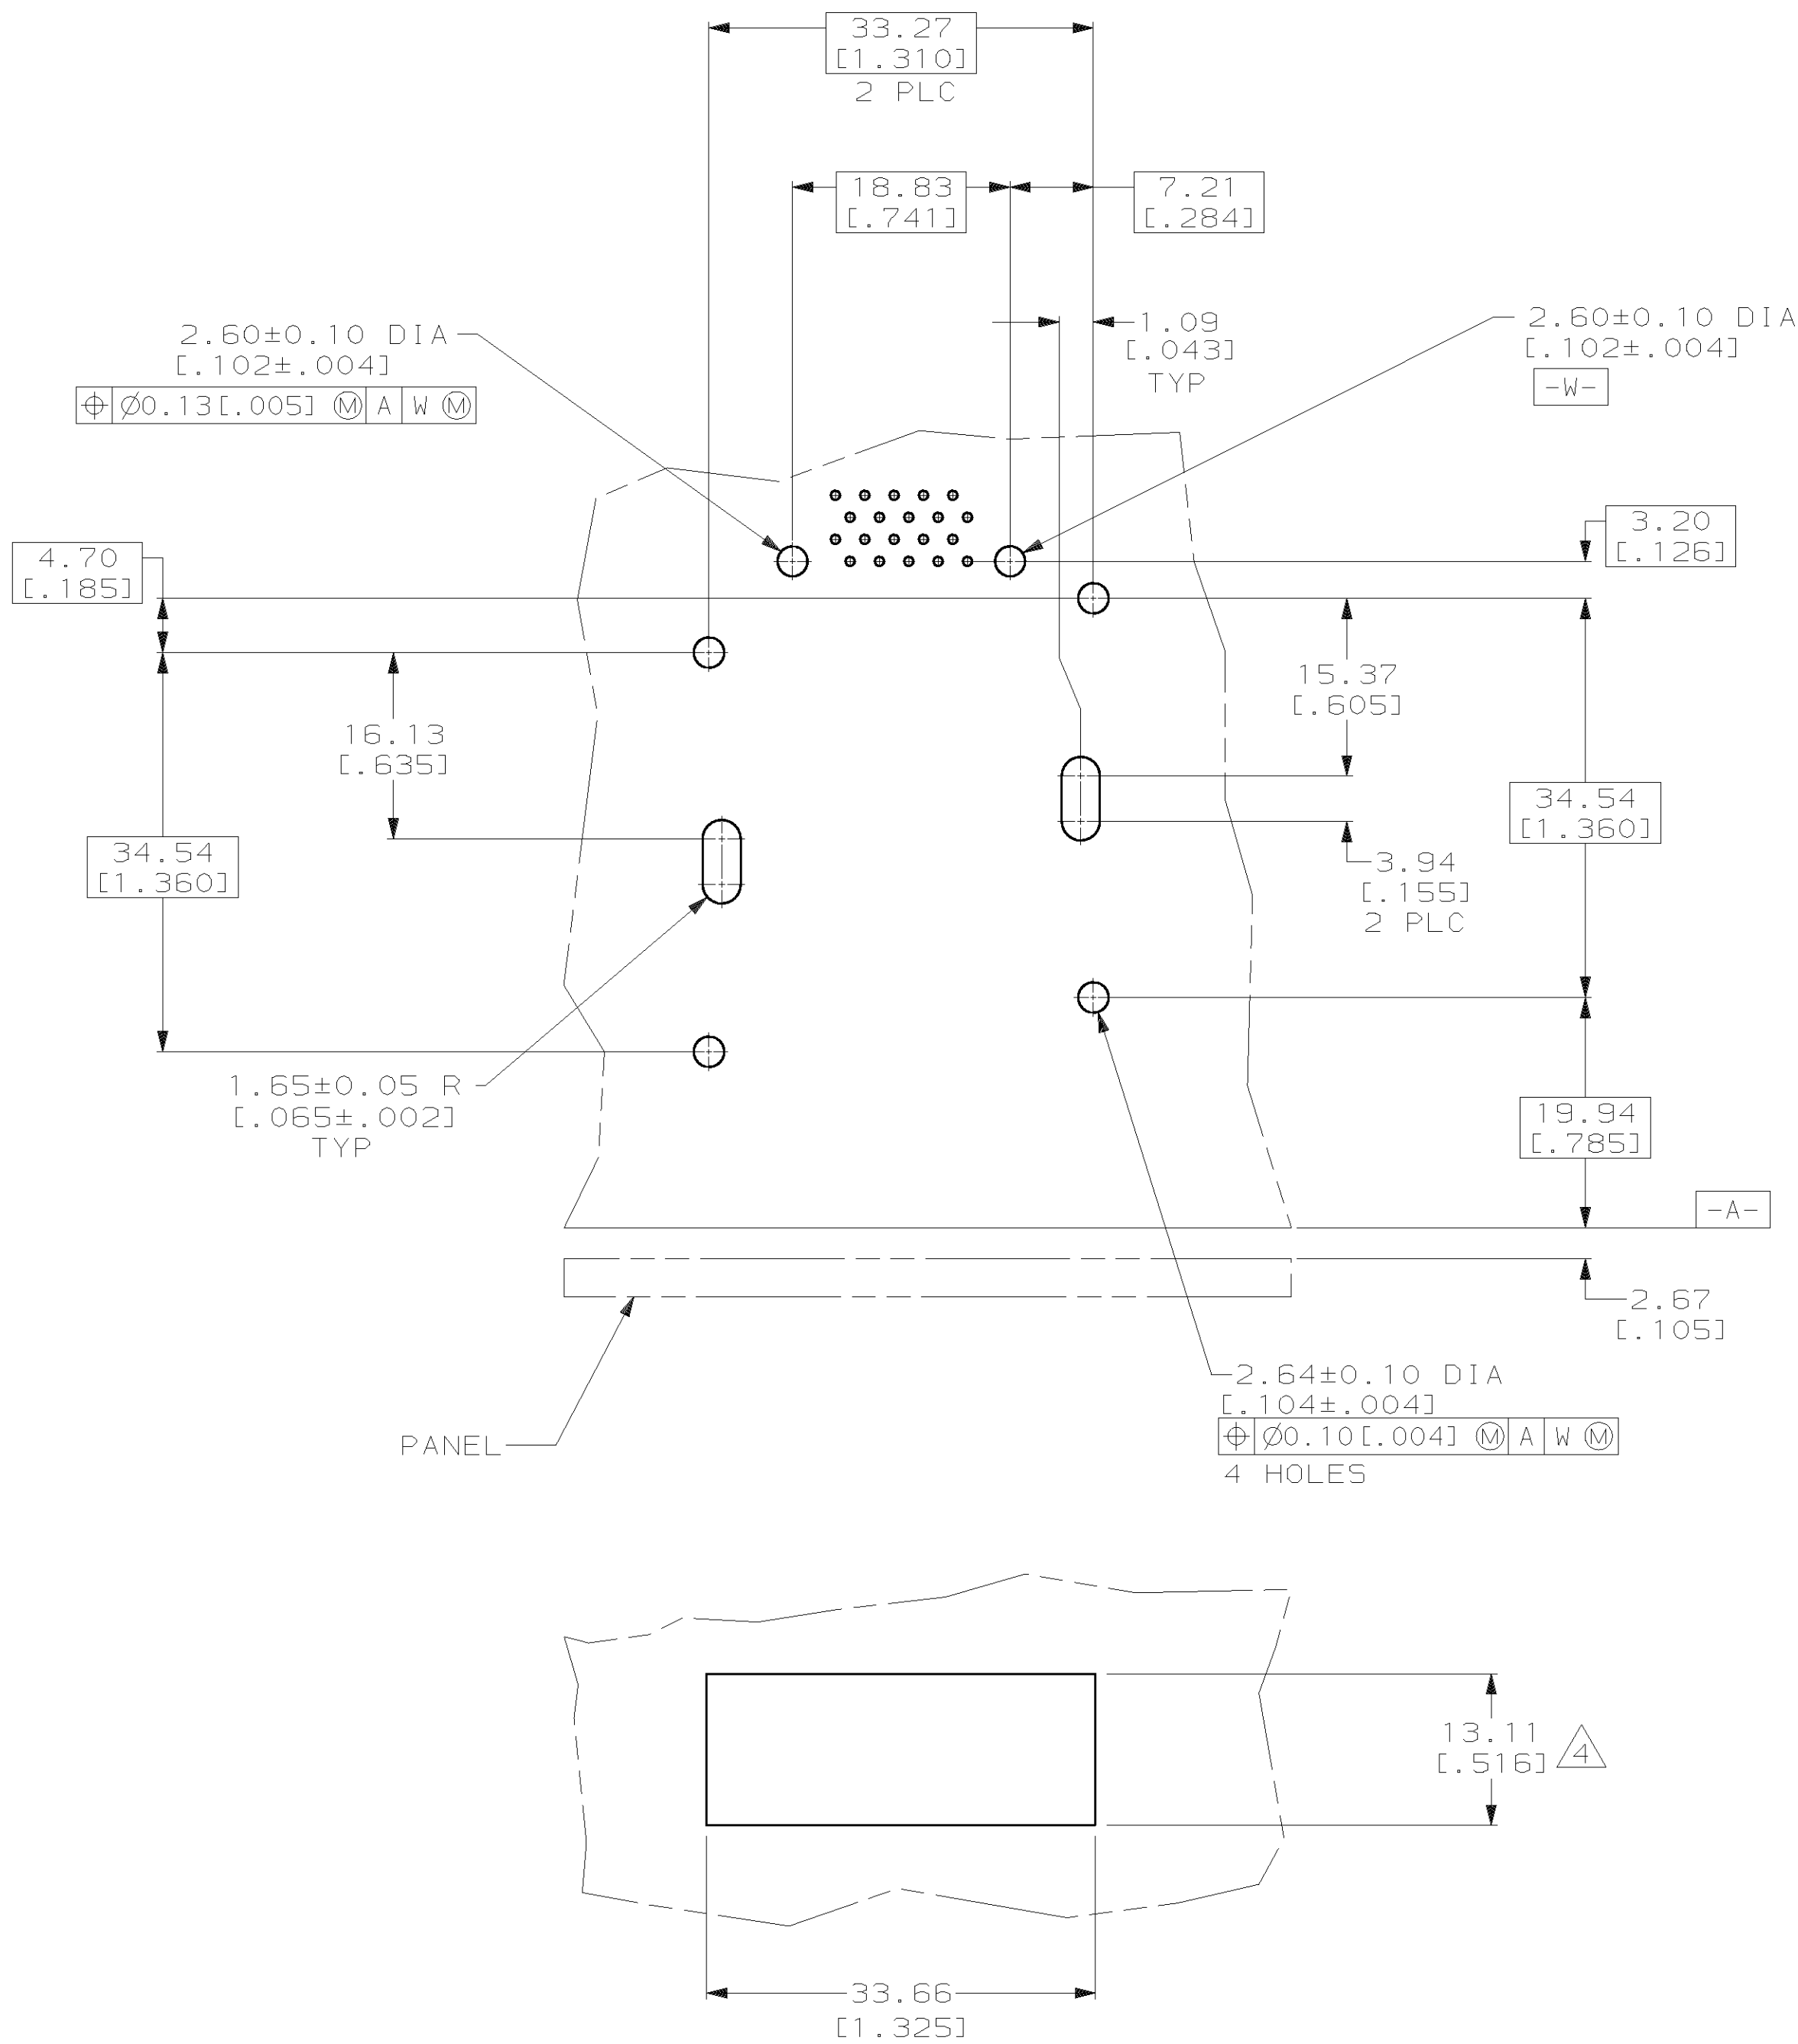

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. OBERMAN	11 JUN 98	AMP AMP Incorporated Harrisburg, PA 17105-3608			
		CHK D. STONE	25 JUN 98				
DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.0 1 PLC ±.0 2 PLC ±.013 (.005) 3 PLC ±.0 4 PLC ±.0 ANGLES ±.0	APVD S. LINDSTROM		NAME GUIDE ASSEMBLY, MEDIA CONVERTER MODULE, CHAMP BLINDMATE			
		PRODUCT SPEC		SIZE A1			
		APPLICATION SPEC		SCALE 2:1			
MATERIAL -	FINISH -	WEIGHT -		DRAWING NO 788370			
CUSTOMER DRAWING				SHEET 22	OF 22		
				REV L			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[788370-4](#)