

REV. C
DCO 300855


TOLERANCES $\pm .010$ " - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE _____	CURRENT: 40mA MAX.
NOMINAL VOLTAGE _____	115 VAC - 400Hz
MUST OPERATE _____	70.0 VAC MAX., 400Hz
MUST RELEASE _____	25.0 VAC MAX., 8.0 VAC MIN., 400 Hz

ENVIRONMENT:	
VIBRATION _____	10 Hz TO 3000 Hz @ 30 g's
SHOCK _____	200 g's 6 MS. DURATION
TEMPERATURE _____	-70 °C TO +125 °C

NOTES: OPERATE TIME 15 mS MAX.
RELEASE TIME 50 mS MAX.
CONTACT BOUNCE 1 mS MAX.

CUSTOMER DATA SHEET

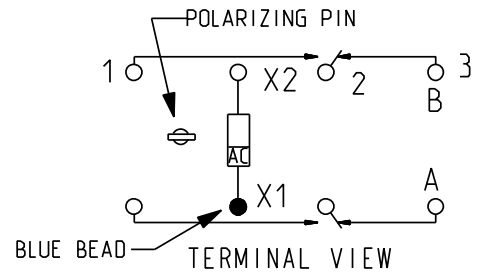

CONTACT RATING: _____
10 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE.
100,000 OPERATIONS

DR. B.D. 06MAR2008 | CK. J.M.B. 5/14/08

Tyco Electronics ©COPYRIGHT 2005
TYCO ELECTRONICS CORPORATION
ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ CATALOG ITEM
CUST. NO. _____ REV. _____

TE NUMBER
1-1617752-5

CII PART NUMBER
FCA-210-DY8

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[FCA-210-DY8](#)