


LOC		DIST		REVISIONS					
—		—		P	LTR	DESCRIPTION	DATE	DWN	APVD
					A1	REVISED PER ECO-11-005294	02APR11	RK	HMR


NOTES:

- 1 FOR MINI-APPLICATOR CRIMPING.
- 2 UNDERCOATING:1,25µm Ni,SELECTIVE:0,8µm Au, ZONE 1: 0,5µm MIN. GOLDFLASH.
- 3 UNDERCOATING:1,25µm Ni,SELECTIVE:0,8µm Au, REMAINDER:GOLDFLASH.
- 4 ZONE 1:BRIGHT TIN/LEAD PLATED.
- 5 PRE-TIN PLATED 2,0µm.
- 6 MATERIAL:PHOSPHORBRONZE

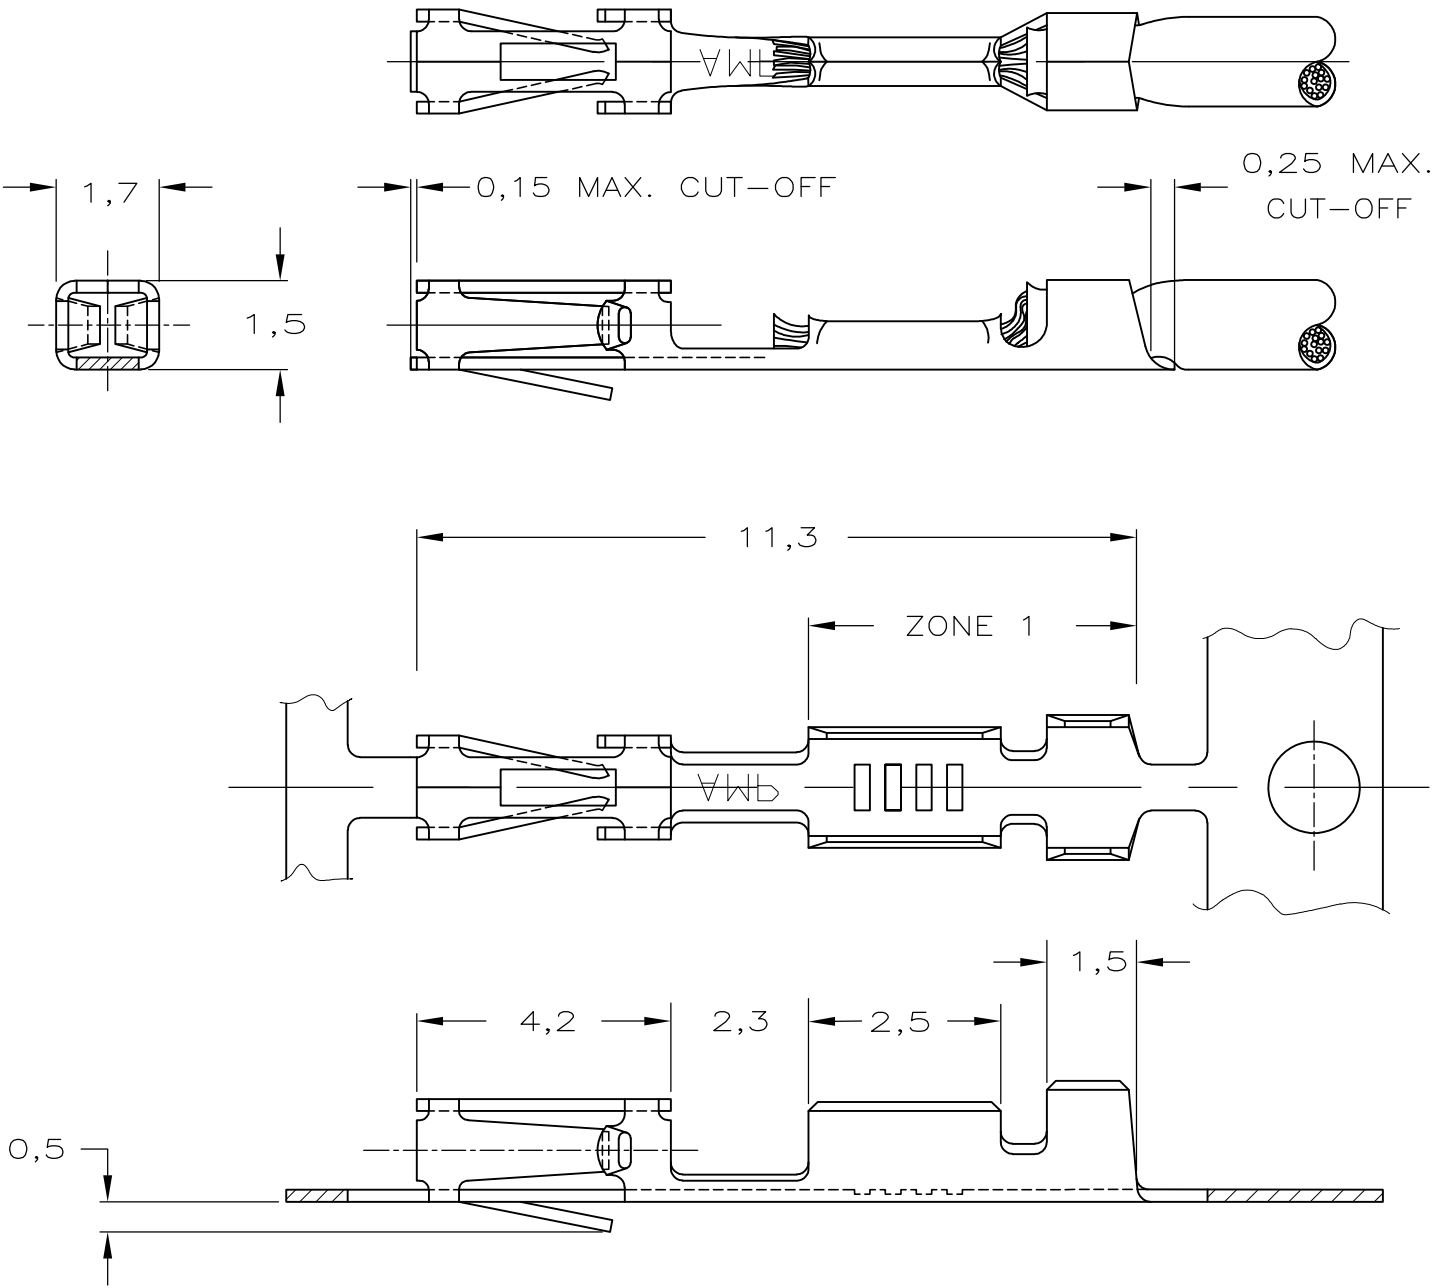

TIN	5	167024-3	167021-3
GOLD	3	167024-2	167021-2
GOLD	2	167024-1	167021-1
FINISH		LOOSE PIECE	PARTNUMBER

WIRE RANGE :
0,03-0,09 mm² 28-32 AWG
INSULATION RANGE :
0,5-1,02 DIA. .020-.040 DIA.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.v.LIEMPT	03 DEC 98	 TE Connectivity						
DIMENSIONS: mm		CHK J.v.LIEMPT	—	NAME AMPMODU MOD.4 RECEPTACLE, S.C.P. STRIP						
		APVD E.LEIJTENS	—							
		PRODUCT SPEC —								
		APPLICATION SPEC —								
MATERIAL —		FINISH —		SIZE A3	CAGE CODE 00779	DRAWING NO C-167021		RESTRICTED TO —		
CUSTOMER DRAWING				SCALE —	SHEET 1 OF 1		REV A1			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[167021-1](#)