

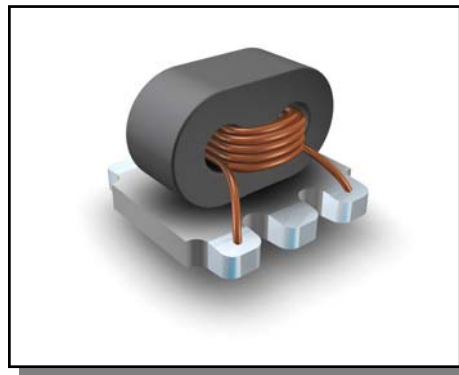
**E-Series RF 4:1 Transmission Line
Transformer 500-3000MHz**

RELEASED

Rev. V2

Features

- Surface Mount
- 4:1 Impedance Ratio
- RoHS* Compliant, lead free
- CT on Secondary
- Available on Tape and Reel


Electrical Specifications @25°C

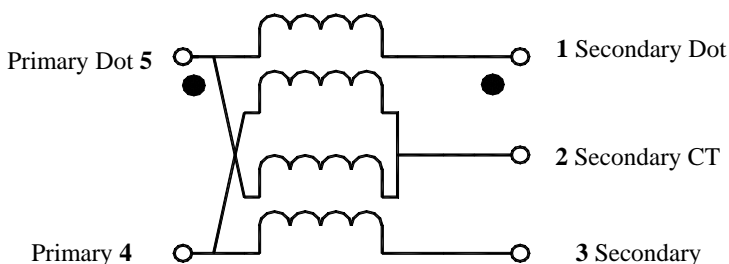
Parameter	Units	Nominal	Maximum	Mean (x)	Sigma (σ)
Frequency Range 500 - 3000	MHz	—	—	—	—
Insertion Loss ($f_L - f_U$)					
500 - 750 MHz	dB	—	3.0	—	—
750 - 1200 MHz	dB	—	1.0	0.22	0.159
1200 - 3000 MHz	dB	—	3.0	—	—

Note: Mean and Sigma calculated from average loss at @ $(f_U - f_L)/2 + f_L$

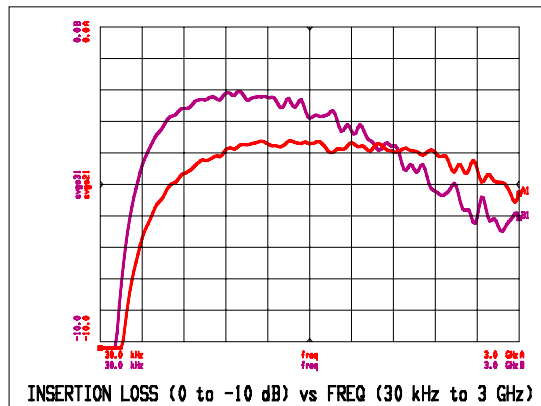
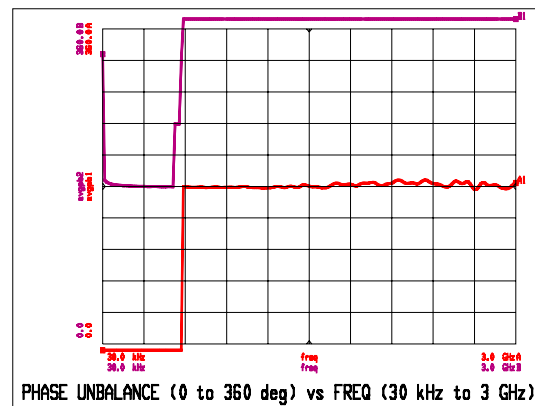
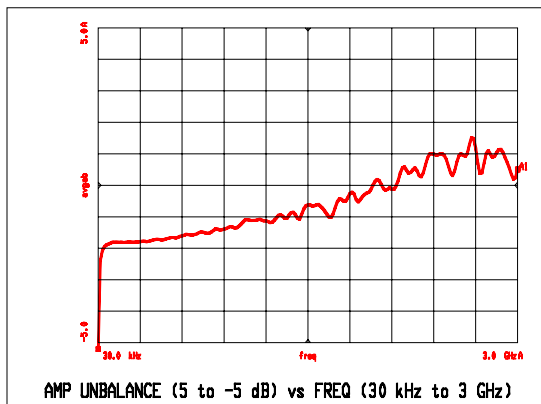
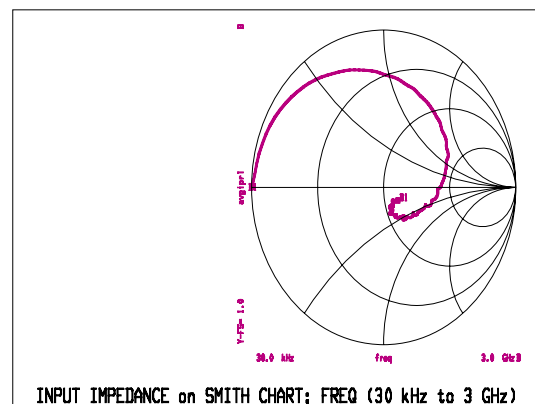
Please Note that the photograph above indicates package only, not actual unit.

Pin Configuration

Pin No.	Function
1	Secondary Dot
2	Secondary CT
3	Secondary
4	Primary
5	Primary Dot

Schematic


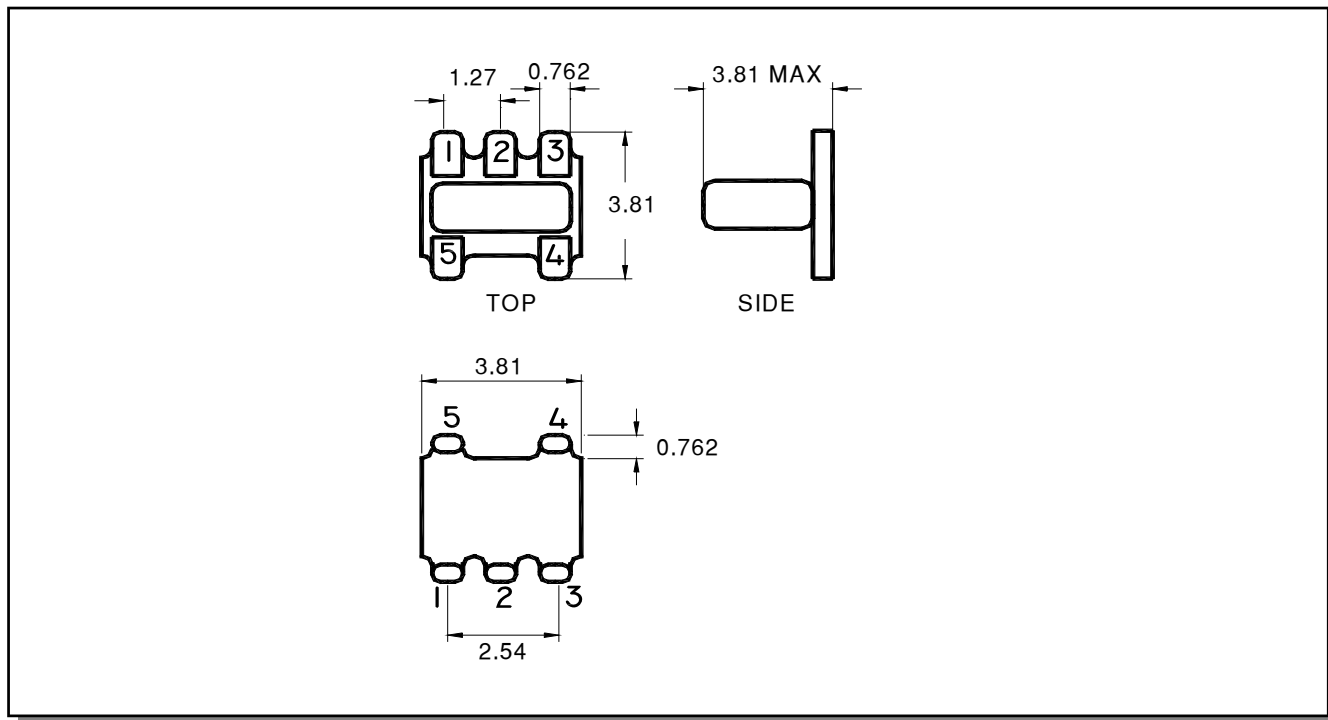
Typical Performance Over Extended Bandwidth (30kHz - 3.0GHz)

Insertion Loss

Phase Unbalance

Amplitude Unbalance

Input Impedance


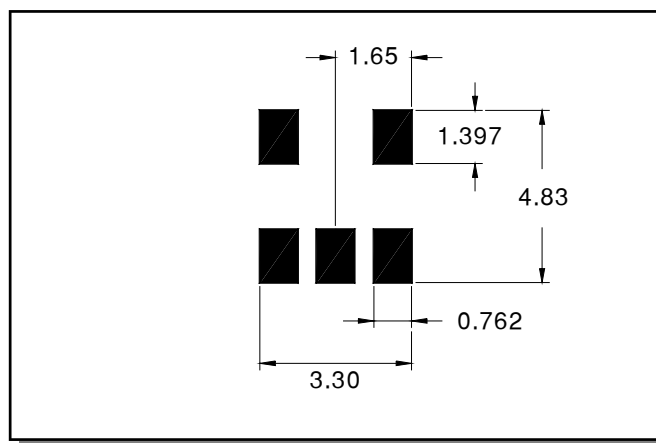
**E-Series RF 4:1 Transmission Line
Transformer 500-3000MHz**

RELEASED

Rev. V2

Outline Drawing


1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code are printed on the reel.
4. Termination plating is Au.

Recommended Footprint


Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel Size	mm	330
Tape Width	mm	12.00
Pitch	mm	8.00
Ao	mm	4.39
Bo	mm	4.35
Ko	mm	3.67
Reference Application Note ANI-019 for orientation		

Ordering Information

Part Number	Description
ETC1.6-4-2-3	2000 piece reel
ETC1.6-4-2-3TB	Customer Test Board

Recommended Maximum Ratings

Parameter	Value
RF power	250mW
DC current	30mA
Operating Temperature	-30°C to +85°C
Storage Temperature	-30°C to +85°C

ECO History

Rev	Date	Description	By
V2	13 May 2010	Corrected the dimensions on case style drawing and changed to the new format	CB

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[MACOM:](#)

[ETC1.6-4-2-3TR](#)