


- 1 TERMINAL WRAPAROUND: 0.007"(0.18mm) APPROX. ON BOTH ENDS
- 2 AVAILABLE IN 2 DIFFERENT SERIES
- 3 FOR FURTHER INFORMATION SEE DATA SHEET FOR 3650 SERIES-LOW INDUCTANCE,HIGH FREQUENCY CHIP INDUCTOR

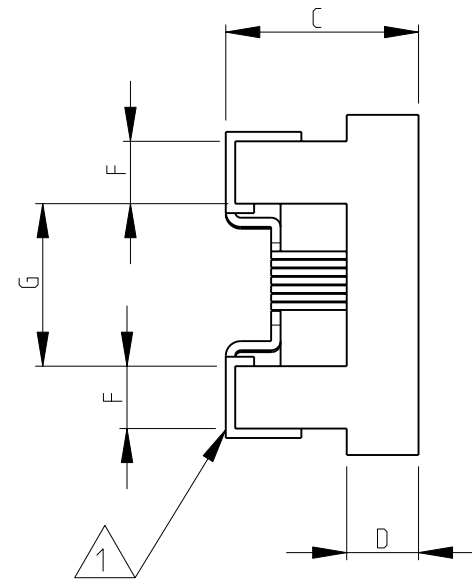


RoHS Compliant

The diagram shows a rectangular unit cell with a width labeled H and a height labeled K . The interior of the rectangle is filled with a cross-hatched pattern. To the left of the rectangle, there is a vertical dimension line labeled J indicating the spacing between the top and bottom of the unit cells. The unit cell is shown as part of a larger structure, with horizontal lines extending from its left and right sides.

36501E	1.27	0.76	0.61	0.15	0.23	0.56	0.66	0.50	0.46
36501J	1.80	1.12	1.02	0.38	0.33	0.86	1.02	0.64	0.64
SERIES	A MAX.	B MAX.	C MAX.	D REF.	F	G	H	K	J

DWN	SUBHASH.M	14-NOV-08
CHK	PRAKASH.S	14-NOV-08
APVD	STEPHEN.P	14-NOV-08

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm			
		0 PLC ± 0.2 1 PLC ± 0.1 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± 5°	
MATERIAL -		FINISH -	



TE Connectivity

NAME	LOW INDUCTANCE, HIGH FREQUENCY CHIP INDUCTOR SERIES 3650
------	--

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A 3	00779	C- 1624112	-

CUSTOMER DRAWING	SCALE 20:1	SHEET 1 OF 1	REV BA1
------------------	------------	--------------	---------

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[36501E9N5JTDG](#)