




LOC		DIST		ZONE		LTM		REVISED PER		DATE	APP
6	14							0720-0230-93		2/25/94	AMP

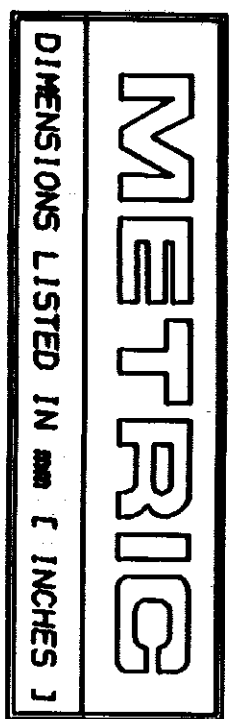

WIRE RANGE		E13288 Listed	
22-16 AWG STRANDED		22-16 AWG STRANDED	
LR7189 Certified		MILITARY P/N AND CLASS	
NOT CERTIFIED		NOT APPLICABLE	

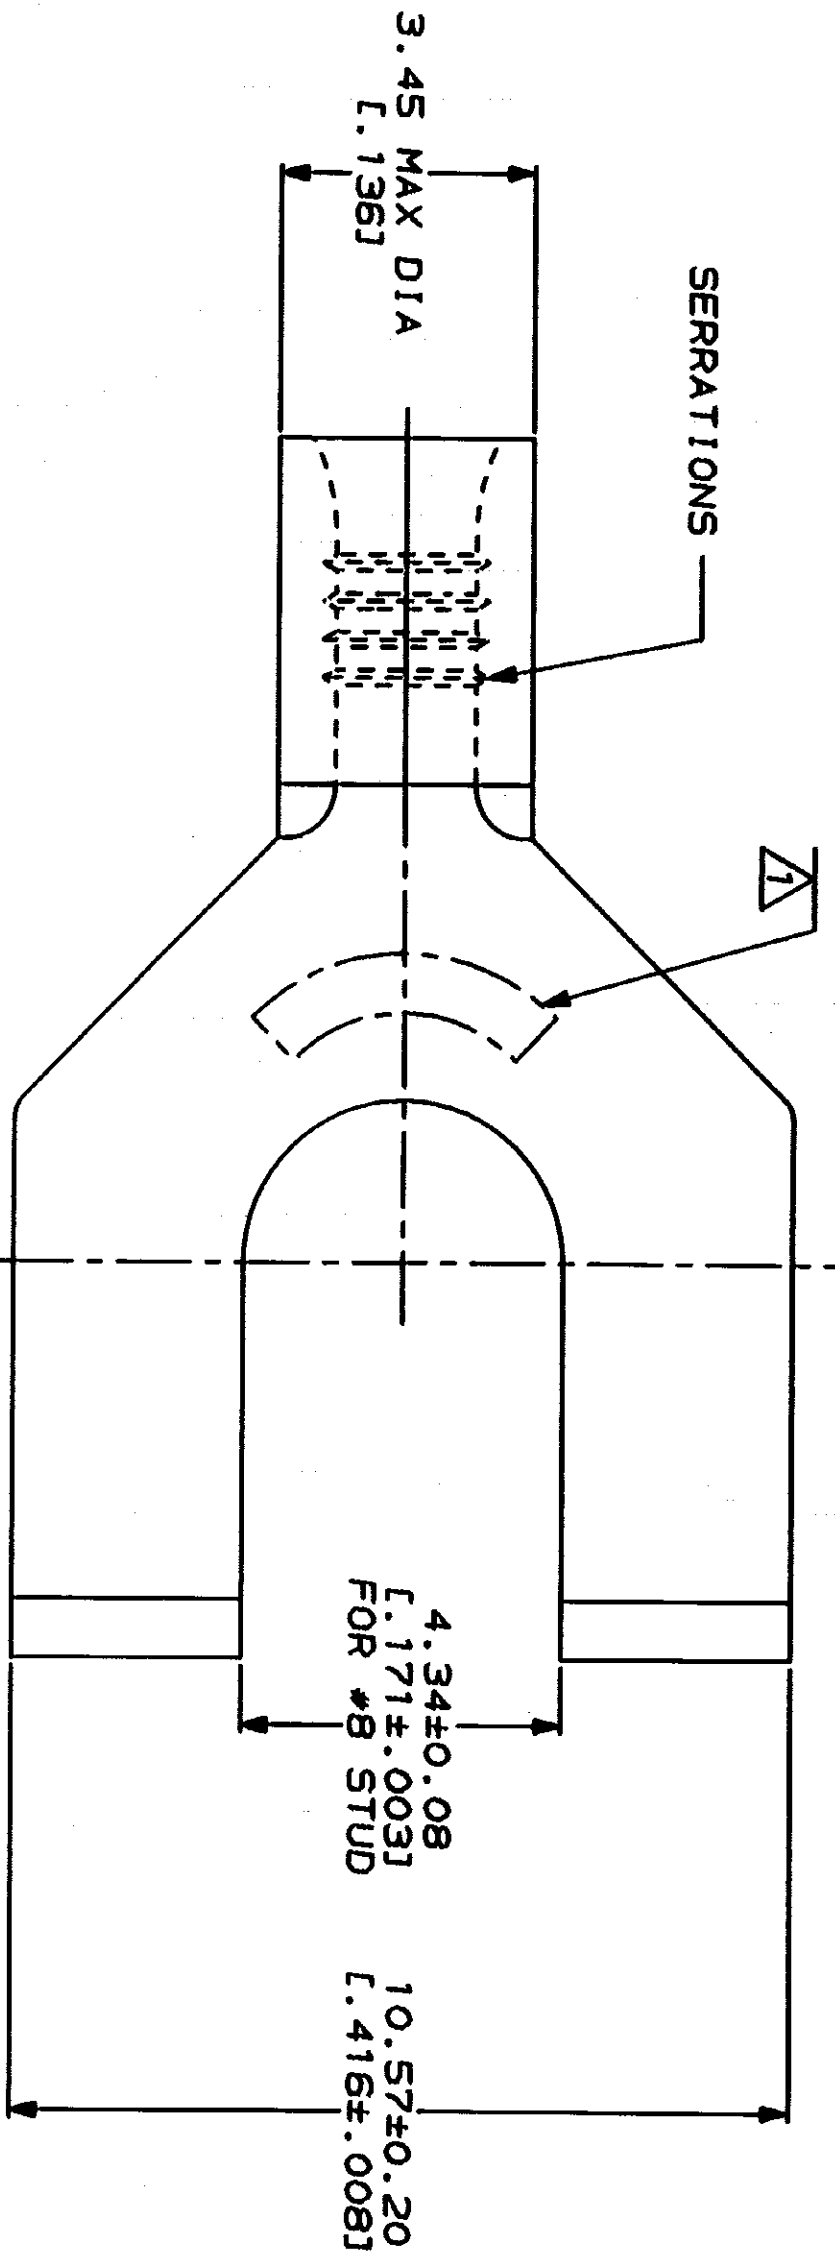

STAMP AMP 22-18* APPROX AS SHOWN
22-16 TERMINALS ARE STAMPED 22-18 IN
ACCORDANCE WITH MILITARY SPECIFICATION
MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16

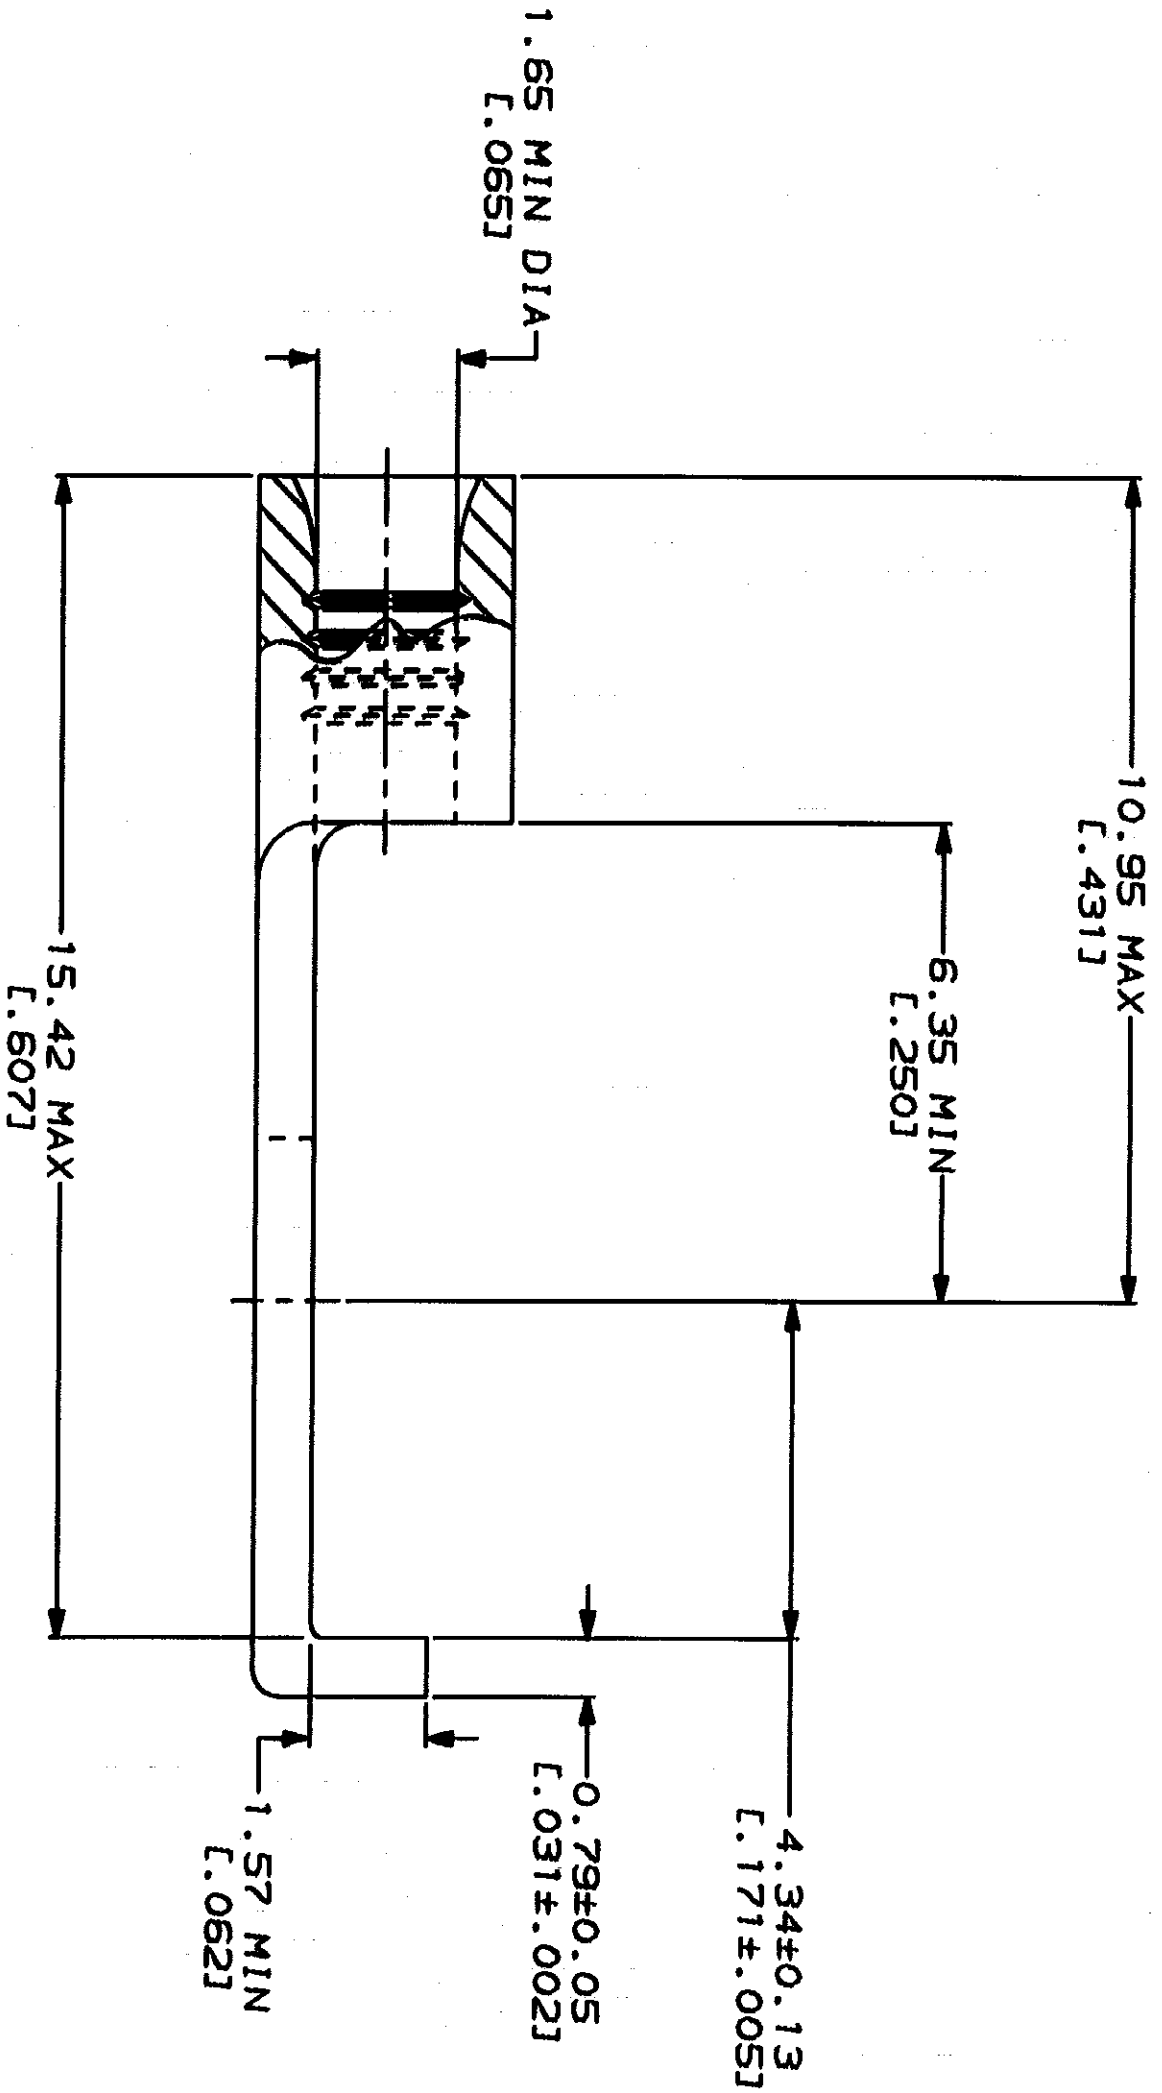

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS		MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	1-800-522-6752	VOLTAGE RATING: NOT APPLICABLE	
FOR APPLICATION TOOLING INFORMATION	1-800-722-1111	WIRE CROSS SECTIONAL AREA RANGE: 0.26-1.65mm² (509-3,260) CIR MILS STRAINED	
FOR ORDER ENTRY	1-800-526-5142		

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN - - - - - TOLERANCES ON: 2 PLG DEC ± 3 PLG DEC ± ANGLES		DR 3-2-93 1A BIRKMAN CHK 3-2-93 DA PATTERSON APPD 3-2-93 DE MILLER APPD 3-2-93 JL HECKLEY PRODUCT SPEC		NAME AMP Incorporated Harrisburg, PA 17105-3608	
FINISH TIN PLATE 0.0025±L.000100J MIN TKR PER MIL-T-10727		APPLICATION SPEC		TERMINAL, FLANGED SPADE, BUDGET	
WEIGHT		SCALE 10:1		SHEET 1 OF 1	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[32494](#)