


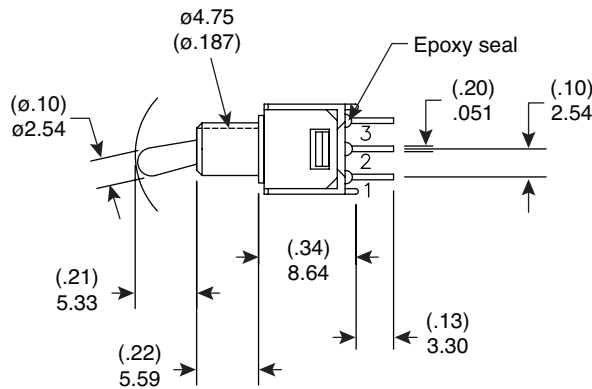



Dimensions: mm (in.)



P.C. Mounting



**Mechanical Specifications:**

- Mechanical Life: 30,000 make-and-break cycles
- Operating Temperature: -30°C to 85°C

**Electrical Specifications:**

- Rating: 1A / 250VAC, 3A / 120 VAC or 28 VDC
- Contact Resistance: 20mΩ max. initial @ 2-4VDC 100mA
- Insulation Resistance: 1,000MΩ min.
- Dielectric Strength: 1,000 V RMS@sea level

**Materials:**

- Case: Diallyl phthalate (DAP)
- Actuator: Brass, chrome plated
- Bushing: Brass, nickel plated
- Housing: Stainless Steel
- Switch Support: Brass, tin plated
- Terminals/Contact: Brass, with silver plating

**Note:**

- RoHS compliant by exemption
- 108-0050-EVX omit 2nd terminal

Mouser Stock No.	Type	Circuit
108-0050-EVX	2P SPST	On-Off
108-0051-EVX	3P SPDT	On-On

**Sub-Miniature Toggle Switches**

108-0050-EVX, 108-0051-EVX



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mountain Switch:](#)

[108-0051-EVX](#) [108-0050-EVX](#)