


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED PER ECO-11-004820	11MAR11	RK	HMR

1. ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
2. TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
3. THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
4. HOUSING: FLAME RETARDANT THERMOPLASTIC; COLOR: BLACK.
5. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
6. FINISH: 0.000381 [.000015] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.

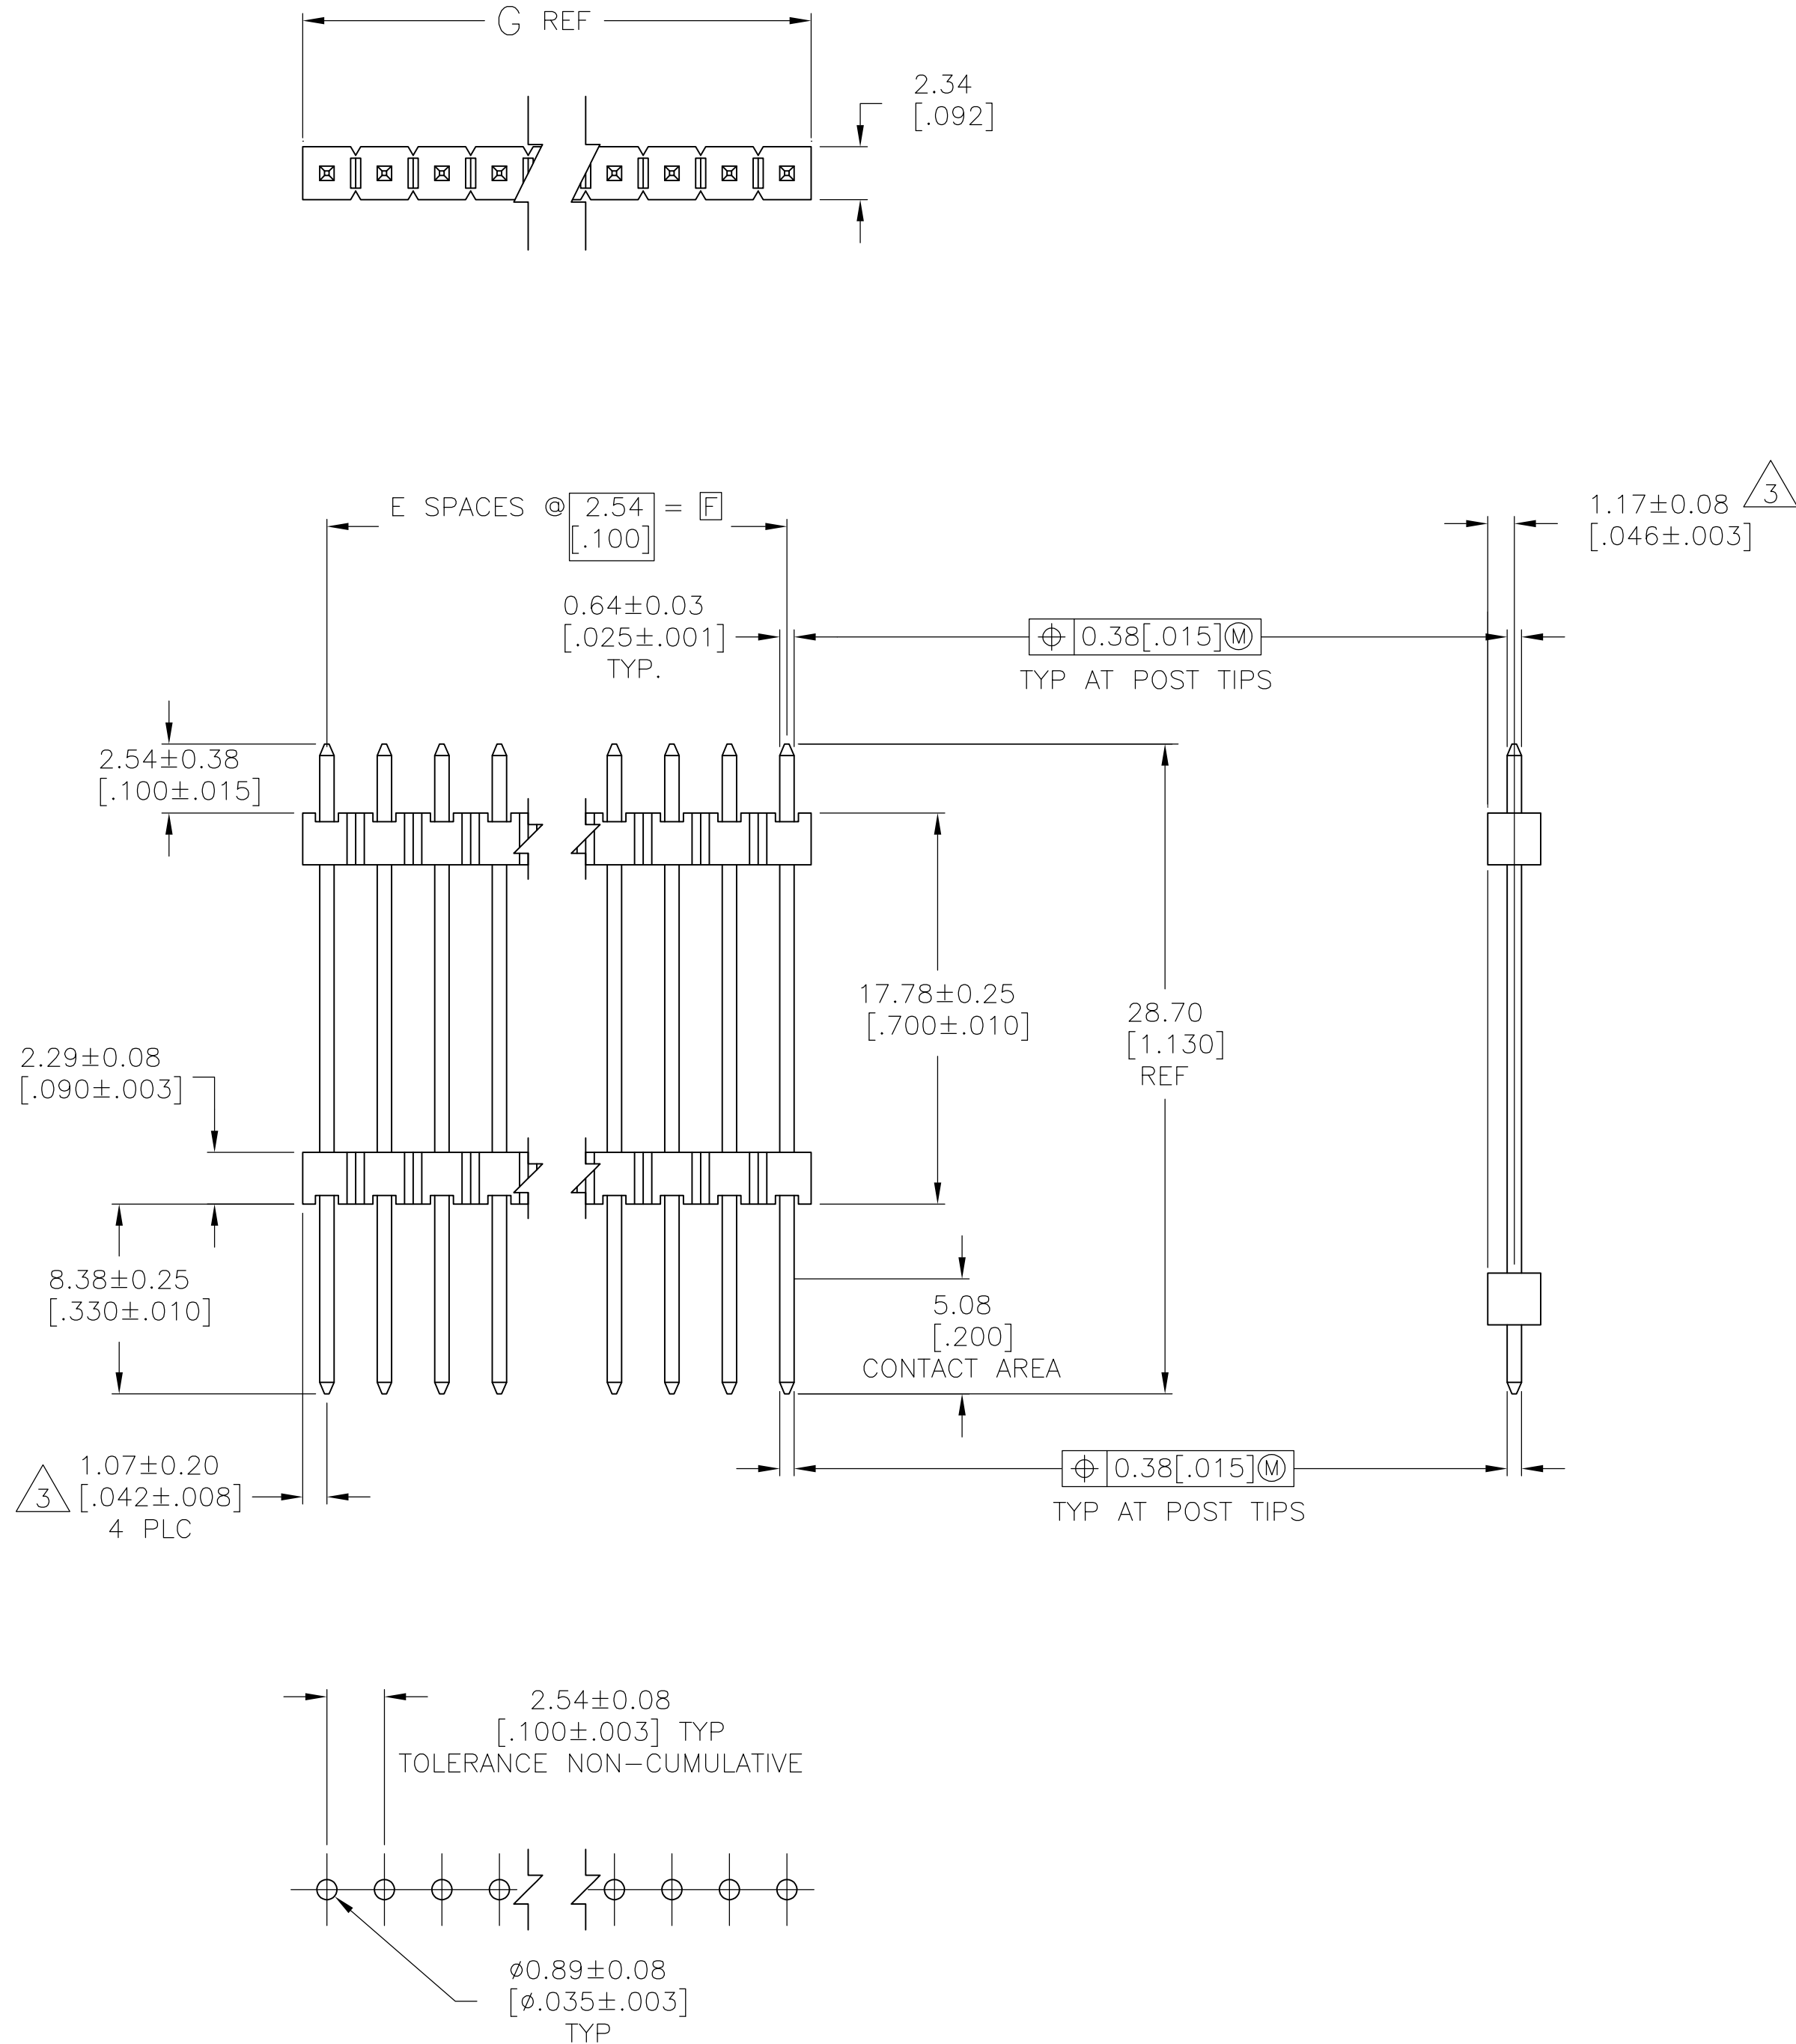

RECOMMENDED HOLE LAYOUT

5	101.19 [3.984]	99.06 [3.900]	39	40	4-146472-0
	98.65 [3.884]	96.52 [3.800]	38	39	3-146472-9
	96.11 [3.784]	93.98 [3.700]	37	38	3-146472-8
	93.57 [3.684]	91.44 [3.600]	36	37	3-146472-7
	91.03 [3.584]	88.90 [3.500]	35	36	3-146472-6
	88.49 [3.484]	86.36 [3.400]	34	35	3-146472-5
	85.95 [3.384]	83.82 [3.300]	33	34	3-146472-4
	83.41 [3.284]	81.28 [3.200]	32	33	3-146472-3
	80.87 [3.184]	78.74 [3.100]	31	32	3-146472-2
	78.33 [3.084]	76.20 [3.000]	30	31	3-146472-1
	75.79 [2.984]	73.66 [2.900]	29	30	3-146472-0
	73.25 [2.884]	71.12 [2.800]	28	29	2-146472-9
	70.71 [2.784]	68.58 [2.700]	27	28	2-146472-8
	68.17 [2.684]	66.04 [2.600]	26	27	2-146472-7
	65.63 [2.584]	63.50 [2.500]	25	26	2-146472-6
	63.09 [2.484]	60.96 [2.400]	24	25	2-146472-5
	60.55 [2.384]	58.42 [2.300]	23	24	2-146472-4
	58.01 [2.284]	55.88 [2.200]	22	23	2-146472-3
	55.47 [2.184]	53.34 [2.100]	21	22	2-146472-2
	52.93 [2.084]	50.80 [2.000]	20	21	2-146472-1
	50.39 [1.984]	48.26 [1.900]	19	20	2-146472-0
	47.85 [1.884]	45.72 [1.800]	18	19	1-146472-9
	45.31 [1.784]	43.18 [1.700]	17	18	1-146472-8
	42.77 [1.684]	40.64 [1.600]	16	17	1-146472-7
	40.23 [1.584]	38.10 [1.500]	15	16	1-146472-6
	37.69 [1.484]	35.56 [1.400]	14	15	1-146472-5
	35.15 [1.384]	33.02 [1.300]	13	14	1-146472-4
	32.61 [1.284]	30.48 [1.200]	12	13	1-146472-3
	30.07 [1.184]	27.94 [1.100]	11	12	1-146472-2
	27.53 [1.084]	25.40 [1.000]	10	11	1-146472-1
	24.99 [.984]	22.86 [.900]	9	10	1-146472-0
	22.45 [.884]	20.32 [.800]	8	9	146472-9
	19.91 [.784]	17.78 [.700]	7	8	146472-8
	17.37 [.684]	15.24 [.600]	6	7	146472-7
	14.83 [.584]	12.70 [.500]	5	6	146472-6
	12.29 [.484]	10.16 [.400]	4	5	146472-5
9.75 [.384]	7.62 [.300]	3	4	146472-4	
7.21 [.284]	5.08 [.200]	2	3	146472-3	
4.67 [.184]	2.54 [.100]	1	2	146472-2	
2.13 [.084]	— —	—	1	146472-1	
PLATING	G	F	E	NO. OF POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN E.C. BRANDBERG		13MAR97	 TE Connectivity	
DIMENSIONS: mm [INCHES]		G. GUBNICZKI		13MAR97		
		G. GUBNICZKI		13MAR97		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPRO G. GUBNICZKI		13MAR97	NAME	
		PRODUCT SPEC		HEADER ASSEMBLY, MOD II, STACKING, SINGLE ROW, .025 SQ.POST, UNSHROUDED		
APPLICATION SPEC		SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL		WEIGHT		A1	00779	C146472
		SEE TABLE		SCALE: 4:1 SHEET 1 of 2 REV A		
CUSTOMER DRAWING						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-146472-8](#)