Product No.	Dim "LI"	Connector"A" and "B"	Over mold "A" and "B"	SATA Cable	Solder	Remarks
10115006-7SSXXXHLF	XXX±10	SATA 7P Receptacle connector Straight type Housing,Back Cover: Heat resistant resin, Halogen Free, UL94V-0, Color Black Contact: Copper Alloy Contact Area:Gold plating over Ni plating	Heat resistant resin, Halogen Free, UL94V-0, Color Black	80°C 30V AWG30 Halogen Free,VW-1, with F mark, Color Black	Sn96.5-Ag3.0-Cu0.5 Lead Free	For Product No. composition, see NOTE 7.

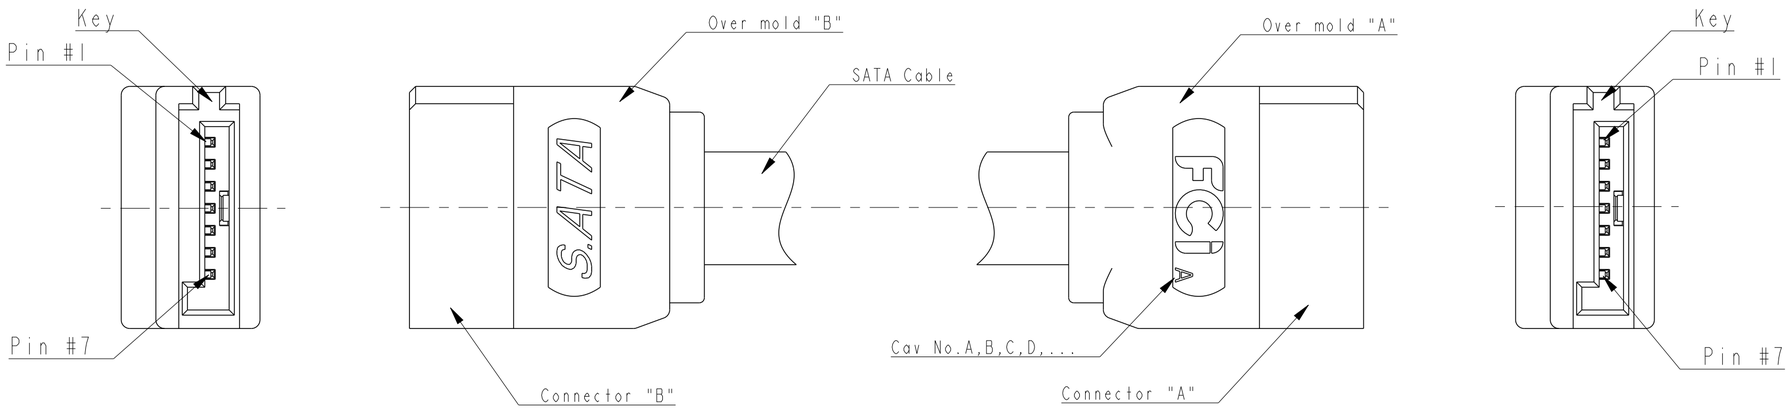

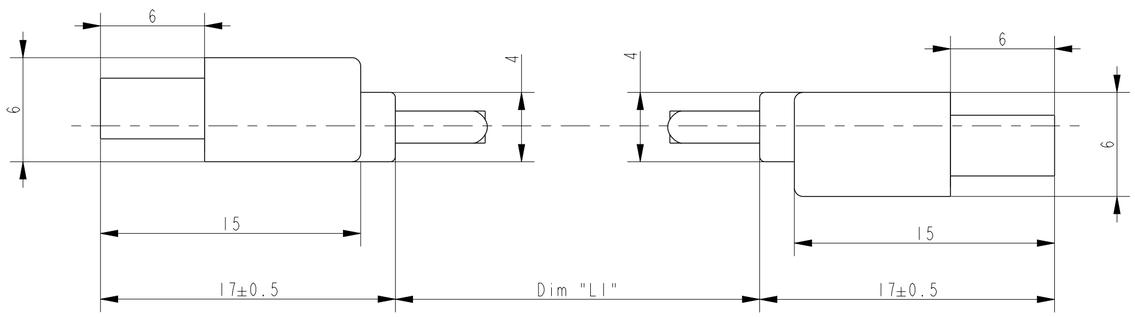

NOTE)

1)This product is based on Serial ATA Revision 3.0.
2)This product is manufactured by soldering process.
3)About the Dim"LI" length, please inquire to sales person in our company.
4)Product SPEC:GS-12-672
5)Package SPEC:GS-14-1056
6)Application SPEC:GS-20-138
7)Product No. composition

10115006 - 7 S S XXX H LF

- Lead Free
- Halogen Free
- Cable Length:Dim "LI"
- SATA Connector Type (S:Straight,R:Right-angle)
- SATA Connector Type (S:Straight,R:Right-angle)
- SATA Connector Position

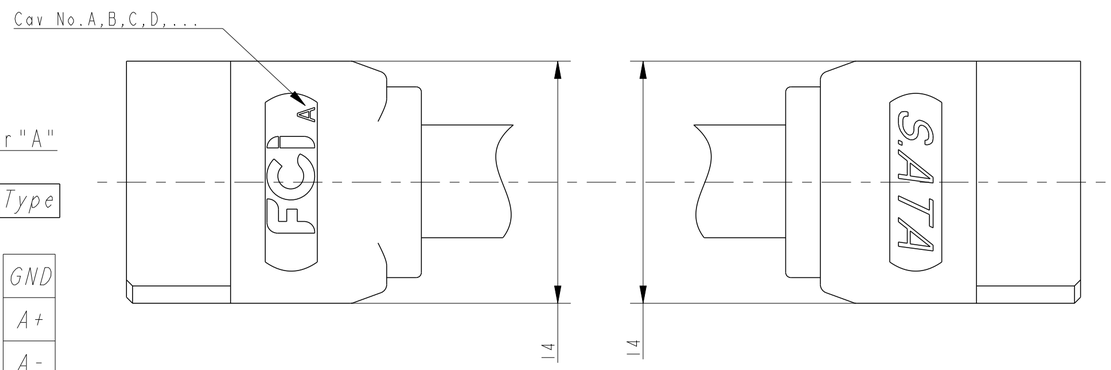

Wiring Table:

Pin Assigment

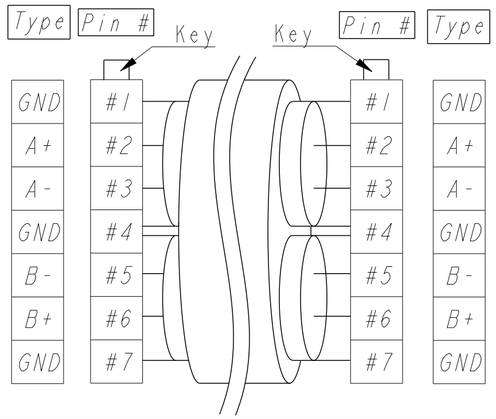

spec ref			dr	T Ishishita	2011/09/30	projection	MM
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	T Ishishita	2015/05/11		
			chr	-	-		
			appr	Naotaka Sasame	2015/05/12	product family	
surface ✓	linear	0.X	±0.4	FCI	title: SATA 7P Signal Cable Harness Straight/Straight Lowpro	dwg no: 10115006	rev: C
		0.XX	±0.4				
		0.XXX	±0.4				
ISO 1302	angular	0°	±4°	www.fci.com	cat. no.	Product - Customer Drw	sheet 1 of 1

size	scale	ecn no	rel level
A2	4.000	ELX-J-20855-1	Released

Copyright FCI.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol:

10115006-7SS070HLF 10115006-7SS146HLF 10115006-7SS500HLF