

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


Part Number: [0705519040](#)
Status: **Active**
Overview: [SL Modular Connectors](#)
Description: 2.54mm Pitch SL Header, Single Row, Right Angle, 3.05mm Pocket, Shrouded, with Latch and Split Pegs, 6 Circuits, 0.38µm Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating

Documents:
[3D Model](#)
[Drawing \(PDF\)](#)
[Product Specification PS-70400-001 \(PDF\)](#)
[Product Specification PS-70541-001 \(PDF\)](#)
[Product Specification TS-70541-001-001 \(PDF\)](#)
[Product Specification TS-70541-100-001 \(PDF\)](#)
[Packaging Specification PK-70873-0015 \(PDF\)](#)
[RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification
CSA LR19980
UL E29179

General
Product Family PCB Headers
Series [70551](#)
Application Signal, Wire-to-Board
Overview [SL Modular Connectors](#)
Product Name SL
UPC 822350345521

Physical
Breakaway No
Circuits (Loaded) 6
Circuits (maximum) 6
Color - Resin Black
Durability (mating cycles max) 50
First Mate / Last Break No
Flammability 94V-0
Glow-Wire Capable No
Guide to Mating Part No
Keying to Mating Part None
Lock to Mating Part Yes
Material - Metal Brass, Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin High Temperature Thermoplastic
Net Weight 1.413/g
Number of Rows 1
Orientation Right Angle
PC Tail Length 3.30mm
PCB Locator Yes
PCB Retention Yes
PCB Thickness - Recommended 1.60mm
Packaging Type Tube
Pitch - Mating Interface 2.54mm
Plating min - Mating 0.381µm
Plating min - Termination 1.905µm
Polarized to Mating Part Yes
Shrouded Fully
Stackable No
Temperature Range - Operating -40°C to +105°C
Termination Interface: Style Through Hole

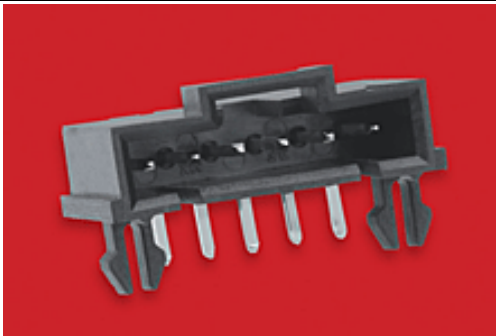

Series image - Reference only

EU ELV
Not Reviewed

EU RoHS **China RoHS**
Not Reviewed
REACH SVHC
Not Reviewed
Halogen-Free
Status
Not Reviewed
Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Not Reviewed
ELV	Not Reviewed
RoHS Phthalates	Not Reviewed

Search Parts in this Series
[70551](#) Series

Mates With
SL Crimp Housing [70066](#) , [70430](#) , [70400](#)

Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers

Packaging Specification	PK-70873-0015
Product Specification	PS-70400-001, PS-70541-001, TS-70541-001-001, TS-70541-100-001
Sales Drawing	SD-70551-001

This document was generated on 03/02/2018

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[70551-9040](#)