

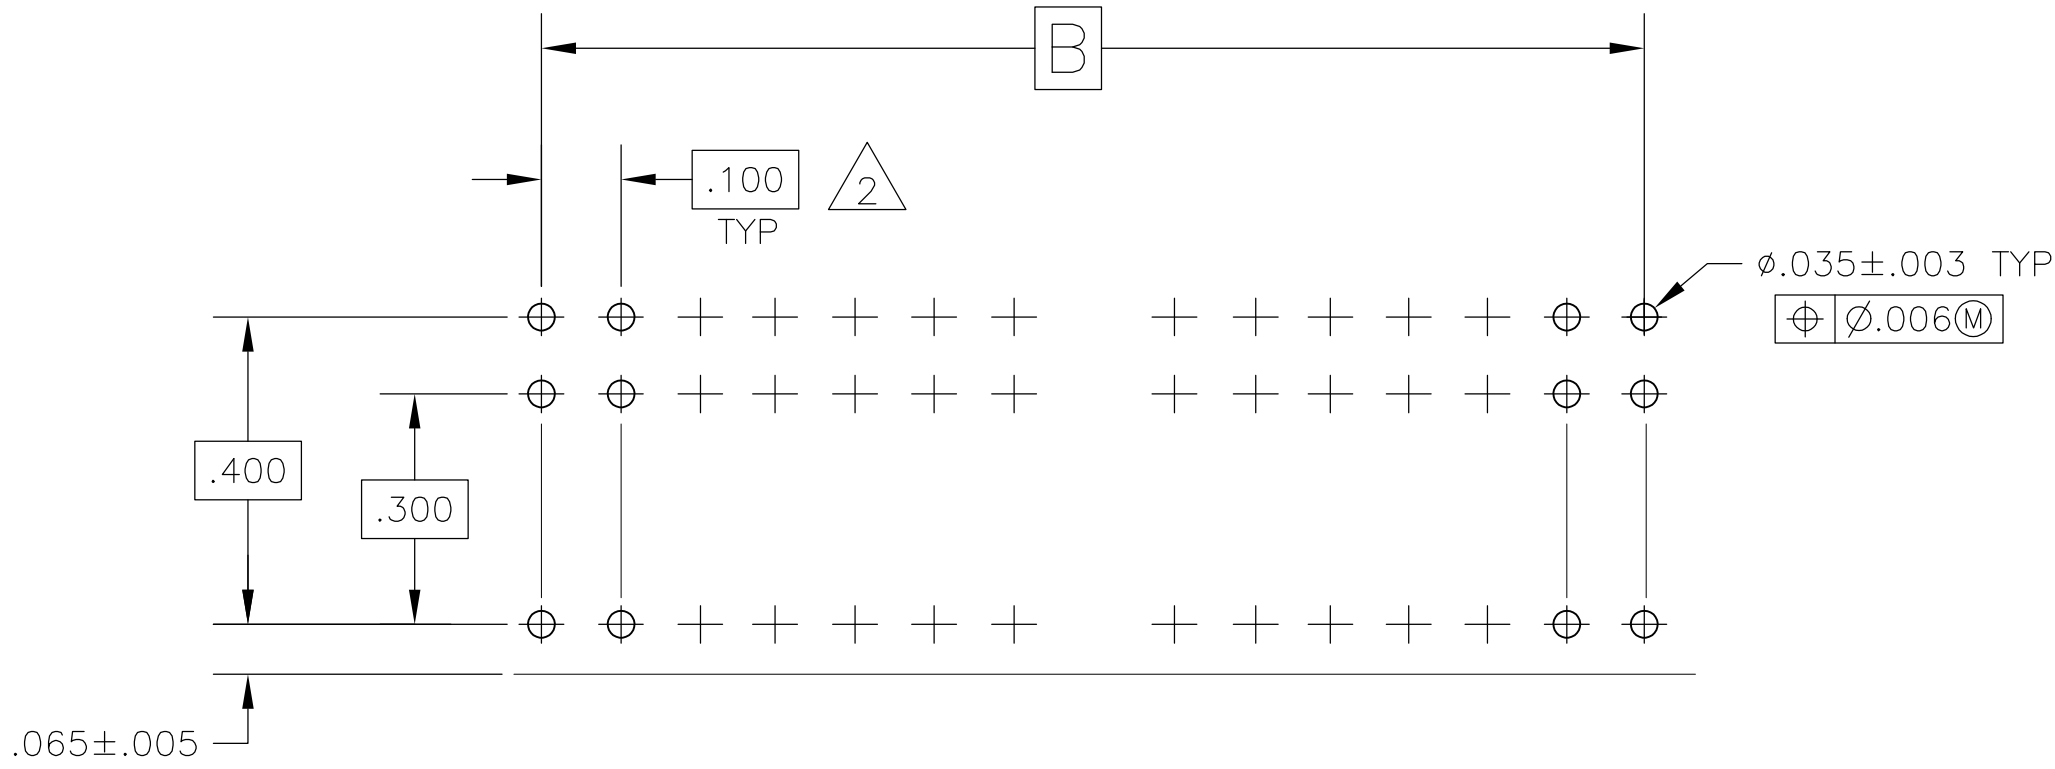
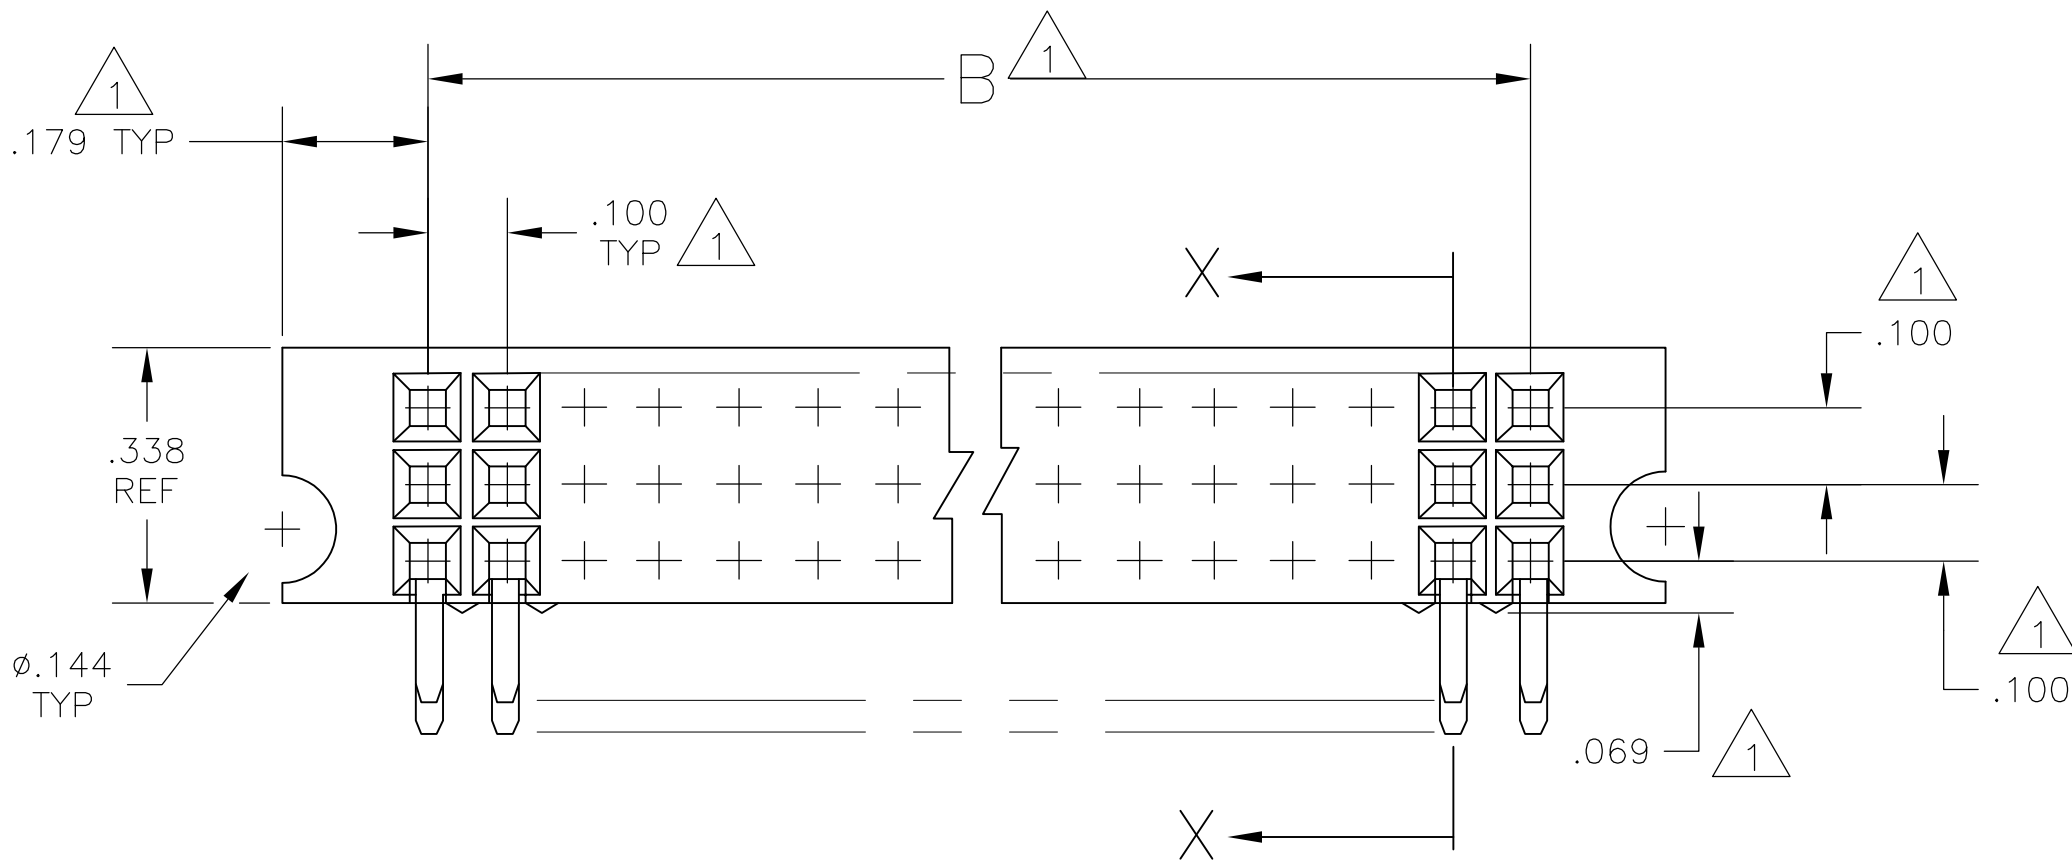


LOC		DIST		REVISIONS					
AD	OO	P	LTR	DESCRIPTION		DATE	DWN	APVD	
			N1	ECO 06 016393		31AUG06	BSV	JO	
			N2	REVISED PER ECO-10-000443		12JAN10	KK	AEG	


- 1 THESE DIMENSION PERTAIN TO CAVITY CENTRERLINES--NOT TO CONTACT LOCATIONS.
- 2 TOLERANCE NON-CUMULATIVE
- 3 POINT OF MEASUREMENT FOR PLATING THICKNESS (MEASURED INSIDE CONTACT BEAMS).
- 4 "AMP", "PART NUMBER", "DATA CODE", THE WORD "FRONT" AND "CSA", MARKED WITH .062 HIGH CHARACTERS. 21 POS. AND SMALLER, FRONT IDENTIFIED WITH"↓" (ARROW)
- 5 HOUSING :POLYPHENYLENE SULFIDE GLASS FILLED.
- 6 CONTACT: PHOS.BRONZE
- 7 CONTACT:.00030 GOLD IN CONTACT AREA, .00050-.0010 BRIGHT TIN--LEAD ON SOLDER TINES, ALL OVER .000050 NICKEL.
- 8 OBSOLETE PART NUMBER
- 9 PRELIMINARY PART--NOT RELEASED FOR PRODUCTION.
- 10 CONTACT: .000030 GOLD IN CONTACT AREA, .000050-.000100 MATTE TIN ON SOLDER LEADS, ALL OVER .000050 NICKEL.
- 11 ROHS 2002/95/EC COMPLIANT.
- 12 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

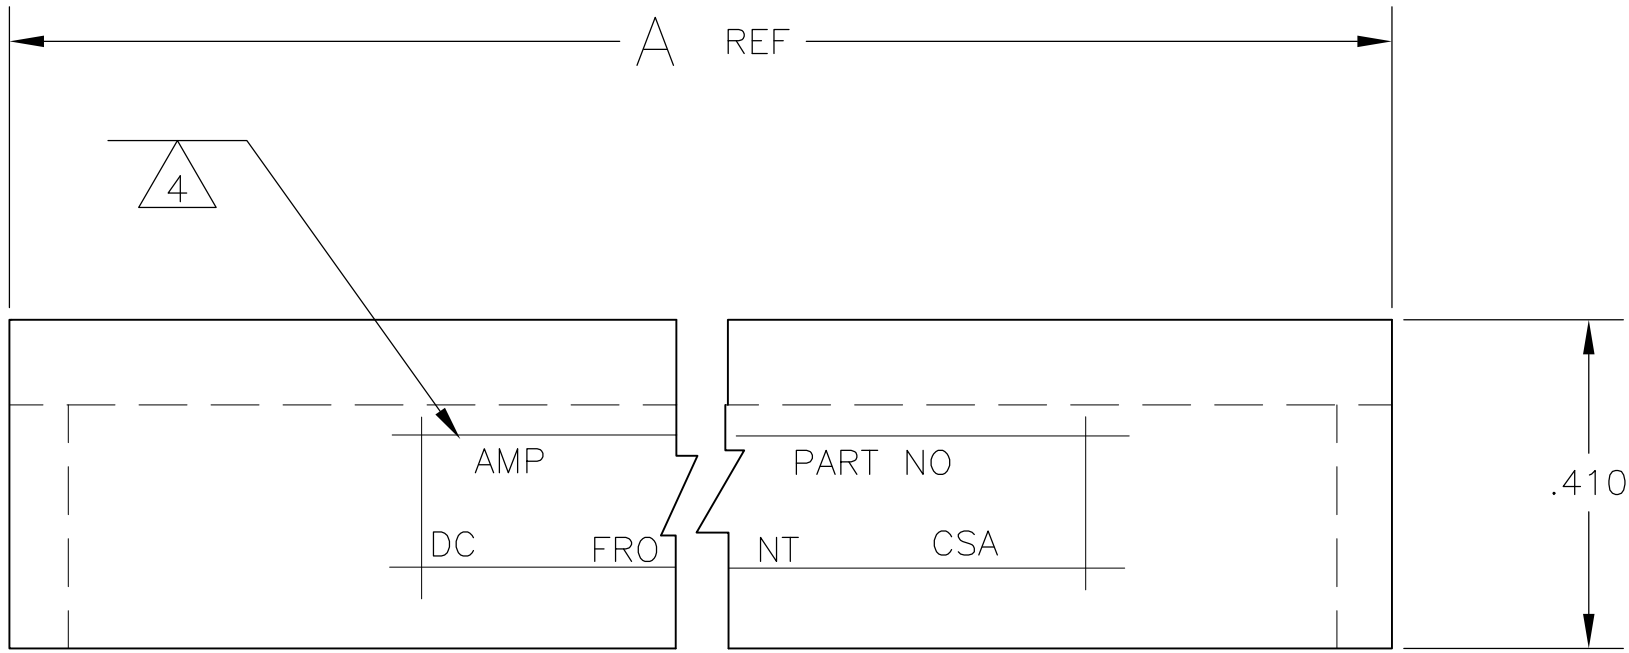

RECOMMENDED P.C. BOARD LAYOUT

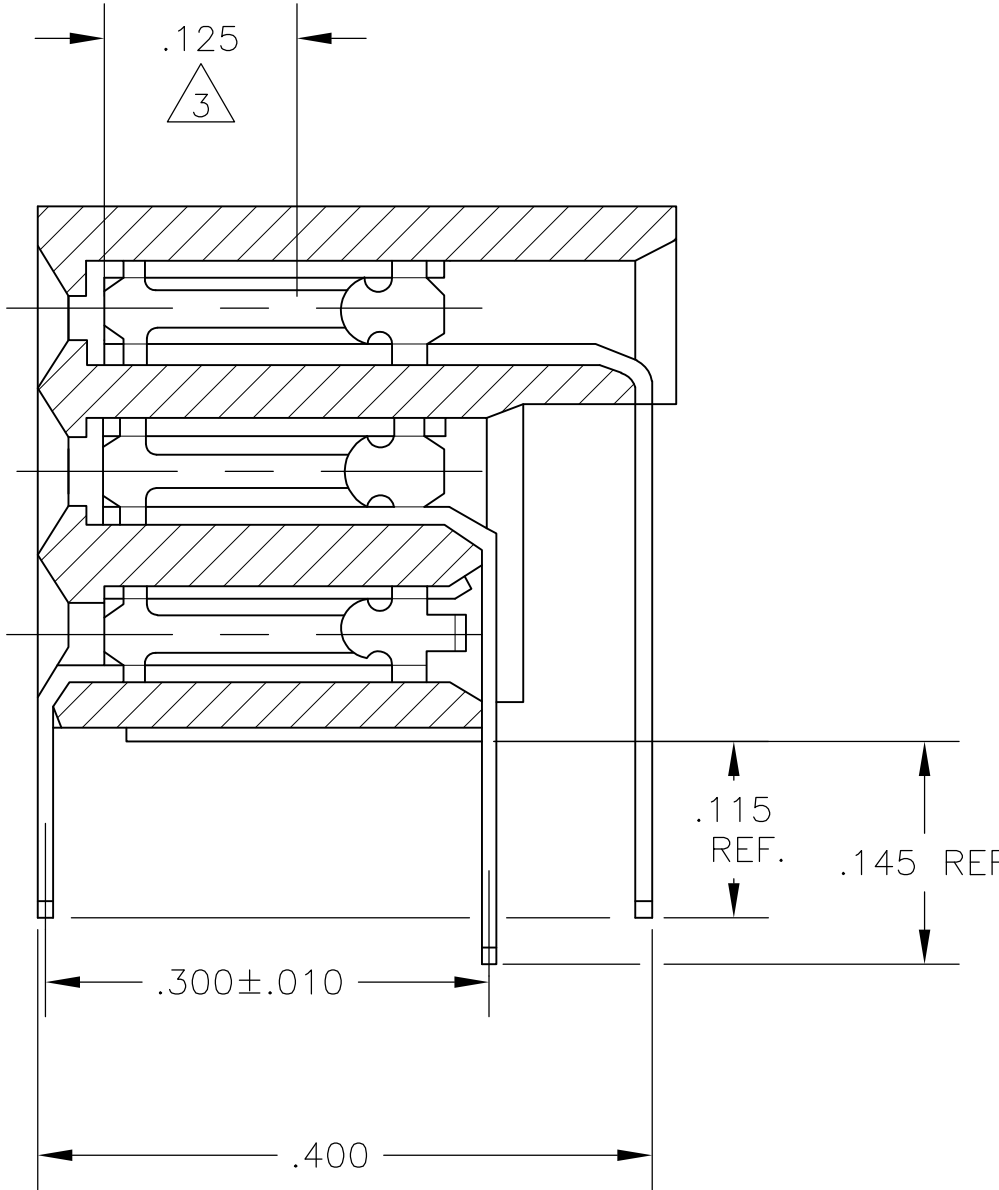

1	OBSOLETE	2.000	2.058	54	-6-534974-8-
1	OBSOLETE	1.900	1.958	51	-6-534974-7-
1	OBSOLETE	1.500	1.858	48	-6-534974-6-
1	OBSOLETE	1.400	1.758	45	-6-534974-5-
1	OBSOLETE	1.100	1.458	36	-6-534974-4-
1	OBSOLETE	1.300	1.658	42	6-534974-3
1	OBSOLETE	9.900	10.258	300	-6-534974-2-
1	OBSOLETE	6.900	7.258	210	-6-534974-1-
1	OBSOLETE	4.900	5.258	150	5-534974-8
1	OBSOLETE	3.100	3.458	96	-5-534974-5-
1	OBSOLETE	3.000	3.358	93	-5-534974-4-
1	OBSOLETE	2.300	2.658	72	5-534974-3
1	OBSOLETE	2.000	2.058	54	1-534974-8
1	OBSOLETE	1.900	1.958	51	1-534974-7
12	OBSOLETE	1.500	1.858	48	1-534974-6-
1	OBSOLETE	1.400	1.758	45	1-534974-5
1	OBSOLETE	1.100	1.458	36	1- 8 -4
1	OBSOLETE	1.300	1.658	42	1-534974-3
12	OBSOLETE	9.900	10.258	300	1-534974-2-
12	OBSOLETE	6.900	7.258	210	1- 8 -1
1	OBSOLETE	6.700	7.058	204	1- 8 -0
1	OBSOLETE	6.400	6.758	195	8 -9
1	OBSOLETE	4.900	5.258	150	-8
1	OBSOLETE	3.900	4.258	120	8 -7
1	OBSOLETE	3.400	3.758	105	8 -6
12	OBSOLETE	3.100	3.458	96	-5
1	OBSOLETE	3.000	3.358	93	-4
1	OBSOLETE	2.300	2.658	72	-3
1	OBSOLETE	1.900	2.258	60	8 -2
1	OBSOLETE	.900	1.258	30	8 -1
FINISH		B	A	NO POS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. SMITH 27JUL87	 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK DOUGLAS R. SARVER 27JUL87	NAME DOUGLAS R. SARVER	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD DOUGLAS R. SARVER 27JUL87	PRODUCT SPEC	
		APPLICATION SPEC		RECEPTACLE ASSEMBLY, MOD. II, CLOSED ENTRY, WITH GUIDE PIN EARS
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -		—		
MATERIAL		WEIGHT — —		RESTRICTED TO —
FINISH		SCALE		SHEET 1 OF 1 REV N2
		CUSTOMER DRAWING		
		A1 00779 ©534974		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[6-534974-3](#)