

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

---

© COPYRIGHT - By -




ALL RIGHTS RESERVED.

LOC  
FB

DIST  
00


REVISIONS

| P  | LTR     | DESCRIPTION   | DATE    | DWN | APVD |
|----|---------|---------------|---------|-----|------|
| P1 | REVISED | ECR-14-006619 | 13MAY14 | T.Q | W.H  |

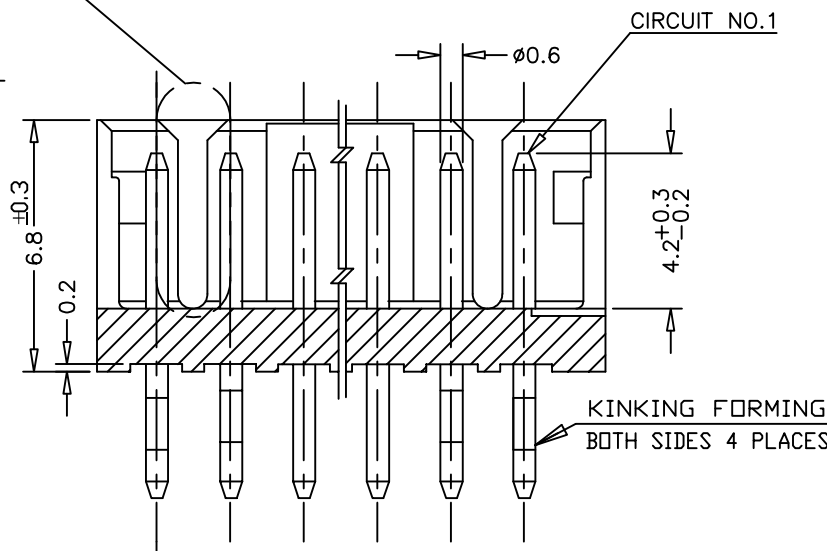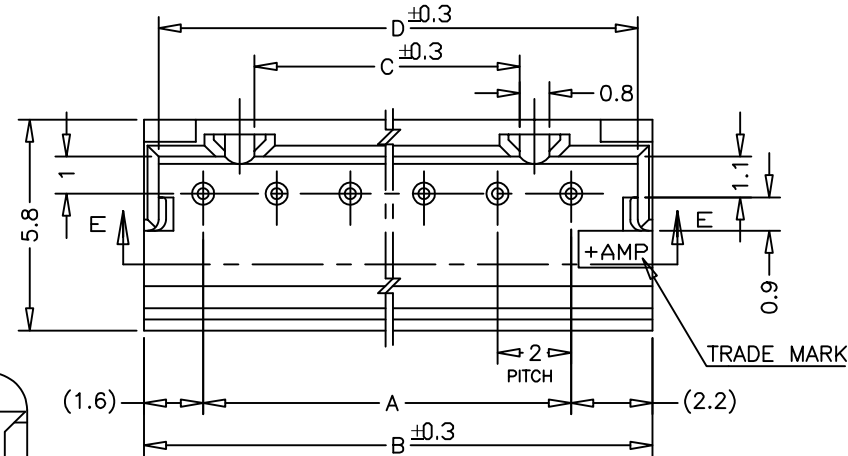


SECT E-E

5~15 POS.

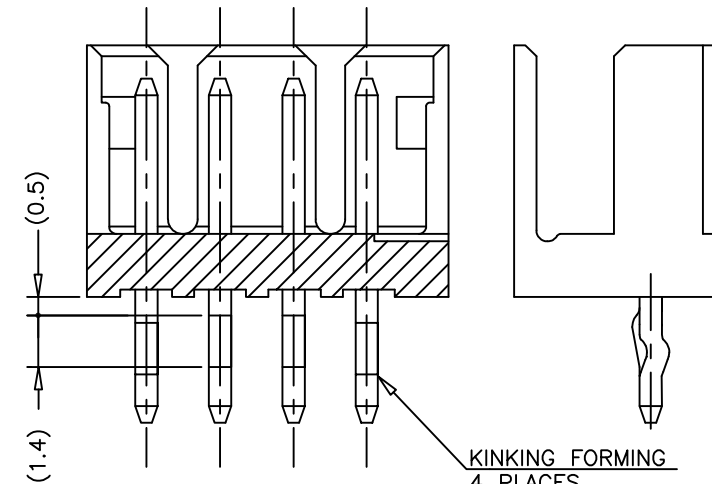


SECT E-E

4 POS.

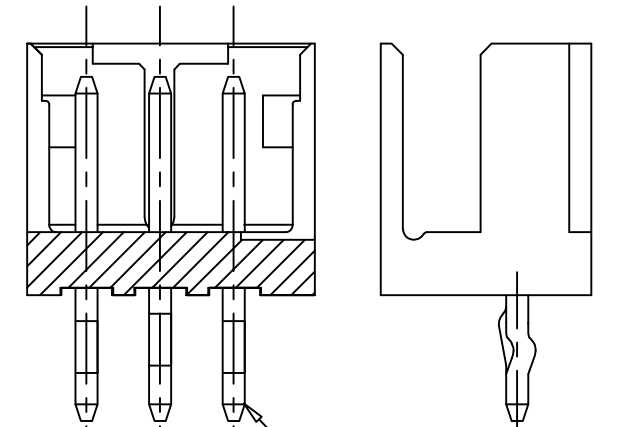


SECT E-E

KINKING FORMING  
3 PLACES  
3 POS.

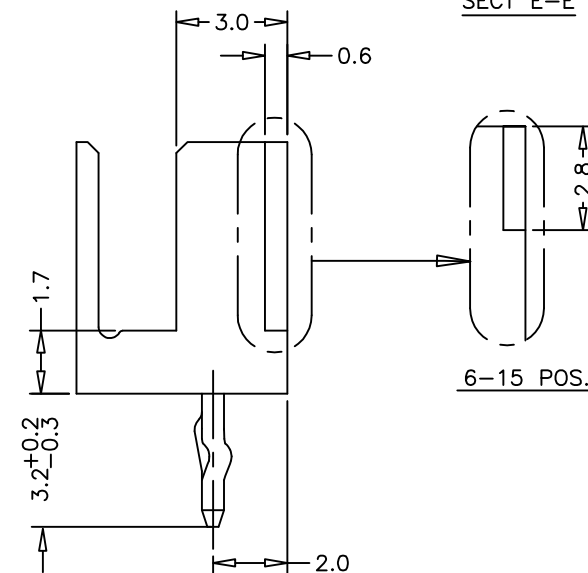

6-15 POS.

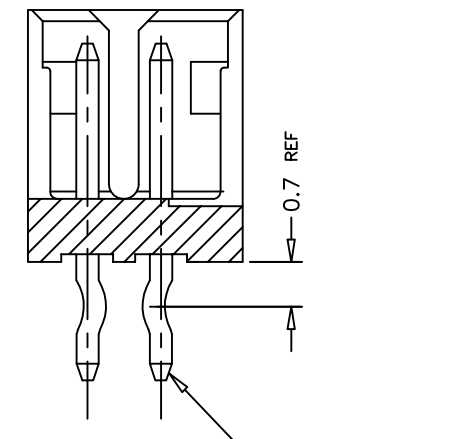


2 POS.  
SECT E-E

KINKING FORMING  
2 PLACES

- NOTES:
- 1 MATERIAL : HOUSING-66 NYLON (UL94V-0)  
POST -GOLD-PLT BRASS
  - 2 APPLICABLE RECEPTACLE : P/N 176392

|                    |            |      |    |      |      |      |
|--------------------|------------|------|----|------|------|------|
| NATURAL<br>(WHITE) | 1-292134-5 | 15   | 28 | 31.8 | 25.2 | 31.0 |
|                    | 1-2        | 12   | 22 | 25.8 | 19.2 | 25.0 |
|                    | 1-0        | 10   | 18 | 21.8 | 15.2 | 21.0 |
|                    | -9         | 9    | 16 | 19.8 | 13.2 | 19.0 |
|                    | -6         | 6    | 10 | 13.8 | 7.2  | 13.0 |
|                    | -5         | 5    | 8  | 11.8 | 5.2  | 11.0 |
|                    | -4         | 4    | 6  | 9.8  | 3.2  | 9.0  |
|                    | -3         | 3    | 4  | 7.8  | —    | 7.0  |
|                    | 292134-2   | 2    | 2  | 5.8  | —    | 5.0  |
| COLOR              | P/N        | POS. | A  | B    | C    | D    |

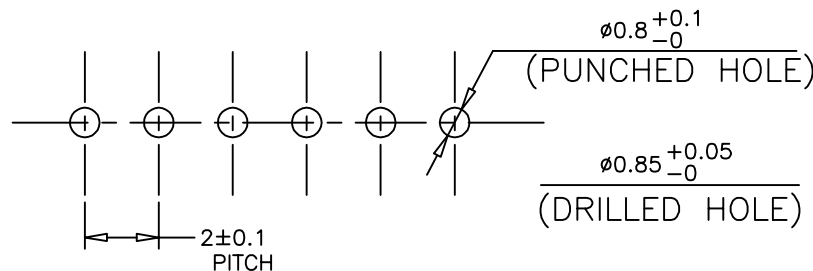

NOT ACCUMULATED TOLERANCE

RECOMMENDABLE P.C. BOARD LAYOUT  
(PCB THK : 0.8-1.6)

|                                                                 |  |                             |                                                                         |                 |                    |                        |
|-----------------------------------------------------------------|--|-----------------------------|-------------------------------------------------------------------------|-----------------|--------------------|------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                          |  | DWN<br>S.XU<br>31JAN03      | <b>TE</b> TE Connectivity                                               |                 |                    |                        |
| DIMENSIONS:<br>mm                                               |  | CHK<br>S.YAO<br>31JAN03     |                                                                         |                 |                    |                        |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:<br>±0.2                  |  | APVD<br>T.SASAKI<br>31JAN03 | NAME                                                                    |                 |                    |                        |
| 0-PLC ±<br>1-PLC ±<br>2-PLC ±<br>3-PLC ±<br>4-PLC ±<br>ANGLES ± |  | PRODUCT SPEC<br>108-60016   | POST HEADER ASS'Y (BOX-V)<br>GOLD PLT TYPE (AMP CT CONNECTOR 2mm PITCH) |                 |                    |                        |
| MATERIAL<br>SEE NOTE                                            |  | FINISH<br>SEE NOTE          | APPLICATION SPEC<br>—                                                   | SIZE<br>A3      | CAGE CODE<br>00779 | DRAWING NO<br>C=292134 |
| WEIGHT<br>—                                                     |  |                             | RESTRICTED TO                                                           |                 |                    |                        |
| CUSTOMER DRAWING                                                |  |                             | SCALE<br>5:1                                                            | SHEET<br>1 OF 1 | REV<br>P1          |                        |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[292134-3](#)