THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

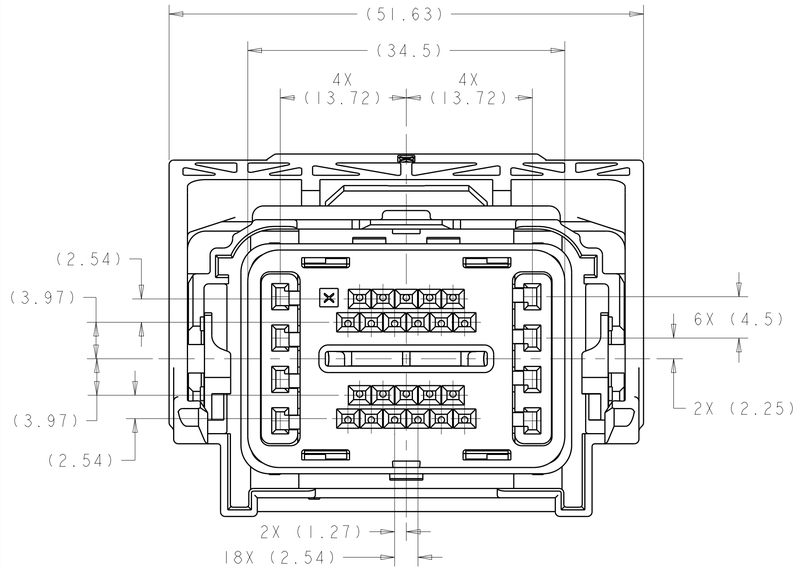

KEYING OPTION "A"
1438083-1 3

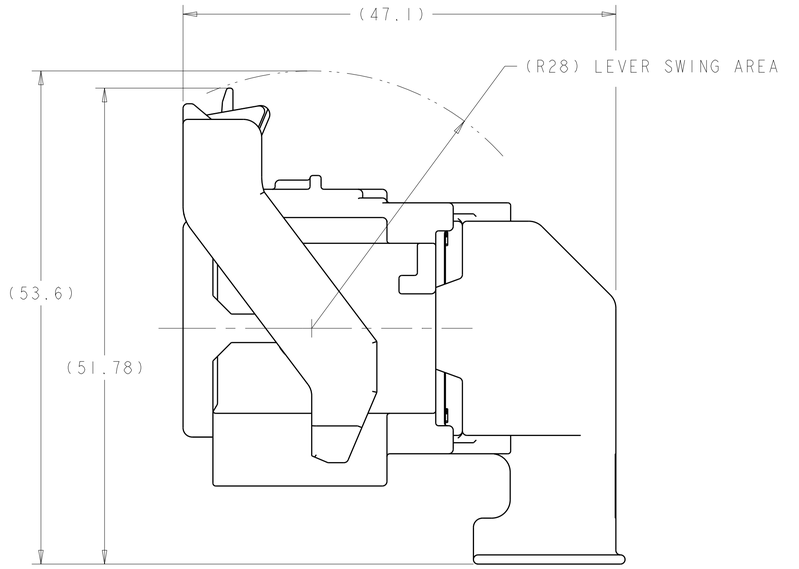

SHOWN WITH CAM LEVER AND SPACER IN LOADED POSITION WITH OPTIONAL WIRESHIELD



SCALE 1:1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H6	REVISED PER ECO-11-018497	09SEP2011	DLD	DCM
	H7	REVISED PER ECO-14-015177	15OCT2014	DLD	DCM
	H8	REVISED PER ECO-15-011500	07AUG2015	DLD	DCM

1. MATERIAL:
   HARNESS - 35% GLASS FILLED PA66, BLACK
   ALT MAT'L - 30% GLASS FILLED sPS, BLACK

   SPACER - 40% GLASS FILLED PPS, RED
   ALT MAT'L - 30% GLASS FILLED sPS, RED

   COVER - 35% GLASS FILLED PA66, BLACK
   ALT MAT'L - 30% GLASS FILLED LCP, BLACK

   CAM LEVER - 35% GLASS FILLED NYLON, GRAY
   GROMMET - SILICONE, BROWN
   PERIMETER SEAL - SILICONE, GREEN

2. CAM LEVER AND SPACER ARE SHIPPED IN PRE-LATCH POSITION.

3. SEE PINOUT CHART FOR CLOSED CIRCUIT CONFIGURATIONS.

4. CAVITIES WITH A NUMERIC SYMBOL INDICATES CLOSED TERMINAL LOCATIONS.
   BLANK CAVITIES INDICATE OPEN TERMINAL HOLE LOCATIONS.

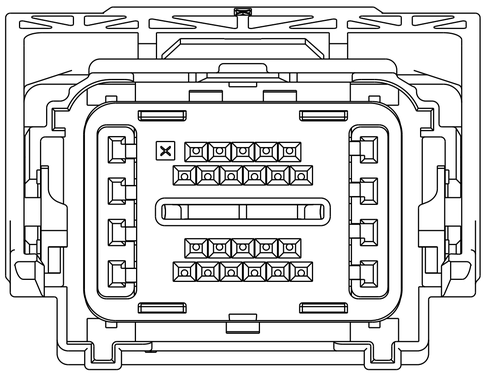

KEYING OPTION "B"
2272926-1 3

CHART FOR CLOSED CIRCUIT CONFIGURATIONS
SHEET 2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±1°

MATERIAL - 1 -

FINISH - -

DWN R. VESTAL 15OCT2003
CHK D. STRAUSSER 15OCT2003
APVD D. STRAUSSER 15OCT2003

PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME PCM HARNESS ASSEMBLY, 30-WAY CONNECTOR

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1438083	-

CUSTOMER DRAWING | SCALE 3:1 | SHEET 1 OF 2 | REV H8

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

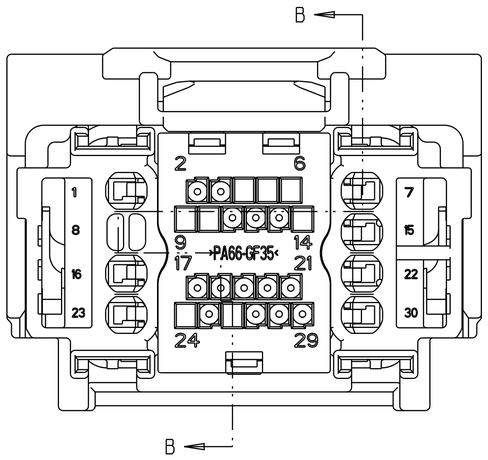

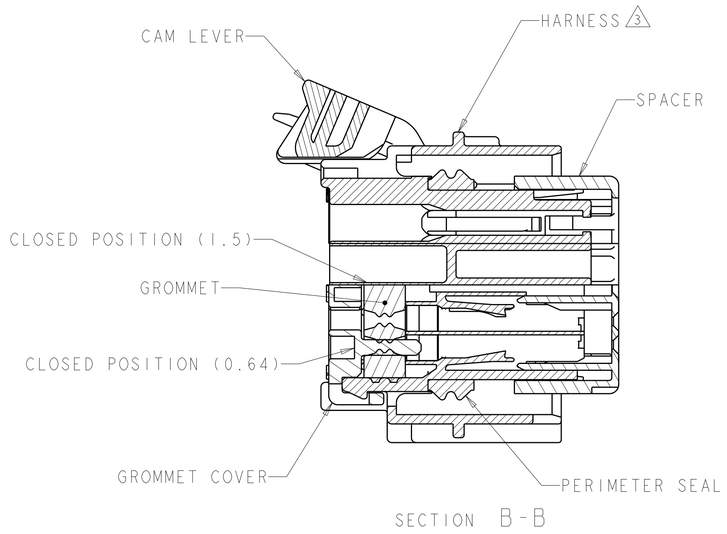

SECTION B-B

30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	PART NUMBER	FORD PART NUMBER

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity:

1-1438083-7