


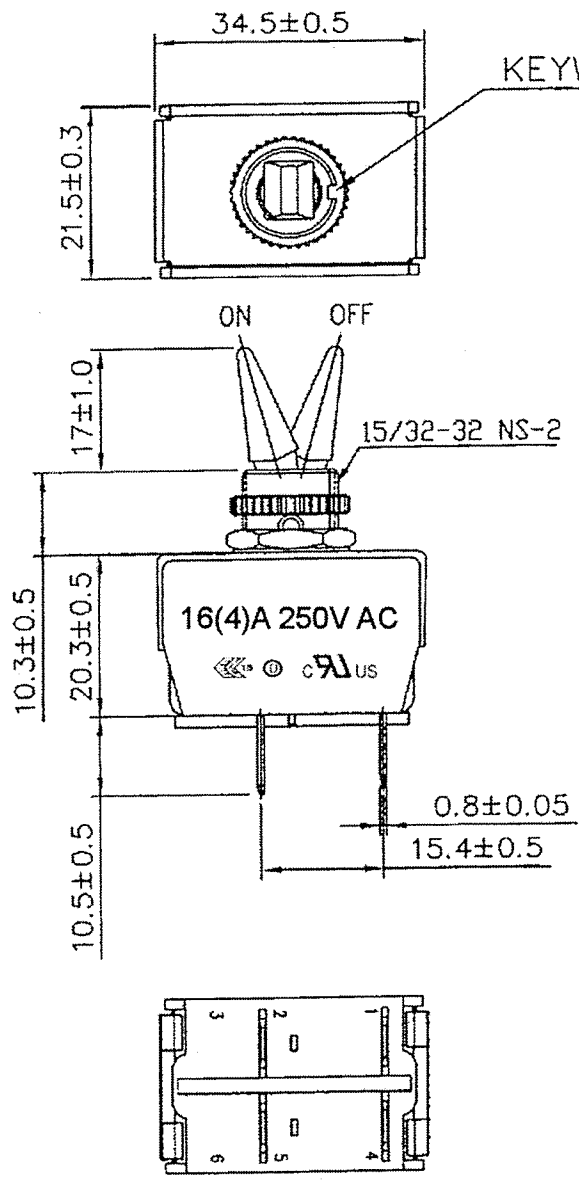
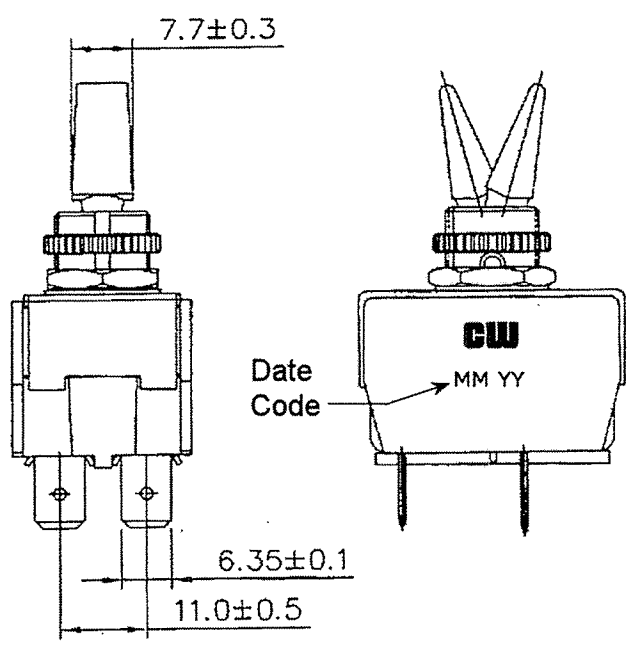


THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO CW INDUSTRIES INCORPORATED AND ITS AFFILIATES. IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN CW INDUSTRIES PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM CW INDUSTRIES INCORPORATED, SOUTHAMPTON, PENNSYLVANIA USA.

Rating	16(4)A 250V AC 	Mounting Hole	Circuit
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Switch Function	4P DPST ON-OFF		
Operation Temp.	0° C ~ 85° C		



**MATERIAL:**  
 Frame: Nylon 66, Black UL Flame: 94-V2  
 Lever: Plastic  
 Cover: PA#66+30%GF A0520  
 UL Flame: 94-V0  
 Terminal: Copper Alloy  
 Contact: Copper Alloy  
 Waterproof: IP56



RoHS Compliant

4 Redrawn. Removed 20A 277vac rating & added 16(4)A 250vac & listings. 8-08-2012

**CW INDUSTRIES**  
 Southampton, Pa. 18966  
 Tel 215.355.7080/www.cwind.com

Date Drawn: 1/28/11	Rev. 4	Unit: mm	Checked By: <i>G. Gold</i>
Title: TOGGLE SWITCH		CW P/N: GTS448F301AHR	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[CW Industries:](#)

[GTS448F301AHR](#)