


RELEASED FOR PUBLICATION


ALL RIGHTS RESERVED

IS DRAWING IS UNPUBLISHED

C) COPYRIGHT 20 BY -

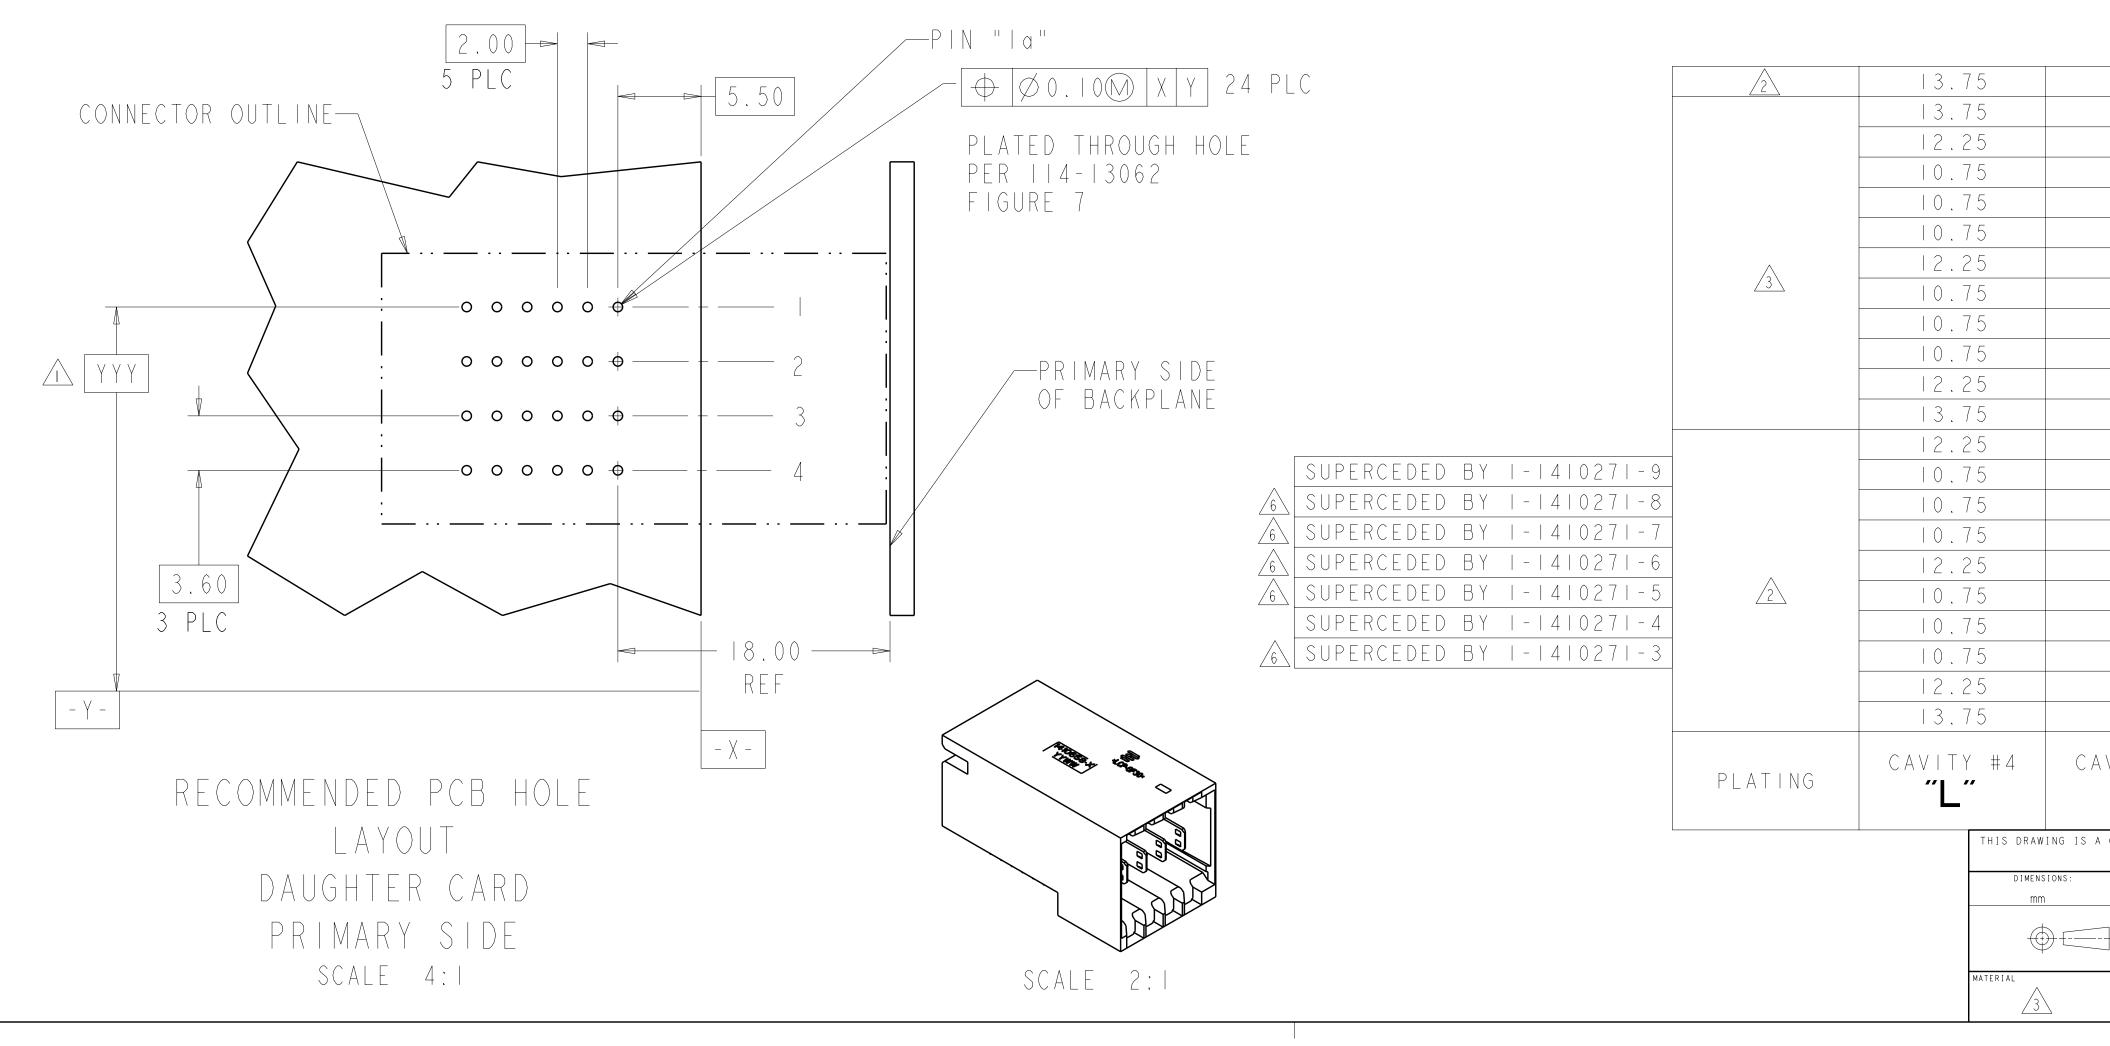

4805 (3/11) Pro/ENGINEER DRAWING

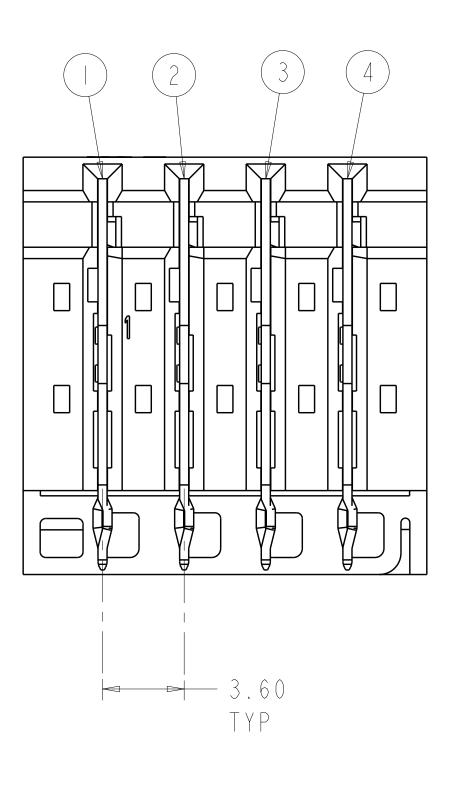

3



5

4

	2					1			
LOC	DIST				REVISIONS				
АD	00	Ρ	LTR		DESCRIPTION		DATE	DWN	APVD
			A 6	REVISED PER	ECO-12-001132		24APR2012	КН	AS

- △ DIMENSIONS PER CUSTOMER BOARD LAYOUT
- FINISH: I.27µM MIN GOLD IN CONTACT AREA, I.27µM MIN TIN-LEAD ON PCB TAIL, OVER I.27µM MIN NICKEL OVER ALL.
- \bigcirc FINISH: 1.27 μ M MIN GOLD IN CONTACT AREA, 1.27 μ M MIN TIN ON PCB TAIL, OVER I.27 MMIN NICKEL OVER ALL.

С

- 4. HOUSING: LCP, UL94V-0, BLACK CONTACT: PHOŚPHOR BRONZE
- 🙆 OBSOLETE PART NUMBER.

	3.75	12.25	12.25	2 - 4 0 2 7 - 2	
	3.75	12.25	12.25	2 - 4 0 2 7 -	
	0.75	10.75	12.25	2 - 4 0 2 7 - 0	
	2.25	13.75	10.75	- 4 027 -9	
	0.75	10.75	10.75	- 4 027 -8	
	2.25	12.25	10.75	- 4 027 -7	
	2.25	12.25	12.25	- 4 027 -6	
	2.25	13.75	12.25	- 4 027 -5	В
	3.75	13.75	10.75	- 4 027 -4	
	3.75	13.75	12.25	- 4 027 -3	
	3.75	13.75	12.25	- 4 027 -2	
	3.75	13.75	13.75	- 4 027 -	
	0.75	10.75	12.25	- 4 027 -0	
	2.25	13.75	10.75	6 4 0 2 7 - 9	
	0.75	10.75	10.75	4 027 -8	
	2.25	12.25	10.75	4 027 -7	
	2.25	12.25	12.25	4 027 -6	
	2.25	13.75	12.25	-+4+027+-5-	
	3.75	13.75	10.75		
	3.75	13.75	12.25	-+4+027+-3-	
	3.75	13.75	12.25	4 0 2 7 - 2	
	3.75	13.75	13.75	4 027 -	
V	′ITY #3 ″ L″	CAVITY #2 " L "	CAVITY #1 " L "	PART NUMBER	A
С	ONTROLLED DOCUMENT.	DWN IOSEP2000 L.A.MAYER CHK IOSEP2000	TE	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC \pm - 1 PLC \pm 0.3 2 PLC \pm 0.25 3 PLC \pm -		S.WELLER APVD IOSEP2000 S.FLICKINGER PRODUCT SPEC IO8-2062 APPLICATION SPEC	ASSEMBLY, POWER, RIGHT ANGLE HEADER, 4 CAVITY, 20.3mm, MULTIGIG		
_	4 PLC ±- ANGLES ±1° FINISH	4- 3062 WE1GHT	SIZE CAGE CODE DRAWING NO	RESTRICTED TO	
	2	CUSTOMER DRAWING	A 1 00779 C-1410		
		CUSIUMER DRAWING		ale 6:1 sheet of RevA6	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: <u>1-1410271-1</u>