

REV. NO.		REV. DATE		REV. BY		REV. APPR.	
CM	54	18-9-07					
C		REVISED PER ECO-13-015791		100072013		KH RH	





Material:

Housing : 30% G.F. NYLON, COLOUR : NATURAL
Actuator : 20% G.F. POLYESTER, COLOUR : RED
Contactors : PHOSPHOR-BRONZE
PLATING : 2,5µm TIN




P.C.B. Hole Dim. Action-Pin	
Drilled Hole:	0,75 ±0,025mm
Fin. Hole:	0,6 to 0,72 mm
Cu-thickness:	0,025 to 0,05 mm
SN-thickness:	0,004 to 0,01 mm

SECTION A-A

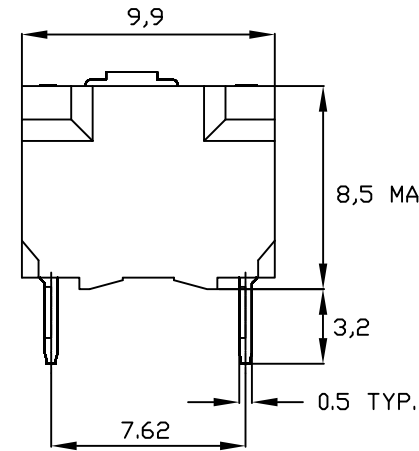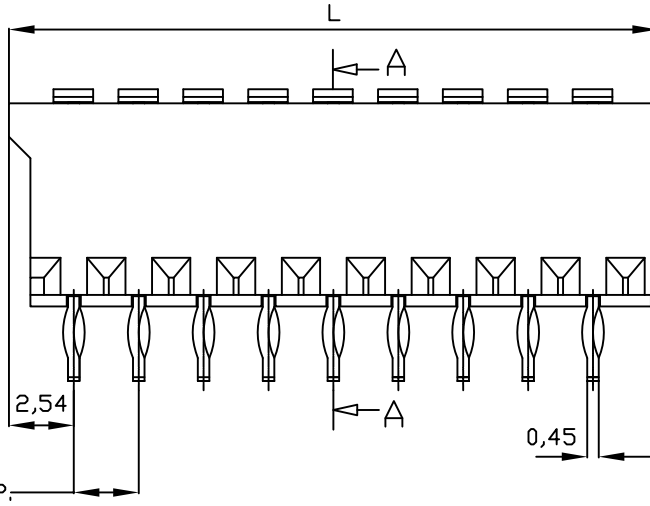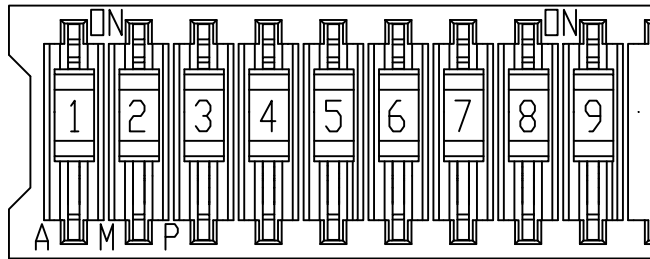


SWITCH HOUSING MAY HAVE
PROFILE A, B OR C



Ø 0,66
TYP.

Recommended PCB Hole Pattern
PCB thickness 1,6mm

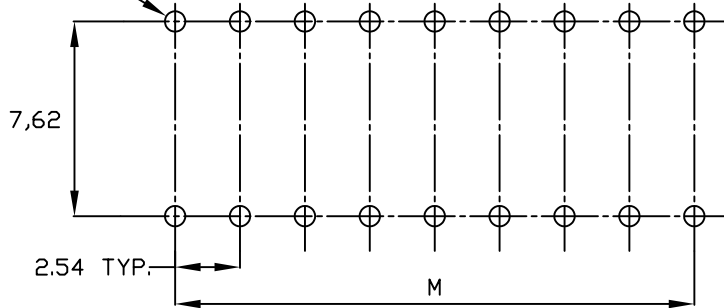

OBSOLETE

PART NUMBER	NUMBER OF POSITIONS	"L" MAX	"M"
0-5338048-1	1	5,08	-
0-5338048-2	2	7,62	2,54
0-5338048-3	3	10,16	5,08
0-5338048-4	4	12,70	7,62
0-5338048-5	5	15,24	10,16
0-5338048-6	6	17,78	12,70
0-5338048-7	7	20,32	15,24
0-5338048-8	8	22,86	17,78
0-5338048-9	9	25,40	20,32

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SA008712 18-9-07	TE Connectivity	
DIMENSIONS: mm		CHK -	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	DIP SWITCH	
0 PLC ± -		PRODUCT SPEC -	ACTION PIN VERSION	
1 PLC ± -		APPLICATION SPEC -	SIZE CAGE CODE DRAWING NO	
2 PLC ± -		WEIGHT -	A1 C- 5338048	
3 PLC ± -		CUSTOMER DRAWING	RESTRICTED TO	
4 PLC ± -		SCALE	SHEET 1 OF 1	
ANGLES ± -		REV C		
FINISH -				

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5338048-4](#)