

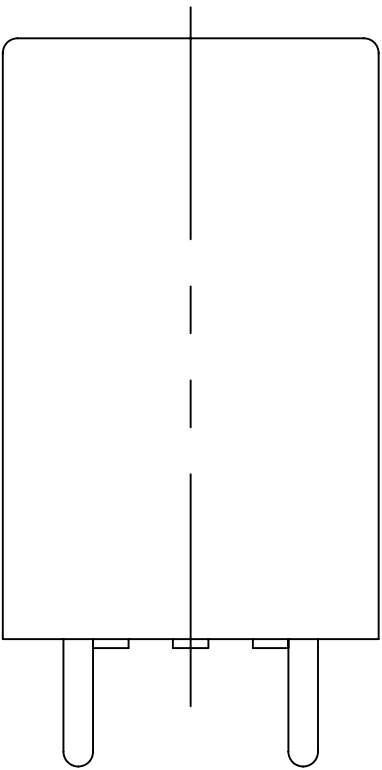


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HB	—		E	CHANGE LOGO, VENT HOLE; ADD CQC, LINE IDENTIFIER AND PLATING THICKNESS ECO-12-005725	21-AUG-12	D.L	BH.Y

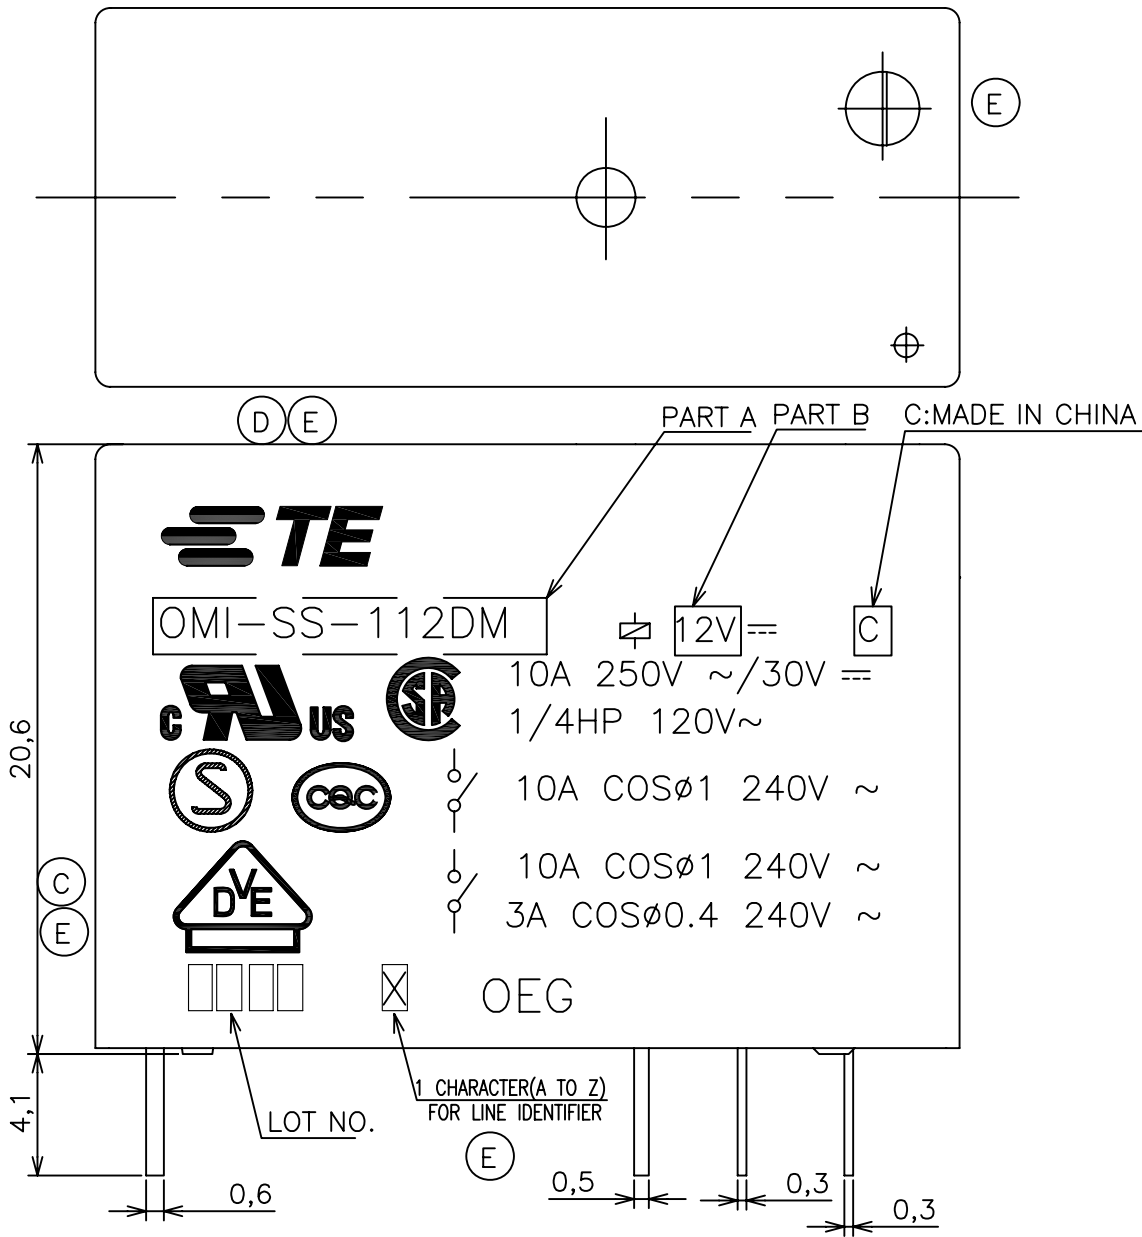


NOTES:
1.-SS- : PLASTIC SEALD TYPE
2.LOT NO. SYSTEM AS FOLLOWING:



3.GENERAL TOLERANCE AS FOLLOWING:

TOLERANCE	
0~0.99mm	±0.1
1mm~2.99mm	±0.2
3mmMIN.	±0.3

4.TERMINAL DIMENSION IS NOT INCLUDING SOLDER TIP.
FOR THE TIN-PLATING OF THE PINS:
+0.1mm FOR WIDTH,THICKNESS AND DIAMETER.
+0.5mm FOR LENGTH.

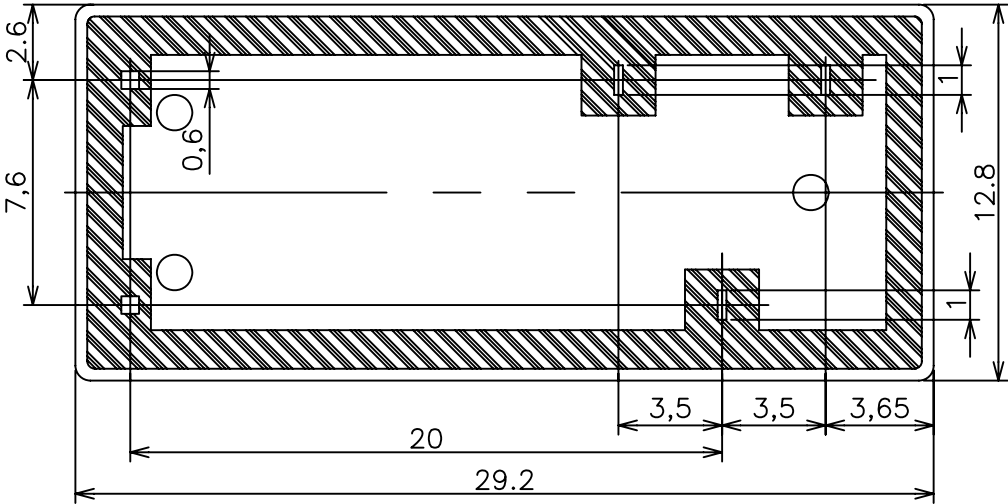

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± -
4 PLC	± -
ANGLES	± -
FINISH	-

MATERIAL

-

DWN
H.SASAKI

CHK
Y.OIKAWA

APVD
A.NAGAI

PRODUCT SPEC
-

APPLICATION SPEC
-

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
-

OMI -SS-D/L CUSTOMER DRAWING

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-4-1440000-6

RESTRICTED TO
-


SCALE
4:1

SHEET
1 of 2


REV
E

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
HB	—					

CONNECTION DIAGRAM
(BOTTOM VIEW)



DRILLING DIAGRAM(2/1)
(BOTTOM VIEW)

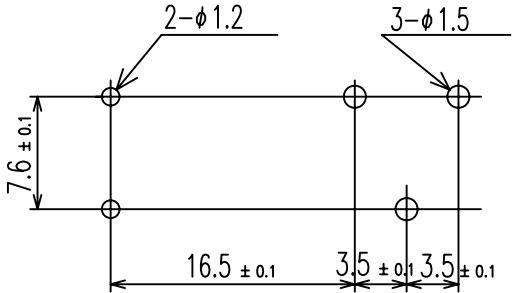

B1	1461385-2	OMI-SS-109D	OMI-SS-109D	9V
	6-1440000-4	OMI-SS-148L	OMI-SS-148L	48V
	6-1440000-3	OMI-SS-148D	OMI-SS-148D	48V
	6-1440000-2	OMI-SS-136D	OMI-SS-136D	36V
	6-1440000-0	OMI-SS-124L	OMI-SS-124L	24V
	5-1440000-8	OMI-SS-124D	OMI-SS-124D	24V
	5-1440000-6	OMI-SS-112L	OMI-SS-112L	12V
	5-1440000-4	OMI-SS-112D	OMI-SS-112D	12V
	5-1440000-3	OMI-SS-109L	OMI-SS-109L	9V
	5-1440000-1	OMI-SS-106L	OMI-SS-106L	6V
	5-1440000-0	OMI-SS-106D	OMI-SS-106D	6V
	4-1440000-8	OMI-SS-105L	OMI-SS-105L	5V
	4-1440000-6	OMI-SS-105D	OMI-SS-105D	5V
	TE PART NO	EC TYPE NAME	PART A	PART B

RELAY TYPE

		EPOXY RESIN	RESIN	17
UL94 V-0		PBT	CASE	16
		—	TAPE	15
CLASS E		UEW	MAGNETIC WIRE	14
UL94 V-0		PET	BASE	13
UL94 V-0		PBT	BOBBIN	12
	SOLDER DIP	CP WIRE	COIL TERMINAL	11
UL94 V-0		PPS	CARD	10
		Ag ALLOY	MOVABLE CONTACT	9
		Ag ALLOY	STATIONARY CONTACT	8
		Cu ALLOY	HINGE SPRING	7
	SOLDER DIP	Cu ALLOY	B TERMINAL	6
	SOLDER DIP	Cu ALLOY	M TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
		STEEL	CORE	3
		STEEL	ARMATURE	2
		STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± —
4 PLC ± —
ANGLES ± —
FINISH —

CUSTOMER DRAWING

DWN
H.SASAKI

CHK
Y.OIKAWA

APVD
A.NAGAI

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

TE Connectivity

NAME
—
OMI -SS-D/L CUSTOMER DRAWING
—

SIZE
A3

CAGE CODE
00779

DRAWING NO
C-4-1440000-6

RESTRICTED TO
—

SCALE
4:1

SHEET
2 of 2

REV
E

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1440000-4](#)