


# Product data sheet

## Characteristics

# XZCR1511040E1

jumper cable XZ - male straight M12 3-pin - female straight M12 3-pin - PUR 1m

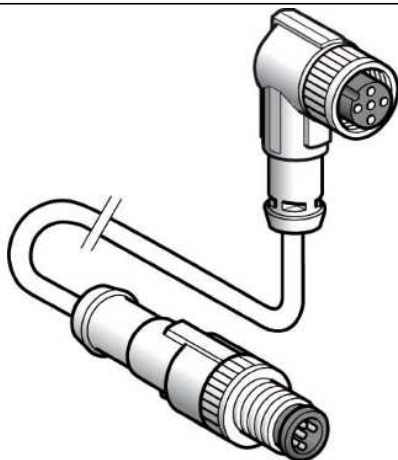

### Main

Accessory / separate part category	Cabling accessories
Accessory / separate part type	Jumper cable
Male connector	M12 3 pins straight, screw-on
Female connector	M12 3 pins straight, screw-on

### Complementary

Cable composition	3 x 0.34 mm <sup>2</sup>
Cable length	1 m
Wire insulation material	PUR
Cable outer diameter	5.2 mm
[Ue] rated operational voltage	300 V DC 250 V AC
[In] rated current	4 A
Insulation resistance	>= 1000 MOhm
Resistance across terminals	<= 5000 MOhm
Product weight	0.065 kg

### Environment

IP degree of protection	IP67
Ambient air temperature for operation	-5...90 °C (flexing) -35...90 °C (static)
Ambient air temperature for storage	-35...100 °C

### Offer Sustainability

Sustainable offer status	Not Green Premium product
RoHS	Compliant - since 0649 - Schneider Electric declaration of conformity <a href="#">download declaration of conformity</a>

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[XZCR1511040E1](#)