


REV. 4
DCO 102710

COIL: @ 25°C	
RESISTANCE	75 OHMS ±10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.5 VDC
MUST RELEASE	.9 VDC

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 15 MS MAX.
OPERATE BOUNCE 5 MS MAX.
RELEASE BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

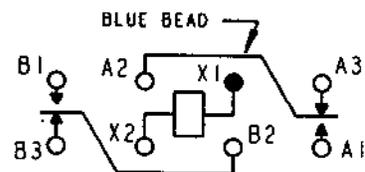

TERMINAL VIEW

CONTACT RATING:	10 AMPS 28 VDC
	5 AMPS 115 VAC/400 Hz RESISTIVE
	50,000 OPERATIONS

DR. BSH 8/17/01 CK.TLG 8-20-Q1



CUST. OPL
CUST. NO. M5757423-006 REV.

"07" RELAY

B07D692BB2-0069

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B07D692BB2-0069](#)