

## UR-Series - UL1077 Recognized Supplementary Protector - 1 pole D-Trip



One Pole



Standard Pack: 12

Weight:

0.3A - 32A



1.75kg (3.86 lb.)

40A - 63A

2.07kg (4.56 lb.)


| Rated Current | Type/<br>Cat. No. | Rated Voltage |
|---------------|-------------------|---------------|
| 0.5A          | 1D05UR            | 277V AC       |
| 1.0A          | 1D1UR             | 277V AC       |
| 2.0A          | 1D2UR             | 277V AC       |
| 3.0A          | 1D3UR             | 277V AC       |
| 4.0A          | 1D4UR             | 277V AC       |
| 5.0A          | 1D5UR             | 277V AC       |
| 6.0A          | 1D6UR             | 277V AC       |
| 8.0A          | 1D8UR             | 277V AC       |
| 10A           | 1D10UR            | 277V AC       |
| 12A           | 1D12UR            | 277V AC       |
| 13A           | 1D13UR            | 277V AC       |
| 15A           | 1D15UR            | 277V AC       |
| 16A           | 1D16UR            | 277V AC       |
| 20A           | 1D20UR            | 277V AC       |
| 25A           | 1D25UR            | 277V AC       |
| 30A           | 1D30UR            | 277V AC       |
| 32A           | 1D32UR            | 277V AC       |
| 40A           | 1D40UR            | 277V AC       |
| 50A           | 1D50UR            | 277V AC       |
| 60A           | 1D60UR            | 277V AC       |
| 63A*          | 1D63UR            | 277V AC       |

\*63A is not UL Recognized.

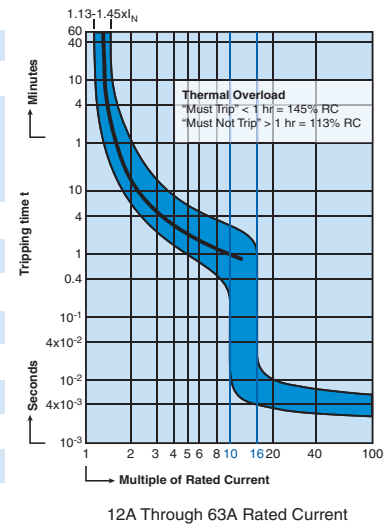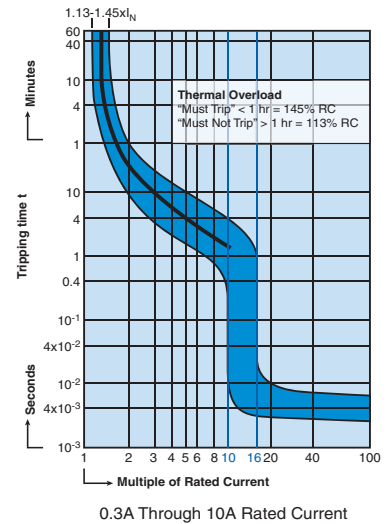

### UR - Series

|                                 |                                                                                                                                     |
|---------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Voltage Rating                  | 0.5-60A / 277V AC                                                                                                                   |
| Short Circuit Withstand Rating  | 0.5 - 10A (RC): 10 kA with no back-up fuse<br>8 - 63A (RC): 10 kA with UL-listed Class J back-up fuse;<br>5 kA with no back-up fuse |
| Calibration Temperature         | 30°C (86°F)                                                                                                                         |
| Ambient Temperature             | -25°C to +55°C (-13°F to 131°F)                                                                                                     |
| Storage Temperature             | -40°C to +70°C (-40°F to 158°F)                                                                                                     |
| Terminal Torque (min/max)       | 2 Nm (17.7 lb.in.) / 2.5Nm (22.2 lb.in.)                                                                                            |
| Electrical Life                 | 6000 switching cycles ON/ OFF                                                                                                       |
| Mechanical Life                 | 10000 switching cycles ON/ OFF                                                                                                      |
| Vibration Resistance            | > 15g according to DIN EN 60069-2-59 during a load with $1.05 \times I_N$                                                           |
| Resistance to mechanical shocks | 25g @ 11ms                                                                                                                          |

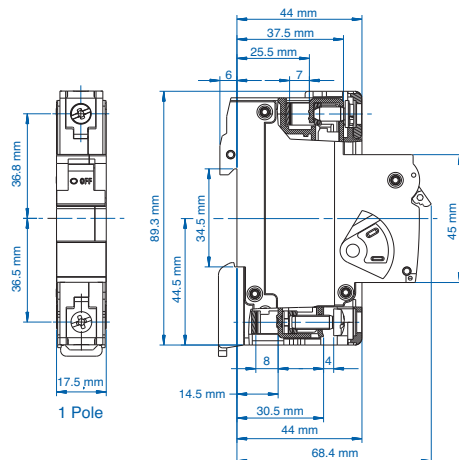

### "D" Magnetic Trip Parameters

Rated current 0.5A to 63A.

1. Hold for a minimum of 100ms at surge of 10 times rated current.
2. Trip in under 100ms at 16 times rated current.

### Short Circuit Withstand Ratings for R-Series Supplementary Protector

| Trip Curve | Amp Range | Backup Protection                 |                                |
|------------|-----------|-----------------------------------|--------------------------------|
|            |           | UL-Listed Class J Fuse up to 10kA | No Backup Fuse Required up to: |
| All        | 0.5 - 10A | 70A                               | 10kA                           |
| All        | 12 - 60A  | 4xRC*                             | 5kA                            |

\*up to nearest rated current

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Altech:](#)

[1D32UR](#) [1D10UR](#) [1D40UR](#) [1D30UR](#) [1D3UR](#) [1D12UR](#) [1D1UR](#) [1D2UR](#) [1D6UR](#) [1D63UR](#) [1D20UR](#) [1D8UR](#)  
[1D4UR](#) [1D13UR](#) [1D05UR](#) [1D60UR](#) [1D50UR](#) [1D5UR](#) [1D25UR](#) [1D15UR](#) [1D16UR](#)