

REV. 0
DCO 17200

COIL: @ 25°C

RESISTANCE 10,000 OHMS ± 10%

NOMINAL VOLTAGE 40.0 VDC

MUST OPERATE 2.0 mA DC

MUST RELEASE

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 15 g's

SHOCK 50 g's 11 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE TIME 15 MS MAX.

RELEASE TIME 10 MS MAX.


CONTACT BOUNCE 2 MS MAX.

CUST. CII STD

CUST. NO. REV.

"SF" RELAY

CUSTOMER DATA SHEET

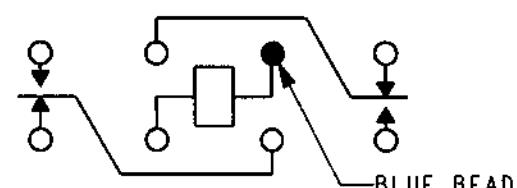

TERMINAL VIEW

CONTACT RATING: LOW LEVEL - 2A

@ 28 VDC RESISTIVE - 5A @ 115 VAC
RESISTIVE 100,000 OPERATIONS

DR. BSH 8/15/01

CK. TIG 8-15-01

CII Technologies
advanced control electronic solutions

SF5101Y00

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[SF5101Y00](#)