



LOC	DIST	REVISIONS				
		F	LTR	DESCRIPTION	DATE	DWN APVD
GP	00	B		REVISED PER ECO-08-020284	20AUG2008	ZMR BAS


D

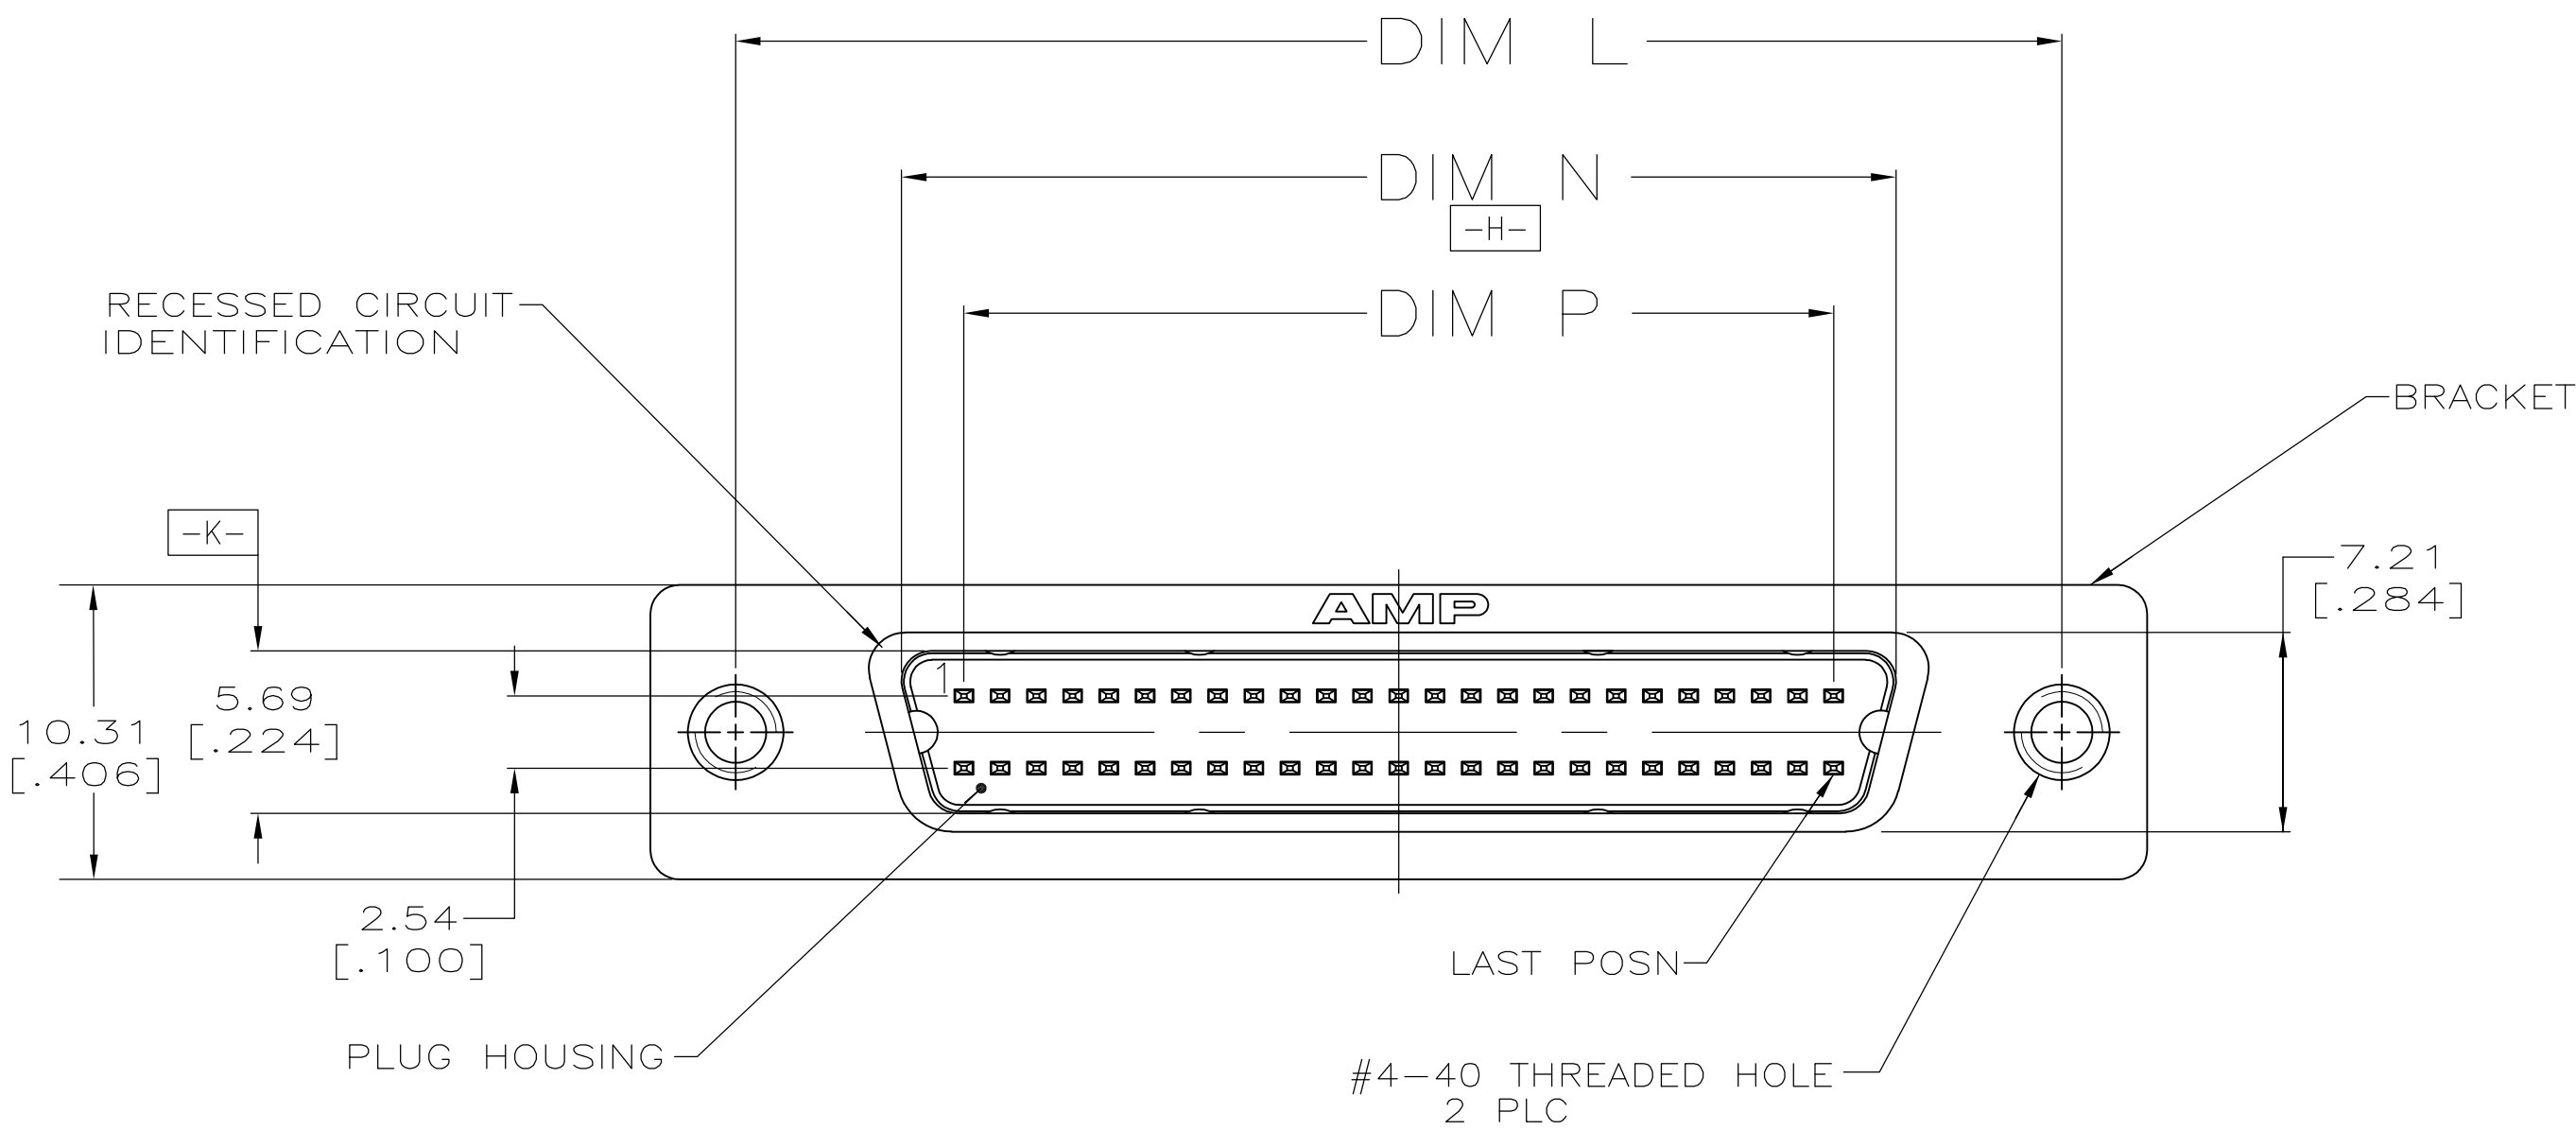

C

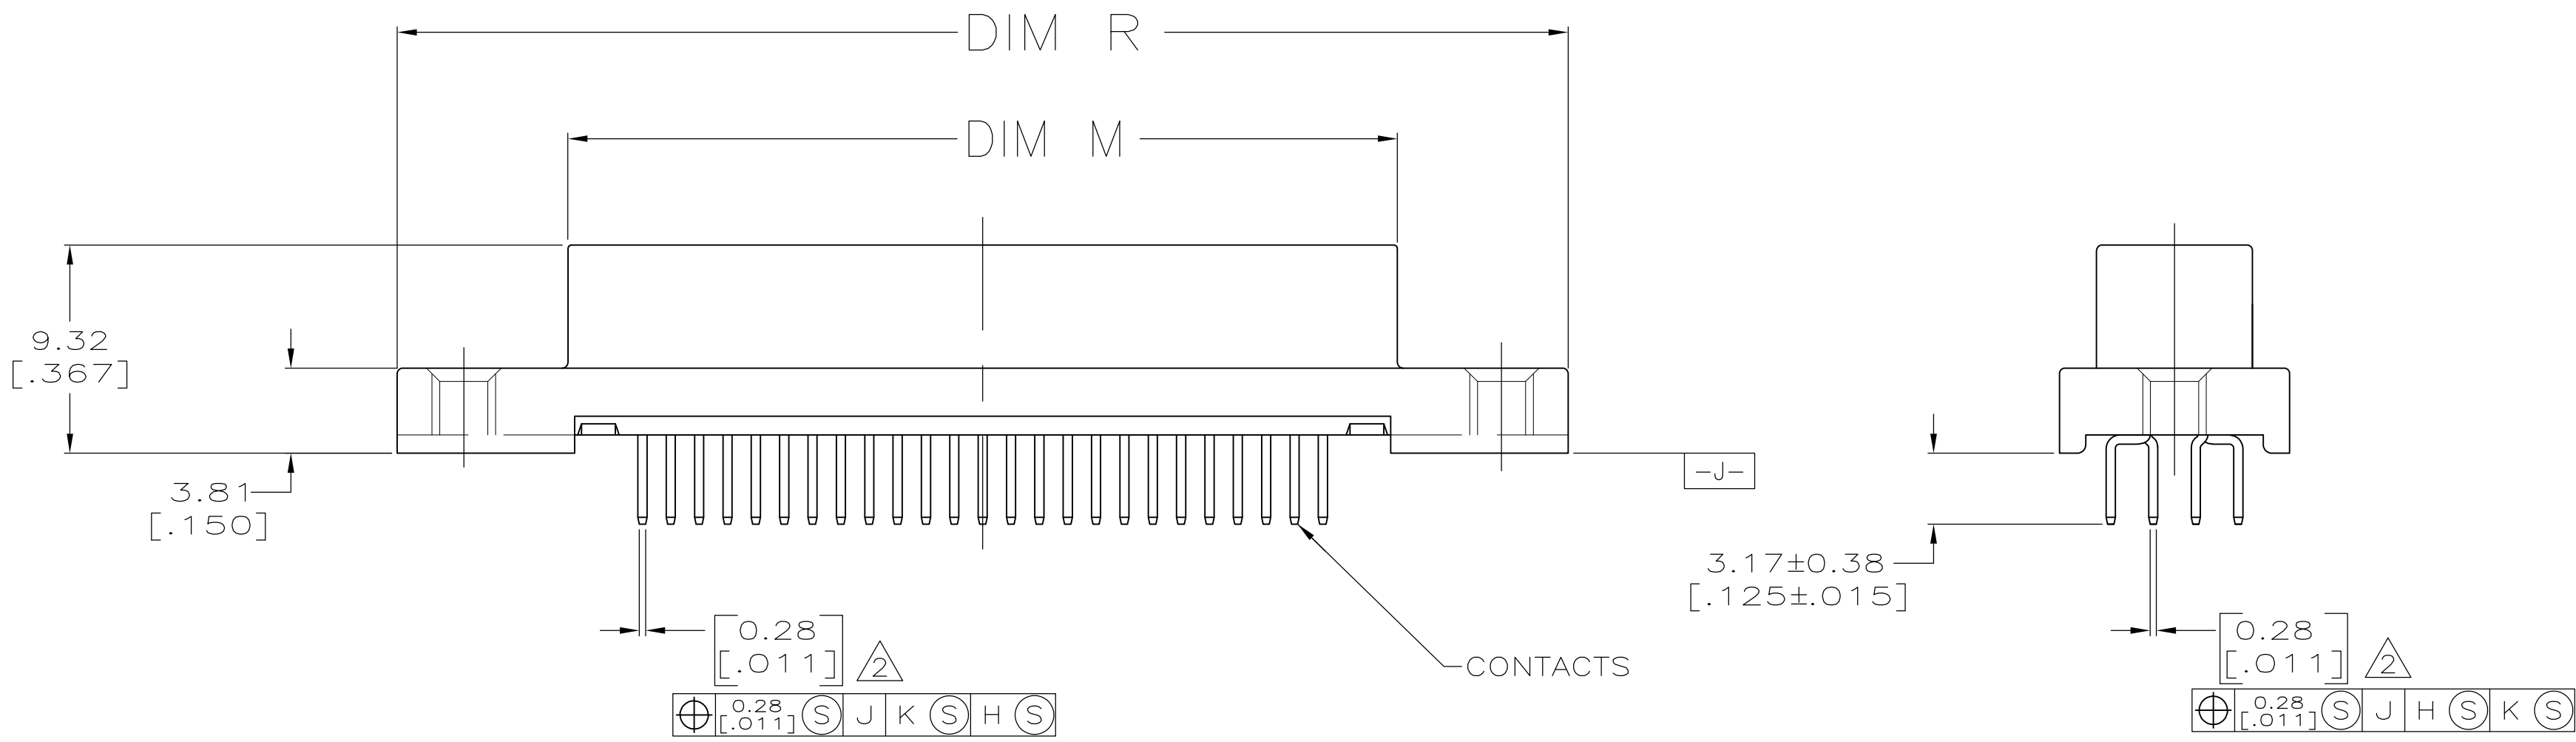

B

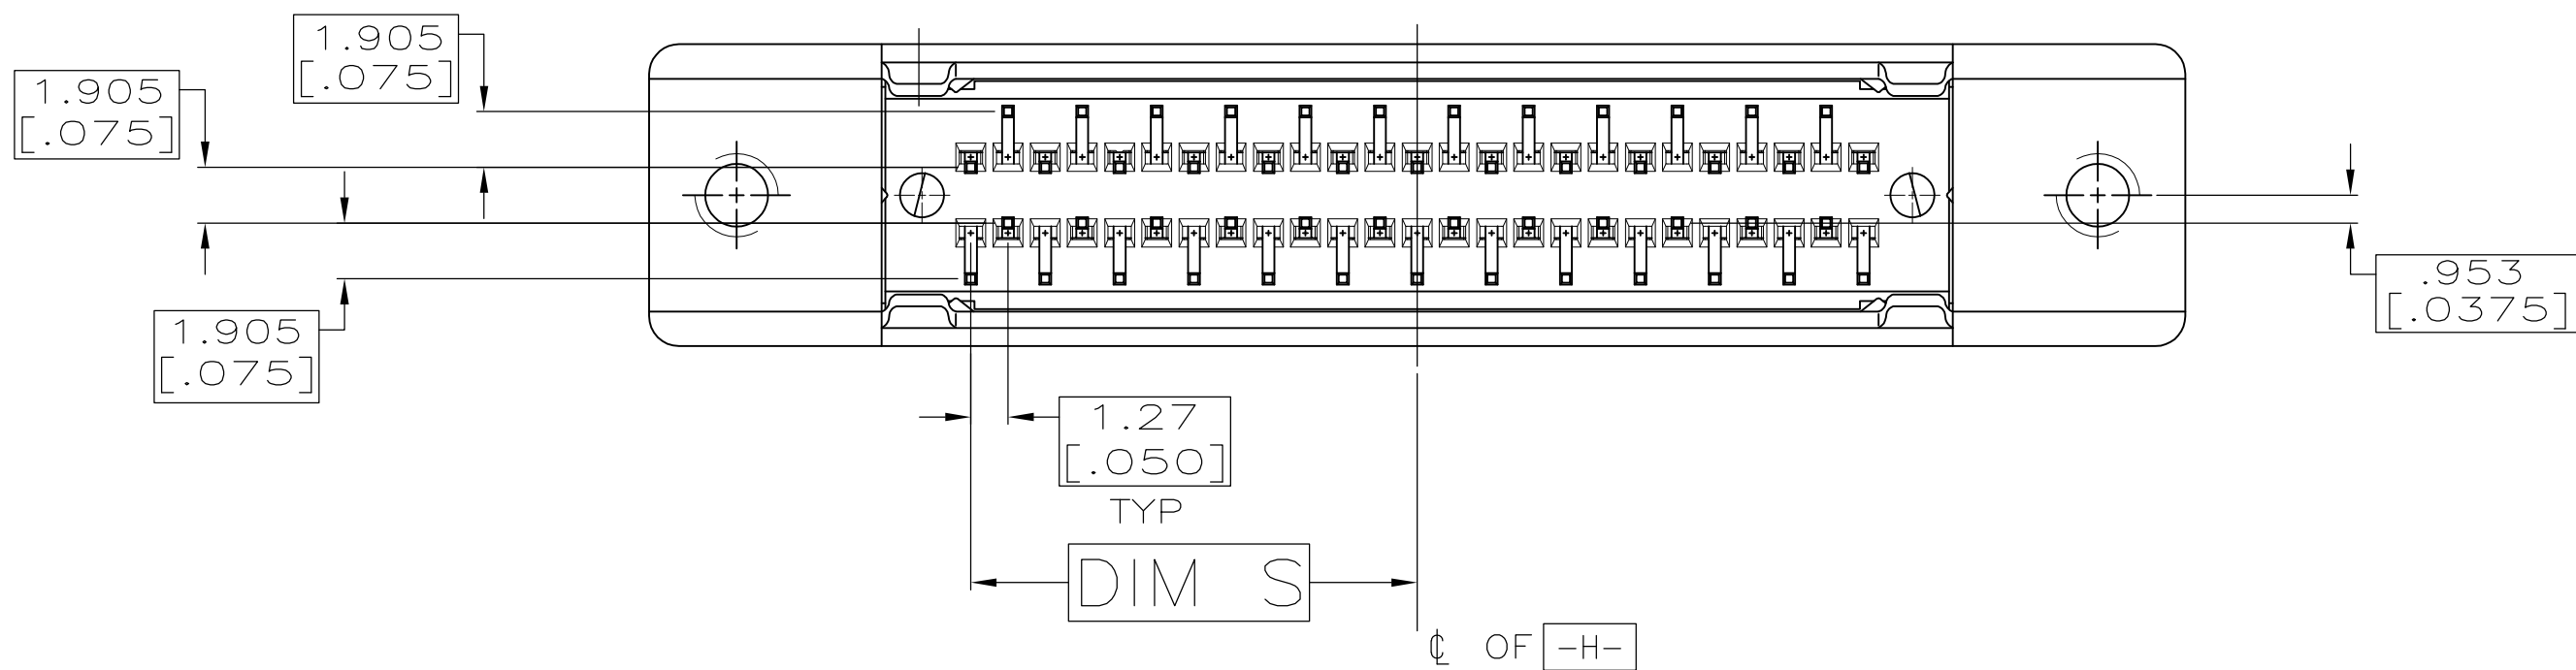


1 FINISH
CONTACTS: EITHER 0.76µm [.000030] MIN GOLD OR GOLD FLASH OVER
PALLADIUM NICKEL, 0.76µm [.000030] MIN TOTAL ON MATING END.
3.05µm [.000120] MIN TIN ON SOLDER LEAD, ALL OVER 1.27µm
[.000050] MIN NICKEL UNDERPLATE.
BRACKET: NICKEL PLATE.

2 POSITION TOLERANCE APPLIES AT TIP ONLY.

3 MATERIAL
CONTACTS: PHOSPHOR BRONZE;
RECEPTACLE HOUSING: UL V-0 RATED POLYESTER LCP COLOR BLACK
BRACKET: ZINC.


4 ACTUAL HOLE SIZE USED WILL DEPEND ON TRACE ROUTING
REQUIREMENTS BETWEEN HOLES AND CONNECTOR PLACEMENT
TECHNIQUE.

D

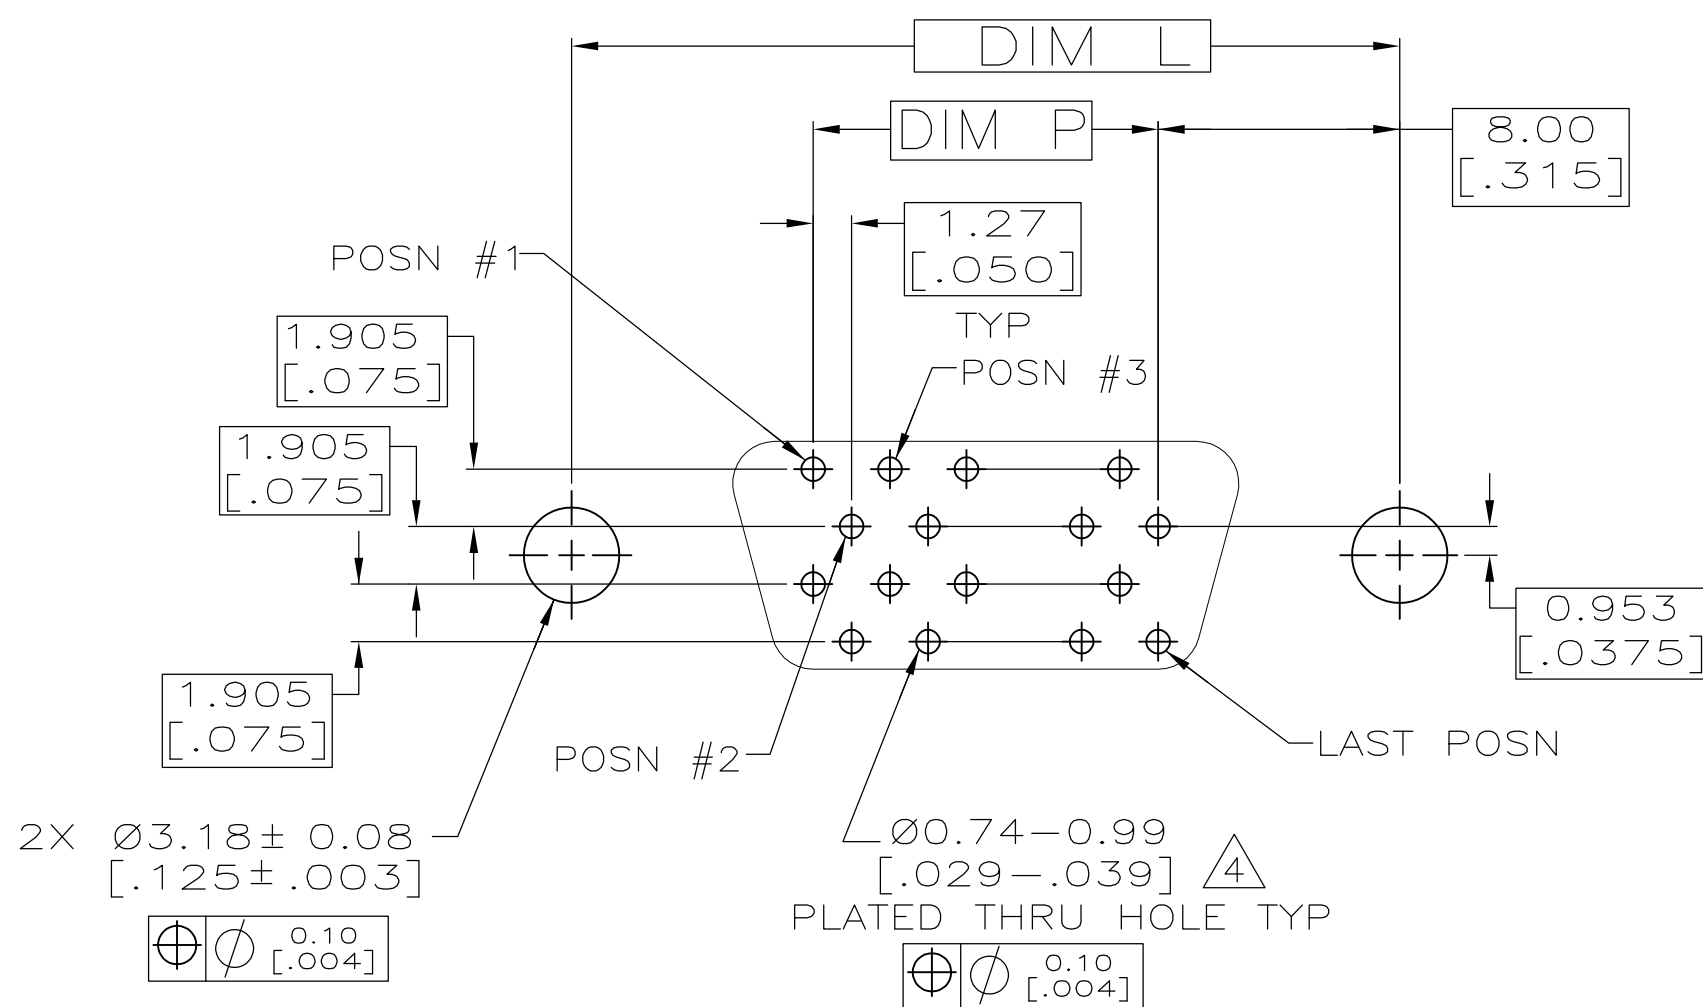

DETAIL X

C

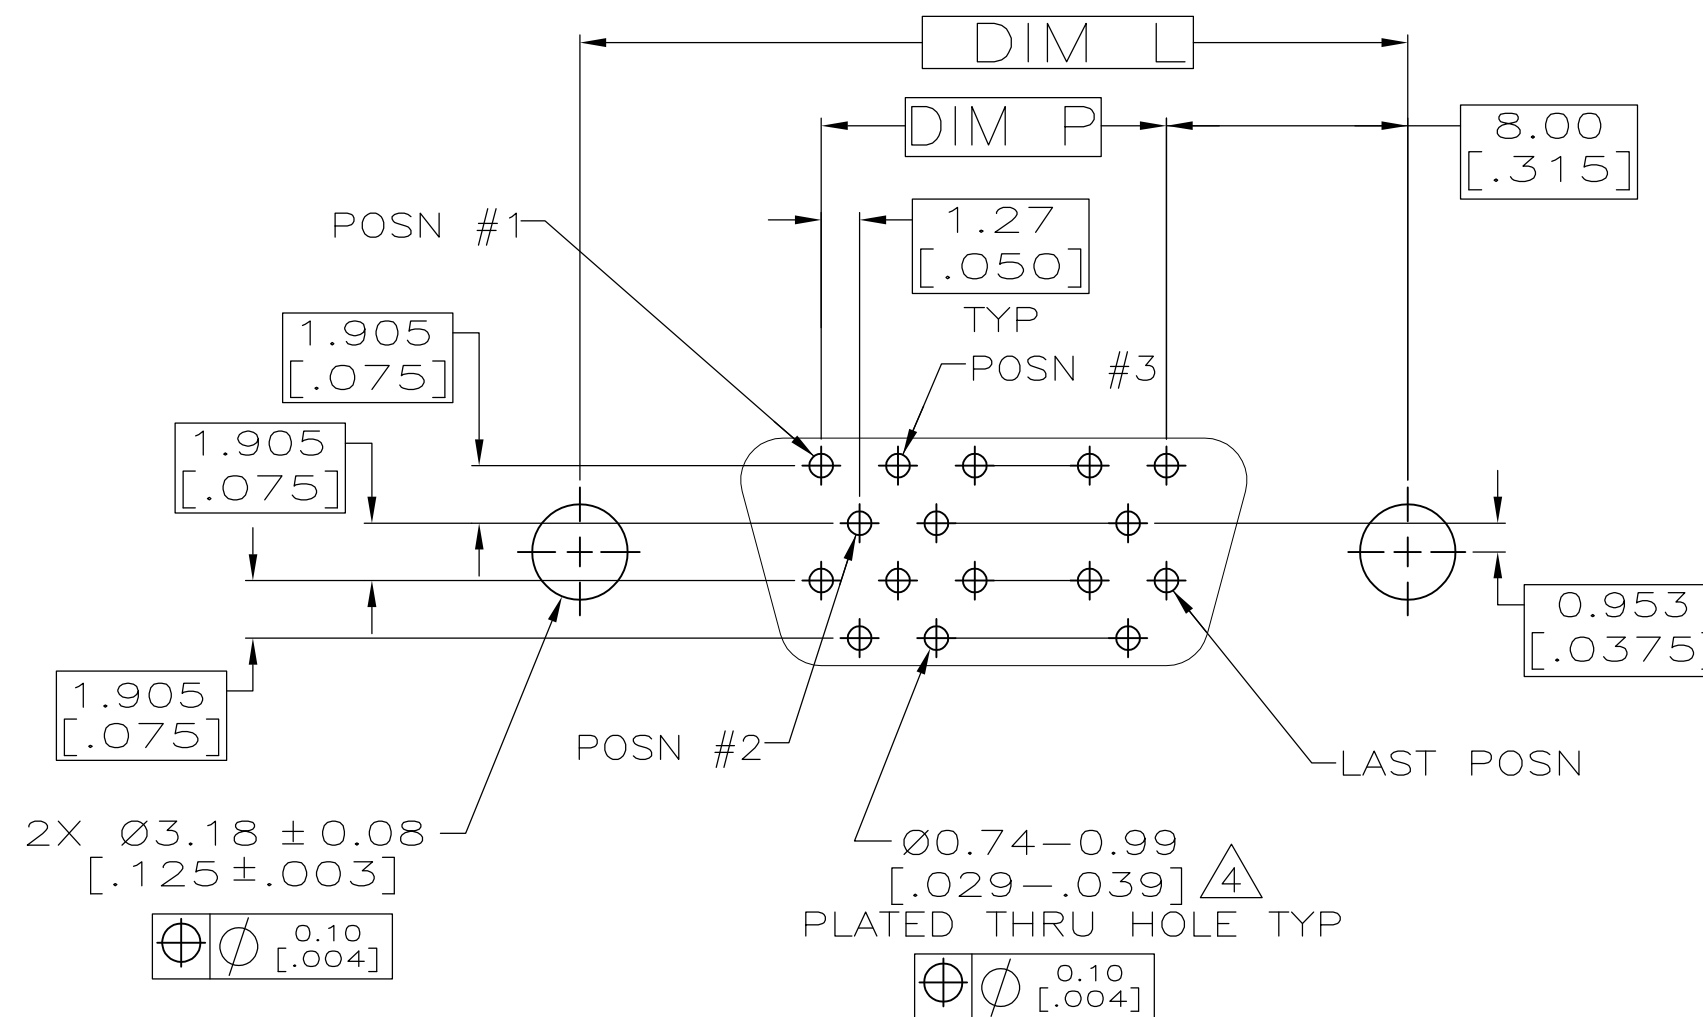

DETAIL Y

P.C.BOARD MOUNTING DIMENSIONS
(CONNECTOR SIDE)

B

50 POSITION AS SHOWN

X	31.11 [1.225]	84.20 [3.315]	62.23 [2.450]	66.60 [2.622]	68.94 [2.714]	78.23 [3.080]	100	5749085-9
Y	15.24 [.600]	52.45 [2.065]	30.48 [1.200]	34.85 [1.372]	37.19 [1.464]	46.48 [1.830]	50	5749085-5
PWB BOARD	S	R	P	N	M	L	NO.OF POSN	PART NO.

**COPYRIGHT 2005
TYCO ELECTRONICS CORP
ALL RIGHTS RESERVED**

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN A. FERNANDEZ-DOCKS 02-28-05	 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	CHK S. SHUEY 02-28-05	NAME M. WALMSLEY	
		PRODUCT SPEC	PLUG ASSEMBLY, SHIELDED, VERTICAL, AMPLIMITE® .050 Series	
	1 P/LC ± — 2 P/LC ± — 3 P/LC ± 0.38 [.015] 4 P/LC ± — ANGLES ± =	APPLICATION SPEC	SIZE A1	
		WEIGHT —	CAGE CODE 00779	
MATERIAL 	FINISH 	CUSTOMER DRAWING		SCALE 4:1
				SHEET 1 OF 1
				REV B

A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5749085-5](#)